

**VITO**

TOOLS FOR THE BRAVE



**POWER  
TOOLS**

'23





# TOOLS FOR WORK BRAVERY





## **VITO Warranty**

All VITO machines and tools are covered by in force legislation on the warranty of movable property for consumers.

The VITO warranty acts as a safety and confidence label when purchasing any machine or tool. In the event of a breakdown, the procedures guarantee replacement with original spare parts or a new machine.

The qualified professional team is available to solve the problem, quickly deliver the machine or tool and clear up technical or usage doubts.

## **After-sales service**

At VITO, after-sales service is a crucial factor and a way of guaranteeing and increasing confidence in tools and machines. VITO's ambition is not only to lead the market in the marketing and distribution of machines and tools, but also to lead in technical and specialised after-sales service support.

This is a factor that elevates the VITO brand with the market and consumers, transmitting confidence to any user of VITO machines and tools.



## Repair service






































Updated stock of parts and components for all references of the range, in order to ensure greater quality and speed in the repair service and warranty.

The specialised team is composed of highly qualified and experienced engineers and mechanics, always available and motivated to ensure that every machine is repaired quickly and accurately.

## Technical assistance

With an area of 2.000m<sup>2</sup>, the technical assistance centre is equipped with specialised repair equipment and machines. It includes 6 performance test rooms in order to assess and test the technical aspects of all machines and tools.

# Table of contents

<p>Page 8</p> <p><b>ego</b></p> <p><b>Machines with Interchangeable Battery 20V</b></p>	<p>VIBCBSFL20</p> <p><b>Percussion combi drill 20V</b></p> <p>Page 10</p> 	<p>VIBCBSFL20</p> <p><b>Brushless combi drill 20V</b></p> <p>Page 10</p> 	<p>VIBCBBMCC</p> <p><b>Brushless combi drill 20V + case + charger</b></p> <p>Page 11</p> 	<p>VIBCAGCB20</p> <p><b>Brushless drywall screwdriver 20V</b></p> <p>Page 11</p> 
<p>VIBCASF20</p> <p><b>Cordless screwdriver 20 V</b></p> <p>Page 13</p> 	<p>VIBCAIBSFL20</p> <p><b>Brushless impact wrench 20V</b></p> <p>Page 13</p> 	<p>VIBCMPSFL20A</p> <p><b>Rotary hammer 20V</b></p> <p>Page 14</p> 	<p>VIBCTICSFL20</p> <p><b>Jig saw 20V</b></p> <p>Page 15</p> 	<p>VIBCSCB14020</p> <p><b>Brushless circular saw 20V - 140mm</b></p> <p>Page 15</p> 
<p>VIBSCSFL20</p> <p><b>Circular saw 20V - 150mm</b></p> <p>Page 16</p> 	<p>VIBCSCB16520</p> <p><b>Brushless circular saw 20V - 165mm</b></p> <p>Page 16</p> 	<p>VIBCSSFL20</p> <p><b>Reciprocating saw 20V</b></p> <p>Page 17</p> 	<p>VIBCMFV20</p> <p><b>Oscillating multi tool 20V</b></p> <p>Page 17</p> 	<p>VIBCRSFL20</p> <p><b>Brushless angle grinder 20V - 115mm</b></p> <p>Page 18</p> 
<p>VIBCRBSFL20A</p> <p><b>Brushless angle grinder 20V - 115mm</b></p> <p>Page 18</p> 	<p>VIBCRBSFL20</p> <p><b>Brushless angle grinder 20V - 125mm</b></p> <p>Page 19</p> 	<p>VIBCPB20</p> <p><b>Brushless polisher 20 V</b></p> <p>Page 19</p> 	<p>VIBCP20</p> <p><b>Electric planer 20V - 82mm</b></p> <p>Page 21</p> 	<p>VIBCLR20</p> <p><b>Belt sander 20V</b></p> <p>Page 21</p> 
<p>VIBCLSF20</p> <p><b>Orbital sander 20V</b></p> <p>Page 22</p> 	<p>VIBCLOT20</p> <p><b>Orbital delta sander 20V</b></p> <p>Page 22</p> 	<p>VIBPCPSFL20</p> <p><b>Cordless air compressor 20V</b></p> <p>Page 23</p> 	<p>VIBCASLB20SFL20</p> <p><b>Brushless wet and dry vacuum cleaner 20V - 20L</b></p> <p>Page 25</p> 	<p>VIBASC12SFL20</p> <p><b>Ash blower/vacuum cleaner 20V - 12L</b></p> <p>Page 25</p> 
<p>VIBCSA20</p> <p><b>Blower/vacuum cleaner 20 V</b></p> <p>Page 26</p> 	<p>VIBPCQ20</p> <p><b>Glue gun 20V</b></p> <p>Page 26</p> 	<p>Page 29</p> <p><b>Power tools</b></p>		<p>VIMSFL4</p> <p><b>Cordless multi-tool 4,0 V</b></p> <p>Page 30</p> 
<p>VIBSFL144A</p> <p><b>Cordless combi drill 14,4 V</b></p> <p>Page 31</p> 	<p>VIBSFL18</p> <p><b>Cordless percussion combi drill 18V</b></p> <p>Page 31</p> 	<p>VIBBSFL20</p> <p><b>Brushless percussion combi drill 20 V - 2.0Ah</b></p> <p>Page 33</p> 	<p>VIBBSFL204</p> <p><b>Brushless percussion combi drill 20V 4.0Ah</b></p> <p>Page 33</p> 	<p>VIBE600</p> <p><b>Percussion drill 600W</b></p> <p>Page 34</p> 
<p>VIBE850</p> <p><b>Percussion drill 850W</b></p> <p>Page 34</p> 	<p>VIBE1050A</p> <p><b>Percussion drill 1050W</b></p> <p>Page 35</p> 	<p>VIMPDP850</p> <p><b>Rotary hammer 850W</b></p> <p>Page 35</p> 	<p>VIMPDP1250</p> <p><b>Rotary hammer 1250W</b></p> <p>Page 36</p> 	<p>VIMPDP1500</p> <p><b>Rotary hammer 1500W</b></p> <p>Page 36</p> 

VIMP1050P

**Rotary hammer**  
1050W



Page 37

VIMP1100

**Rotary hammer**  
1100W



Page 37

VIMP1200

**Rotary hammer**  
1200W



Page 39

VIMP1500

**Rotary hammer**  
1500W



Page 39

VIMD1500

**Demolition hammer**  
1500W - 25J



Page 40

VIMD1700

**Demolition hammer**  
1700W - 50J



Page 40

VIRE11571

**Angle grinder**  
710W - 115mm



Page 44

VIRE11585A

**Angle grinder**  
850W - 115mm



Page 44

VIRE12510A

**Angle grinder**  
1000W - 125mm



Page 45

VIRE23022A

**Angle grinder**  
2200W - 230mm



Page 45

VIRE11510

**Angle grinder**  
1000W - 115mm



Page 47

VIRE23026

**Angle grinder**  
2600W - 230mm



Page 47

VIMAR2400

**Wall chaser**  
2400W - 150mm

**NEW**



Page 48

VISCC15110

**Circular tile saw**  
1550W - 110mm

**NEW**



Page 48

VISCF355

**Cut-off saw**  
2300W - 355mm



Page 49

VIES150B

**Bench grinder**  
250W - 150mm



Page 50

VIES200A

**Bench grinder**  
450W - 200mm



Page 50

VIESC150200

**Combi bench grinder**  
250W - 150mm



Page 51

VIMFC450A

**Drill press**  
450W



Page 52

VIMFC500A

**Drill press**  
500W



Page 52

VISCC12210

**Combined circular saw**  
1200W - 210mm



Page 53

VISCC18250

**Combined circular saw**  
1800W - 250mm

**NEW**



Page 53

VISCME210

**Sliding miter saw**  
1500W - 210mm

**NEW**



Page 54

VISCME255

**Sliding miter saw**  
2100W - 255 mm

**NEW**



Page 55

VISCME305

**Sliding miter saw**  
2200W - 305mm



Page 55

VISCB18A

**Table saw**  
1800W - 250mm

**NEW**



Page 57

VISCB20

**Table saw**  
2000W - 315mm



Page 57

VISC12185A

**Circular saw**  
1500W - 185mm



Page 58

VISC15185

**Table saw**  
1500W - 185mm

**NEW**



Page 58

VISC21235

**Circular saw**  
2100W - 235mm



Page 59

VITIC570

**Jig saw**  
570W



Page 60

VITIC750

**Jig saw**  
750W



Page 60

VIPL6

**Electric planer**  
600W



Page 61

VIPL850

**Electric planer**  
850W



Page 61

VILMB180

**Multi-pad sander**  
180W



Page 62

VILV250

**Finishing sander**  
250W



Page 62

VILO300

**Orbital sander**  
300W



Page 63

VILOP430

**Orbital sander with auxiliary handle**  
430W

**NEW**



Page 63

VILR900

**Belt sander**  
900W



Page 65

VIT1200

**Plunge router**  
1200W



Page 65

# Table of contents

VIMLSF12A  
Cordless multi-tool 12V



Page 66

VIKMF218A  
Mini rotary tool 135W



Page 66

VIAP575  
Nail/staple gun 575W



Page 67

NEW

VIP1200A  
Polisher 1200W - 180mm



Page 67

VIBEP  
Drywall screwdriver 600W



Page 68

VILG800  
Drywall sander 800W



Page 68

VILGE710  
Telescopic drywall sander 710W



Page 69

VIMCC1400A  
Cement-glyce paddle mixer 1400W



Page 70

VIMCCD2050  
Twin cement-glyce paddle mixer 2050W



Page 70

NEW

VIP1500  
Pipe welding machine 1500W



Page 71

NEW

VIPP600  
Paint sprayer 600W



Page 73

NEW

VIMPA850  
Airless paint sprayer 850W



Page 73

NEW

VIPAQ2000  
Hot air gun 2000W



Page 74

NEW

VIPAQR2000  
Adjustable hot air gun 2000W



Page 74

NEW

VIPAQD2000  
Digital hot air gun 2000W



Page 75

NEW

VIGE500  
Electric winch 100/200kg



Page 76

VIGE1000  
Electric winch 250/500kg



Page 76

Page 77

Laser measure and levels

VIMDL20  
Distance laser measurer



Page 78

VIMDAVL60  
Distance, volumes and areas laser measurer



Page 78

VILALC10  
Self-levelling cross-line laser level 10m



Page 79

VILAPHLV2  
Self-levelling laser level horizontal plane 360° + vertical line 10m



Page 79

VILALC20V  
Self-levelling cross green lines 20m



Page 80

NEW

VILAPHVT20V  
Self-levelling laser level horizontal plane 360° + vertical green lines 20m



Page 80

NEW

Page 81

Compressors and accessories

VICSOS6  
Silent oil-free air compressor 6L



Page 82

VICSOS25  
Silent oil-free air compressor 24L



Page 82

VICSOS50  
Silent oil-free air compressor 50L



Page 83

VICO25A  
Oil compressor 24L



Page 84

VICO50A  
Oil compressor 50L



Page 84

VICOC50  
Belt-driven compressor 50L



Page 85

VICOC100  
Belt-driven compressor 100L



Page 85

VICOC200B  
Belt-driven compressor 200L



Page 87

VICOC300B  
Belt-driven three-phase air compressor 300L



Page 87

Page 95

Power generators

VIG38L  
Single-phase generator 3kVA



Page 96

VIG65RL  
Single-phase generator with wheels and handle 6.5kVA



Page 96

VIG8RL  
Single-phase generator with wheels and handle 8 kVA



Page 97

VIGD8ST  
Silent three-phase diesel generator 8kVA (Full Power)



Page 97

NEW

VIG8TRL  
Three-phase generator with wheels and handle 8 kVA



Page 99



VIGI1250

**Inverter generator  
1250**



Page 100

VIGI2000

**Inverter generator  
2000**



Page 100

VIGI3000

**Inverter generator  
3000**



Page 101

**NEW**

VIGD10STA

**Super silent three-phase  
diesel generator  
10 kVA**



Page 102

VIGD15STA

**Super silent three-phase  
diesel generator  
15kVA**



Page 102

VIGD20STA

**Super silent three-phase  
diesel generator  
20kVA**



Page 103

VIGD30ST

**Super silent three-phase  
diesel generator  
30kVA**



Page 103

**NEW**

VIGD40ST

**Super silent three-phase  
diesel generator  
40kVA**



Page 104

**NEW**

VIGD50ST

**Super silent three-phase  
diesel generator  
50kVA**



Page 104

**NEW**

VIGD100ST

**Super silent three-phase  
diesel generator  
100kVA**



Page 105

**NEW**

Page 107

**Welding  
equipment**

VIAS160

**Welding  
machine  
160A**



Page 108

VIAS200

**Welding  
machine  
200A**



Page 108

VIMSF100

**Flux-cored  
welding machine  
100A**



Page 109

VIII40B

**Inverter welder  
140A - 4.5 kVA**



Page 109

**NEW**

VIII150A

**Inverter welder  
150A**



Page 111

**NEW**

VIII170

**Inverter welder  
170A**



Page 111

**NEW**

VII200B

**Inverter welder  
200A**



Page 112

**NEW**

VII250A

**Inverter welder  
250A**



Page 112

**NEW**

Page 115

**High pressure  
washers and  
accessories**

VIML115WR1

**High pressure  
washer  
115bar**



Page 116

VIML130WR2LITE

**High pressure  
washer  
130bar**



Page 116

VIML130WR2

**High pressure  
washer  
130bar**



Page 117

VIML150WR3

**High pressure  
washer  
150bar**



Page 117

VIML180WR4

**High pressure  
washer  
180bar**



Page 119

VIML150HQA

**High pressure  
washer  
Powerwash  
225bar**



Page 121

VIML70

**Petrol high  
pressure  
washer  
250bar**



Page 121

Page 123

**Vacuum cleaners  
and accessories**

VIASL40

**Industrial  
wet and dry  
vacuum  
cleaner  
40L**



Page 124

VIASL75

**Industrial  
wet and dry  
vacuum  
cleaner  
75L**



Page 124

VIAFA25

**Drywall  
vacuum cleaner  
1200W - 25L**



Page 125

**NEW**

VIAS600

**Blower/ vacuum  
cleaner  
600W**



Page 126

**NEW**

VIAC4

**Ash vacuum  
cleaner  
800W - 4L**



Page 126

**NEW**

VIASC18B

**Ash blower/  
vacuum cleaner  
1200W - 18L**



Page 127

VIASC18T

**Ash blower/  
vacuum cleaner  
1400W - 18L**



Page 127

Page 129

**Accessories and  
consumables**

# MACHINES WITH INTERCHANGEABLE BATTERY



**EGO** 20V *Lithium*  
**POWER**



VIBCBSFL20

**Percussion  
combi drill 20V**



Find out more:

VIBCBSFL20

**Brushless  
combi drill 20V**



Find out more:

**Main features:**

- > Variable speed and reverse rotation;
- > Quick-stop function;
- > Metal drill chuck with spindle lock;
- > Impact drilling (hammer function).

**Technical data**

Rated voltage	20 V DC
Speeds	2
No-load speed - 1st speed	0 - 350 rpm
No-load speed - 2nd speed	0 - 1250 rpm
Impact frequency - 1st speed	0 - 5250 ipm
Impact frequency - 2nd speed	0 - 18750 ipm
Maximum torque	35 Nm
Torque setting positions	16
Drill chuck capacity	2 - 13 mm
Steel drilling	13 mm
Wood drilling	35 mm
Concrete block drilling	13 mm
Functions	3
Sound power level (LWA)	95 dB
Weight	1.33 kg
Dimensions	250 x 75 x 195 mm
Weight with packaging	1.54 kg
Packaging dimensions	240 x 85 x 200 mm
Barcode	5604612690229

**Main features:**

- > Brushless motor;
- > Metal drill chuck with spindle lock;
- > Variable speed and reverse rotation;
- > Impact drilling (hammer function).

**Technical data**

Rated voltage	20 V DC
Speeds	2
No-load speed - 1st speed	0 - 500 rpm
No-load speed - 2nd speed	0 - 2000 rpm
Impact frequency - 1st speed	0 - 7500 ipm
Impact frequency - 2nd speed	0 - 30000 ipm
Maximum torque	60 Nm
Torque setting positions	21+1+1
Drill chuck capacity	2 - 13 mm
Steel drilling	13 mm
Wood drilling	35 mm
Concrete block drilling	13 mm
Sound power level (LWA)	86.3 dB
Weight	1.23 kg
Dimensions	185 x 205 x 80 mm
Weight with packaging	1.44 Kg
Packaging dimensions	195 x 215 x 90 mm
Barcode	5604612710880



LED light for work surface illumination



Reversible belt clip



Forward/reverse button



LED light for work surface illumination



Quick tightening



Forward/reverse button

**Packaging content**

- > Reversible belt clip.

Accessories Page 130, 131, 134 to 136, 138, 139

**Packaging content**

- > Reversible belt clip.

Accessories Page 130, 131, 134 to 136, 138, 139

VIBCBBBMCC

## Brushless combi drill 20V + case + charger

**NEW**



Find out more:

VIBCAGCB20

## Brushless drywall screwdriver 20V

**NEW**



Find out more:

### Main features:

- > Brushless motor;
- > Metal drill chuck with spindle lock;
- > Variable speed and reverse rotation;
- > Impact drilling (hammer function).

### Technical data

Rated voltage	20 V DC
Speeds	2
No-load speed - 1st speed	0 - 500 rpm
No-load speed - 2nd speed	0 - 2000 rpm
Impact frequency - 1st speed	0 - 7500 ipm
Impact frequency - 2nd speed	0 - 30000 ipm
Maximum torque	60 Nm
Torque setting positions	21+1+1
Drill chuck capacity	2 - 13 mm
Steel drilling	13 mm
Wood drilling	35 mm
Concrete block drilling	13 mm
Sound power level (LWA)	86,3 dB
Weight	1.23 kg
Dimensions	185 x 205 x 80 mm
Weight with packaging	3 Kg
Packaging dimensions	360 x 285 x 115 mm
Barcode	5604612710897



LED light for work surface illumination



Fast battery charger



BMC case

### Packaging content

- > BMC case;
- > Fast charger;
- > Reversible belt clip.

Accessories Page 130, 131, 134 to 136, 138, 139

### Main features:

- > Brushless motor;
- > Adjustment of screwing depth;
- > Variable speed and reverse rotation;
- > ON/OFF switch lock-on button.

### Technical data

Rated voltage	20 V DC
No-load speed	0 - 4400 rpm
Bit drive	Hexagonal - 1/4"
Maximum screw diameter	6 mm
Sound power level (LWA)	86 dB
Weight	0.99 Kg
Dimensions	230 x 220 x 90 x mm
Weight with packaging	1.18 Kg
Packaging dimensions	265 x 230 x 100 mm
Barcode	5604612727000



Belt clip



LED light for work surface illumination



Precise adjustment

### Packaging content

- > Reversible belt clip.

Accessories Page 130, 139



VIBCASF20

## Cordless screwdriver 20V



Find out more:

VIBCAIBSFL20

## Brushless impact wrench 20V



Find out more:

### Main features:

- > Variable speed and reverse rotation;
- > Quick-stop function.

### Technical data

Rated voltage	20 V DC
Speeds	1
No-load speed	0 - 2200 rpm
Impact frequency	0 - 3000 ipm
Maximum torque	180 Nm
Drive	Hexagonal
Sound power level (LWA)	106 dB
Weight	1.17 Kg
Dimensions	180 x 70 x 195 mm
Weight with packaging	1.3 Kg
Packaging dimensions	220 x 85 x 200 mm
Barcode	5604612702137



LED light for work surface illumination



Reversible belt clip

### Packaging content

- > Reversible belt clip.

Accessories Page 132

### Main features:

- > Brushless motor;
- > Variable speed and reverse rotation;
- > Quick-stop function;
- > Speed setting button with LED indication light;
- > Control of the loosening function.

### Technical data

Rated voltage	20 V DC
No-load speed - 1st speed - LED 1	0 - 1800 rpm
No-load speed - 2nd speed - LED 2	0 - 2100 rpm
No-load speed - 3rd speed - LED 3	0 - 2700 rpm
Impact frequency - 1st speed - LED 1	0 - 2520 ipm
Impact frequency - 2nd speed - LED 2	0 - 2940 ipm
Impact frequency - 3rd speed - LED 3	0 - 3780 ipm
Maximum torque - LED 1	220 Nm
Maximum torque - LED 2	250 Nm
Maximum torque - LED 3	300 Nm
Drive	1/2 "
Sound power level (LWA)	80 dB
Weight	1.16 Kg
Dimensions	160 x 205 x 80 mm
Weight with packaging	1.34 Kg
Packaging dimensions	212 x 165 x 90 mm
Barcode	5604612710903



Speed setting button



Drive 1/2"



Non-slip rubber grip

### Packaging content

- > Reversible belt clip.

Accessories Page 133



VIBCMP5FL20A

## Rotary hammer 20V



Find out more:



### Main features:

- > Brushless motor;
- > Variable speed and reverse rotation;
- > Quick-stop function;
- > Spindle lock;
- > Impact drilling (hammer function).



LED light for work surface illumination



Mode selector knob



SDS-Plus chuck

### Technical data

Rated voltage	20 V DC
Impact energy	2.2 J
No-load speed	0 - 1420 rpm
Impact frequency	0 - 4500 ipm
Drill chuck	SDS-Plus
Steel drilling	13 mm
Concrete drilling	22 mm
Wood drilling	28 mm
Functions	3
Sound power level (L <sub>WA</sub> ) - chiselling	97 dB
Weight	2.30 Kg
Dimensions	290 x 80 x 200 mm
Weight with packaging	2.50Kg
Packaging dimensions	296 x 90 x 232 mm
Barcode	5604612702083

### Packaging content

- > Auxiliary handle;
- > Depth stop.

Accessories Page 136, 137



VIBCTICSFL20

## Jig saw 20 V



Find out more:

VIBCSCB14020

## Brushless circular saw 20V - 140mm

**NEW**



Find out more:

### Main features:

- > Quick blade change;
- > Acrylic blade guard;
- > ON/OFF switch lock-on button;
- > Aluminium base plate.

### Technical data

Rated voltage	20 V DC
Number of strokes at no load	2400 spm
Stroke length	25 mm
Pendulum movement positions	4
Type of blade	HCS/HSS
Cutting angle	45° / 0° / 45°
Steel cutting capacity	10 mm
Plastic cutting capacity	12 mm
Wood cutting capacity	80 mm
Metal tube cutting capacity	Ø 5 - 25 mm
Sound power level (LWA)	90 dB
Weight	1.7 Kg
Dimensions	255 x 90 x 210 mm
Weight with packaging	1.99 Kg
Packaging dimensions	235 x 95 x 225 mm
Barcode	5604612690236



LED light for work surface illumination



Dust and shavings suction port adaptor



Pendulum movement adjustment knob

### Packaging content

- > Blade for wood cutting;
- > Parallel guide;
- > Dust and shavings suction port adaptor;
- > Hex key.

Accessories Page 144

### Main features:

- > Brushless motor;
- > Spindle lock for blade change;
- > ON/OFF switch lock-on button;
- > Blade guard;
- > Aluminium base plate.

### Technical data

Rated voltage	20 V DC
No-load speed	6000 rpm
Blade diameter	140 mm
Bore diameter diameter	20 mm
Blade thickness	1.6 mm
Number of teeth on the blade	24
Cutting angle	0 - 45°
Maximum cutting depth (0°)	50 mm
Maximum cutting depth (45°)	35 mm
Sound power level (LWA)	83 dB
Weight	2 Kg
Dimensions	365 x 155 x 160 mm
Weight with packaging	2.20 Kg
Packaging dimensions	360 x 185 x 240 mm
Barcode	5604612726966



Adjustable cutting depth and slope



Laser guide



Dust and shavings suction port adaptor

### Packaging content

- > Blade for wood cutting 140 mm;
- > Parallel guide;
- > Hex key.

Accessories Page 142

VIBCSCSFL20

**Circular saw**  
20V - 150mm



Find out more:

VIBCSCB16520

**Brushless circular saw** 20V - 165mm



**NEW**



Find out more:

**Main features:**

- > Spindle lock for blade change;
- > ON/OFF switch lock-on button;
- > Blade guard;
- > Aluminium base plate.

**Technical data**

Rated voltage	20 V DC
Blade diameter	150 mm
Bore diameter diameter	10 mm
Blade thickness	1,6 mm
Number of teeth on the blade	24
Cutting angle (miter)	0 - 45°
Maximum cutting depth (0°)	48 mm
Maximum cutting depth (45°)	36 mm
No-load speed	4200 rpm
Sound power level (LWA)	90 dB
Weight	2.5 Kg
Dimensions	310 x 160 x 250 mm
Weight with packaging	3.22 Kg
Packaging dimensions	315 x 200 x 285 mm
Barcode	5604612690267

**Main features:**

- > Brushless motor;
- > Spindle lock for blade change;
- > ON/OFF switch lock-on button;
- > Blade guard;
- > Aluminium base plate.

**Technical data**

Rated voltage	20 V DC
Blade diameter	165 mm
Bore diameter diameter	20 mm
Blade thickness	1,6 mm
Number of teeth on the blade	24
Cutting angle (miter)	0 - 45°
Maximum cutting depth (0°)	51 mm
Maximum cutting depth (45°)	37 mm
No-load speed	4200 rpm
Sound power level (LWA)	86 dB
Weight	2.87 Kg
Dimensions	310 x 165 x 255 mm
Weight with packaging	3.10 Kg
Packaging dimensions	315x 200 x 200 mm
Barcode	5604612726997



Adjustable cutting depth and slope



Laser guide




Dust and shavings suction port adaptor



Adjustable cutting depth and slope



Laser guide



Dust and shavings suction port adaptor

**Packaging content**

- > Blade for wood cutting 150 mm;
- > Parallel guide;
- > Hex key.

Accessories Page 142

**Packaging content**

- > Blade for wood cutting 165 mm;
- > Parallel guide;
- > Hex key.

Accessories Page 142

VIBCSSFL20

## Reciprocating saw 20 V



Find out more:

VIBCMFV20

## Oscillating multi tool 20V



**NEW**



Find out more:

### Main features:

- > Quick blade change;
- > Safety button;
- > Variable speed.

### Technical data

Rated voltage	20 V DC
Number of strokes at no load	0 - 3000 cpm
Stroke length	22 mm
Wood cutting capacity	115 mm
Metal cutting capacity	10 mm
Sound power level (LWA)	92 dB
Weight	1.9 Kg
Dimensions	400 x 70 x 190 mm
Weight with packaging	2.25 Kg
Packaging dimensions	415 x 85 x 185 mm
Barcode	5604612702120

### Main features:

- > Variable speed;
- > 3 functions: sanding, cutting and scraping;
- > Metal gearbox;
- > Velcro-type fastening of the sanding sheets;
- > Dust and shavings suction tube.

### Technical data

Rated voltage	20 V DC
No-load speed	5000 - 20000 rpm
Speed setting levels	6
Oscillation angle	3°
Sound power level (LWA)	108 dB
Weight	1.23 Kg
Dimensions	295 x 200 x 140 mm
Weight with packaging	1.90 Kg
Packaging dimensions	310 x 145 x 150 mm
Barcode	5604612726942



Adjustable head




Quick blade change - without use of tools



Safety button



Quick blade change - without use of tools



Dual LED light for work surface illumination



Included accessories

### Packaging content

- > Blade for wood cutting;
- > Blade for metal cutting.

Accessories Page 144

### Packaging content

- > Saw blade;
- > Metal spatula;
- > Sanding pad;
- > Sanding sheets P80 (x2);
- > Sanding sheets P120 (x2);
- > Sanding sheets P180 (x2);
- > Sanding sheets P240 (x2).

VIBCRSFL20

**Angle grinder**  
20V - 115mm



Find out more:

VIBCRBSFL20A

**Brushless angle grinder**  
20V - 115mm



Find out more:

**Main features:**

- > Quick-stop function;
- > Adjustable disc guard;
- > Spindle lock;
- > Metal gearbox.

**Technical data**

Rated voltage	20 V DC
No-load speed	10000 rpm
Disc diameter	115 mm
Spindle thread	M14
Auxiliary handle	2
Sound power level (LWA)	96 dB
Weight	1.7 Kg
Dimensions	340 x 230 x 110 mm
Weight with packaging	1.96 Kg
Packaging dimensions	350 x 135 x 110 mm
Barcode	5604612690243



Metal gearbox



2-position auxiliary handle

**Packaging content**

- > Disc 115 mm;
- > Disc guard;
- > Pin spanner;
- > Auxiliary handle.

Accessories Page 140 to 143, 145

**Main features:**

- > Brushless motor;
- > Quick-stop function;
- > Adjustable disc guard;
- > Spindle lock;
- > Metal gearbox.

**Technical data**

Rated voltage	20 V DC
No-load speed	10000 rpm
Disc diameter	115 mm
Spindle thread	M14
Auxiliary handle	3
Sound power level (LWA)	97,2 dB
Weight	1.5 Kg
Dimensions	185 x 205 x 80 mm
Weight with packaging	2.05 Kg
Packaging dimensions	320 x 115 x 145 mm
Barcode	5604612720988



Black lacquered metal gearbox



Ventilation slot



3-position auxiliary handle

**Packaging content**

- > Disc 115 mm;
- > Disc guard;
- > Pin spanner;
- > Auxiliary handle.

Accessories Page 140 to 143, 145

VIBCRBSFL20

## Brushless angle grinder

20V - 125mm

**NEW**



Find out more:

VIBCPB20

## Brushless polisher

20 V

**NEW**



Find out more:

### Main features:

- > Brushless motor;
- > Quick-stop function;
- > Adjustable disc guard;
- > Spindle lock;
- > Metal gearbox.

### Technical data

Rated voltage	20 V DC
No-load speed	10000 rpm
Disc diameter	125 mm
Spindle thread	M14
Auxiliary handle	3
Sound power level (LWA)	97,2 dB
Weight	1.5 Kg
Dimensions	185 x 205 x 80 mm
Weight with packaging	2.05 Kg
Packaging dimensions	320 x 115 x 145 mm
Barcode	5604612710927



Black lacquered metal gearbox



Ventilation slot



3-position auxiliary handle

### Packaging content

- > Disc 125 mm;
- > Disc guard;
- > Pin spanner;
- > Auxiliary handle.

Accessories Page 140 to 143, 145

### Main features:

- > Brushless motor;
- > Variable speed;
- > Spindle lock for disc change;
- > Safety button;
- > Metal gearbox.

### Technical data

Rated voltage	20 V DC
No-load speed	800-2300 rpm
Polishing pad diameter	180 mm
Spindle thread	M14
Speed setting levels	6
Sound power level (LWA)	88 dB
Weight	2.1 Kg
Dimensions	440 x 215 x 200 mm
Weight with packaging	2.75 Kg
Packaging dimensions	460 x 150 x 178 mm
Barcode	5604612727017



6 speed-setting levels



Wool polishing pad



Velcro backing pad

### Packaging content

- > Velcro backing pad;
- > Wool polishing pad;
- > Flat foam polishing pad;
- > Embossed surface foam polishing pad;
- > Auxiliary handle.

Accessories Page 146



VIBCPL20

## Electric planer

20V - 82mm

**NEW**



Find out more:

VIBCLR20

## Belt sander 20V

**NEW**



Find out more:

### Main features:

- > ON/OFF switch lock-on button;
- > Dust and shavings collection bag.

### Technical data

Rated voltage	20 V DC
No-load speed	16000 rpm
Maximum cutting width	82 mm
Maximum cutting depth	1.5 mm
Maximum cutting depth	82 x 80 mm
Sound power level (LWA)	106 dB
Weight	2.58 Kg
Dimensions	310 x 255 x 200 mm
Weight with packaging	2.90 Kg
Packaging dimensions	310 x 175 x 180 mm
Barcode	5604612726959

### Main features:

- > Quick sanding belt change system;
- > 3-position adjustable auxiliary handle;
- > ON/OFF switch lock-on button.

### Technical data

Rated voltage	20 V DC
No-load speed	120 - 350 rpm
Speed setting levels	6
Type of sandpaper	Sanding belt
Sanding belt dimensions	76 x 457 mm
Sanding surface	76 x 120 mm
Sound power level (LWA)	89 dB
Weight	2.4 Kg
Dimensions	265 x 145 x 190 mm
Weight with packaging	2.80 Kg
Packaging dimensions	280 x 160 x 190 mm
Barcode	5604612726973



Cutting depth adjustment



Safety catch for blade guard



Wrench for blade change



Sanding belt adjustment screw



Dust and shavings collection bag



6 Speed setting levels

### Packaging content

- > Parallel guide;
- > Rebate depth guide;
- > Double open-end spanner;
- > Hex key;
- > Dust and shavings collection bag.

### Packaging content

- > Sanding belt;
- > Dust and shavings collection bag.

Accessories Page 148

VIBCLOSFL20

## Orbital sander 20V



Find out more:

VIBCL0T20

## Orbital delta sander 20V



Find out more:

### Main features:

- > Velcro-type fastening of the sanding sheets;
- > Variable speed;
- > On/Off switch protected against dust penetration.

### Technical data

Rated voltage	20 V DC
No-load speed	2000 - 10000 rpm
Speed setting levels	6
Oscillating circuit diameter	2 mm
Type of sandpaper	Sanding sheet
Sanding sheet dimensions	125 mm
Backing pad diameter	125 mm
Sound power level (LWA)	98 dB
Weight	1.10 Kg
Dimensions	260 x 125 x 160 mm
Weight with packaging	1.25 Kg
Packaging dimensions	182 x 128 x 166 mm
Barcode	5604612703424

### Main features:

- > Velcro-type fastening of the sanding sheets;
- > Soft grip for a more comfortable work.

### Technical data

Rated voltage	20 V DC
No-load speed	11000 rpm
Type of sandpaper	Sanding sheet
Sanding sheet dimensions	145 x 100 mm
Sanding surface	145 x 100 mm
Sound power level (LWA)	87 dB
Weight	0.87Kg
Dimensions	240 x 100 x 140 mm
Weight with packaging	1.13 Kg
Packaging dimensions	265 x 118 x 160 mm
Barcode	5604612726980



6 speed-setting levels



Velcro-type fastening of the sanding sheets




Included accessories



Dust and shaving tank



Velcro-type fastening of the sanding sheets



Included accessories

### Packaging content

- > Sanding discs (x2);
- > Dust and shavings suction port adaptor;
- > Dust and shavings collection bag.

Accessories Page 147, 148

### Packaging content

- > Dust and shavings tank;
- > Sanding sheets (x3).

Accessories Page 147, 148





VIBCPCSFL20

## Cordless air compressor 20V



Find out more:



### Main features:

- > 2 push-buttons to adjust the pressure;
- > Front LED light;
- > Maximum pressure of 7 bar/101 psi.



LED light for work surface illumination



Holder for universal adaptors and air hose



Backlit digital display

### Technical data

Rated voltage	20 V DC
Maximum pressure	7 bar   101 psi
Sound power level (LWA)	91,5 dB
Weight	0.752 Kg
Dimensions	160 x 200 x 65 mm
Weight with packaging	0.917 kg
Packaging dimensions	170 x 210 x 75mm
Barcode	5604612710910

### Packaging content

- > Air hose with car valve adaptor;
- > Ball inflating needle;
- > Bike tire valves;
- > Universal adaptors.



VIBCASLB20SFL20

## Brushless wet and dry vacuum cleaner 20V - 20L



Find out more:

VIBCASC12SFL20

## Ash blower/vacuum cleaner 20V - 12L



Find out more:

### Main features:

- > Brushless motor;
- > Suitable for both indoor or outdoor use;
- > 20-litre stainless steel tank;
- > Hepa filter;
- > Flexible and easy to access the hardest to reach areas.

### Technical data

Rated voltage	20V DC
Speeds	2
Rated power	180 W
Suction power - 1st speed	12 kg
Suction power - 2nd speed	18 kg
Airflow	0.84 m <sup>3</sup> /min
Tank capacity	20 L
Type of vacuumed materials	Solids and liquids
Suction hose	1.5 x 32 mm
Type of filter	HEPA
Weight	2.8 kg
Dimensions	310 x 340 x 515 mm
Weight with packaging	5.590 kg
Packaging dimensions	335 x 440 x 335mm
Barcode	5604612715144



Metal latches



Washable HEPA particle filter



2-speed switch

### Packaging content

- > Suction hose;
- > Telescopic metal suction tube;
- > HEPA filter;
- > Floor nozzle;
- > Round brush;
- > Crevice nozzle;
- > Wheels.

Accessories Page 128

### Main features:

- > Includes blower function;
- > Ideal for cleaning fireplaces, barbecues, wood cookers, pellets, etc;
- > Hepa filter;
- > 12-litre stainless steel tank.

### Technical data

Rated voltage	20V DC
Rated power	150 W
Suction power	9 kg
Airflow	0.6 m <sup>3</sup> /min
Tank capacity	12 L
Maximum temperature of vacuumed materials	40 °C
Type of vacuumed materials	Solids
Suction hose	1 m x 35 mm
Metal suction tube	230 mm
Type of filter	HEPA
Weight	2.2 kg
Dimensions	270 x 290 x 285 mm
Weight with packaging	2.690 kg
Packaging dimensions	280 x 315 x 280mm
Barcode	5604612715137



Metal latches



Washable HEPA particle filter



Carrying handle

### Packaging content

- > Suction hose;
- > Metal suction tube;
- > HEPA filter.

Accessories Page 128

VIBCSA20

## Blower/vacuum cleaner

20 V

**NEW**



Find out more:

VIBCPCQ20

## Glue gun 20V

**NEW**



Find out more:

### Main features:

- > Features vacuuming function;
- > Rubber tube.

### Technical data

Rated voltage	20V DC
No-load speed	18000 rpm
Speed setting levels	3
Air speed	240 Km/h
Maximum flow rate	102 m <sup>3</sup> /h
Sound power level (LWA)	93 dB
Weight	1.15 Kg
Dimensions	475 x 145 x 185 mm
Weight with packaging	1.35 kg
Packaging dimensions	185 x 173 x 283 mm
Barcode	5604612727031



3 Speed setting levels



Dust and shavings collection bag

### Packaging content

- > Dust and shavings collection bag;
- > Rubber tube.

### Main features:

- > Anti-overheating mechanism;
- > Soft grip for a more comfortable work;
- > LED battery charging status light.

### Technical data

Rated voltage	20V DC
No-load speed	12000 rpm
Glue sticks diameter	10 - 12 mm
Heating time	3 min
Weight	0.38 Kg
Dimensions	195 x 65 x 180 mm
Weight with packaging	0.55 kg
Packaging dimensions	200 x 75 x 205 mm
Barcode	5604612727024



2-finger trigger



Working temperature indicator

### Packaging content

- > Glue sticks (x3).

## ACCESSORIES FOR MACHINES WITH INTERCHANGEABLE BATTERY BATTERIES

VIBCBL202

### Lithium-ion battery 2Ah - 20V

5604612690274



Find out more:

**Features:**

- > No memory effect;
- > Charging level indicator button;
- > LED light indicates the current battery status.

VIBCBL204

### Lithium-ion battery 4Ah - 20V

5604612690281



Find out more:

**Features:**

- > No memory effect;
- > Charging level indicator button;
- > LED light indicates the current battery status.

VIBCBL206

### Lithium-ion battery 6Ah - 20V

5604612701857



Find out more:

**Features:**

- > No memory effect;
- > Charging level indicator button;
- > LED light indicates the current battery status.

## CHARGERS

VIBCCR20

### Fast battery charger

5604612690298



Find out more:

**Features:**

- > Charging level indicator button;
- > LED light indicates the current battery status;
- > 1.9 m power cord.

VIBCCDR20

### Fast battery charger - dual

5604612702069



Find out more:

**Features:**

- > Charging level indicator button;
- > LED light indicates the current battery status;
- > 1.9 m power cord.

## ACCESSORIES FOR MACHINES WITH INTERCHANGEABLE BATTERY BOXES

VIBCBCBA

### BMC case for cordless combi drill/ screwdriver



**Features:**

- > Metal latches;
- > Storage;
- > Customised fitting.



Find out more:

**Dimensions**

315 x 335 x 100 mm

**Ean**

5604612710958

**Possibility of storage for:**

Machines: VIBCBSFL20 or VIBCASFL20

Batteries: VIBCBL202 or VIBCBL204

Charger: VIBCCR20

VIBCBMCR

### BMC case for angle grinder



**Features:**

- > Metal latches;
- > Storage;
- > Customised fitting.



Find out more:

**Dimensions**

425 x 335 x 135 mm

**Ean**

5604612710965

**Possibility of storage for:**

Machines: VIBCRSFL20 or VIBCRBSFL20 or VIBCRBSFL20A

Batteries: VIBCBL202 or VIBCBL204

Charger: VIBCCR20

VIBCBCMP

### BMC case for rotary hammer



**Features:**

- > Metal latches;
- > Storage;
- > Customised fitting.



Find out more:

**Dimensions**

390 x 345 x 115 mm

**Ean**

5604612710972

**Possibility of storage for:**

Machines: VIBCMPSFL20A

Batteries: VIBCBL202 or VIBCBL204

Charger: VIBCCR20

VIBCBCBBA

### BMC case for brushless combi drill/impact wrench



**Features:**

- > Metal latches;
- > Storage;
- > Customised fitting.



Find out more:

**Dimensions**

340 x 345 x 110 mm

**Ean**

5604612712600

**Possibility of storage for:**

Machines: VIBCBBSFL20 or VIBCAIBSFL20

Batteries: VIBCBL202 or VIBCBL204

Charger: VIBCCR20

# POWER TOOLS



VIMSFL4

## Cordless multi-tool 4V



Find out more:



### Main features:

- > Lithium-ion battery without memory effect;
- > Reverse rotation;
- > Magnetic tool holder;
- > Micro USB connector.

### Technical data


Rated voltage	4,0 V DC
Battery capacity	1.5 Ah
Battery charging time	2 - 3 hours
Speeds	-
No-load speed	0 - 200 rpm
Maximum torque	4 Nm
Drive	Hexagonal
Felt cutting capacity	6 mm
Cardboard cutting capacity	3.4 mm
Corrugated board cutting capacity	5 mm
Sound power level (LWA)	77 dB(A)
Weight	0.38 Kg
Dimensions	130 x 35 x 115 mm
Weight with packaging	1.36 Kg
Packaging dimensions	270 x 70 x 150 mm
Barcode	5604612704155



LED light for work surface illumination



LED battery charge status lights



Included accessories

### Packaging content

- > Battery charger;
- > Angle adapter;
- > Eccentric head;
- > Chuck collet adapter;
- > Cutting adapter;
- > Bits 25 mm (x26);
- > Bits 50 mm (x2);
- > Magnetic bit holder.



VIASFL12

## Cordless screwdriver 12V



Find out more:



### Main features:

- > Lithium-ion battery without memory effect;
- > Variable speed and reverse rotation;
- > Quick-stop function;
- > Metal drill chuck with spindle lock.

### Technical data

Rated voltage	12 V DC
Battery capacity	2 Ah
Battery charging time	1 hour
Speeds	2
No-load speed - 1st speed	0 - 350 rpm
No-load speed - 2nd speed	0 - 1100 rpm
Maximum torque	23.8 Nm
Torque setting positions	20 + 1
Drill chuck capacity	10 mm
Steel drilling	10 mm
Wood drilling	26 mm
Sound power level (LWA)	87 dB(A)
Weight	0.93 Kg
Dimensions	180 x 50 x 185 mm
Weight with packaging	2.11 Kg
Packaging dimensions	320 x 90 x 225 mm
Barcode	5604612678470



LED light for work surface illumination



LED battery charge status lights



2 batteries included

### Packaging content

- > 2.0 Ah batteries (x2);
- > Battery charger;
- > Bits (x6);
- > Magnetic bit holder.



Accessories Page 130, 131, 134 to 136, 138, 139



VIBSFL144A

## Cordless combi drill 14.4V



Find out more:

VIBSFL18

## Brushless cordless percussion combi drill 18V



Find out more:

### Main features:

- > Lithium-ion battery without memory effect;
- > Variable speed and reverse rotation;
- > Quick-stop function;
- > Metal drill chuck with spindle lock.

### Technical data

Rated voltage	14,4 V
Battery capacity	2 Ah
Battery charging time	1 hour
Speeds	2
No-load speed - 1st speed	0 - 400 rpm
No-load speed - 2nd speed	0 - 1300 rpm
Maximum torque	40 Nm
Torque setting positions	19 + 1
Drill chuck capacity	10 mm
Steel drilling	10 mm
Wood drilling	20 mm
Sound power level (LWA)	81 dB(A)
Weight	1.16 Kg
Dimensions	180 x 75 x 220 mm
Weight with packaging	2.64 Kg
Packaging dimensions	110 x 290 x 270 mm
Barcode	5604612678487

### Main features:

- > Lithium-ion battery without memory effect;
- > Variable speed and reverse rotation;
- > Quick-stop function;
- > Metal drill chuck with spindle lock;
- > Impact drilling (hammer function).

### Technical data

Rated voltage	18 V
Battery capacity	2 Ah
Battery charging time	1 hour
Speeds	2
No-load speed - 1st speed	0 - 400 rpm
No-load speed - 2nd speed	0 - 1550 rpm
Impact frequency - 1st speed	0 - 6000 ipm
Impact frequency - 2nd speed	0 - 22500 ipm
Maximum torque	56 Nm
Torque setting positions	25 + 1 + 1
Drill chuck capacity	13 mm
Steel drilling	13 mm
Concrete drilling	10 mm
Wood drilling	30 mm
Sound power level (LWA)	81 dB(A)
Weight	1.69 Kg
Dimensions	225 x 75 x 230 mm
Weight with packaging	3.48 Kg
Packaging dimensions	300 x 100 x 305 mm
Barcode	5604612678494



LED light for work surface illumination



LED battery charge status lights



2 batteries included



LED light for work surface illumination



LED battery charge status lights



2 batteries included

### Packaging content

- > 2.0 Ah batteries (x2);
- > Battery charger;
- > Bits (x6);
- > Drill bits (x6);
- > Magnetic bit holder;
- > Reversible belt clip.



### Packaging content

- > 2.0 Ah batteries (x2);
- > Battery charger;
- > Bits (x8);
- > Drill bits (x8);
- > Magnetic bit holder;
- > Reversible belt clip.



**BATTERY 18V LI 2AH**  
VIBSFL182BAT  
5604612712877

Accessories Page 130, 131, 134 to 136, 138, 139

Accessories Page 130, 131, 134 to 136, 138, 139



VIBBSFL20

## Cordless percussion combi drill

20V - 2Ah



Find out more:



VIBBSFL204

## Cordless percussion combi drill

20V - 4Ah

NEW



Find out more:



### Main features:

- > Brushless motor;
- > Lithium-ion battery without memory effect;
- > Variable speed and reverse rotation;
- > Quick-stop function;
- > Metal drill chuck with spindle lock;
- > Impact drilling (hammer function).

### Technical data

Rated voltage	20 V DC
Battery capacity	2 Ah
Battery charging time	1 hour
Speeds	2
No-load speed - 1st speed	0 - 550 rpm
No-load speed - 2nd speed	0 - 2000 rpm
Impact frequency - 1st speed	0 - 9000 ipm
Impact frequency - 2nd speed	0 - 30000 ipm
Maximum torque	46 Nm
Torque setting positions	25 + 1 + 1
Drill chuck capacity	13 mm
Steel drilling	13 mm
Wood drilling	30 mm
Concrete drilling	10 mm
Sound power level (LWA)	89 dB(A)
Weight	1.77 Kg
Dimensions	220 x 85 x 235 mm
Weight with packaging	3.5 Kg
Packaging dimensions	332 x 103 x 306 mm
Barcode	5604612704162



LED light for work surface illumination



LED battery charge status lights



2 batteries included

### Packaging content

- > 2.0 Ah batteries (x2);
- > Battery charger;
- > Bits (x8);
- > Drill bits (x8);
- > Magnetic bit holder;
- > Reversible belt clip.



**BATTERY 20V LI 2 AH**  
VIBBSFL202BAT  
5604612712860

Accessories Page 130, 131, 134 to 136, 138, 139

### Main features:


- > Brushless motor;
- > Lithium-ion battery without memory effect;
- > Variable speed and reverse rotation;
- > Quick-stop function;
- > Metal drill chuck with spindle lock;
- > Impact drilling (hammer function).

### Technical data

Rated voltage	20 V DC
Battery capacity	4 Ah
Battery charging time	1 hour
Speeds	2
No-load speed - 1st speed	0 - 550 rpm
No-load speed - 2nd speed	0 - 2000 rpm
Impact frequency - 1st speed	0 - 9000 ipm
Impact frequency - 2nd speed	0 - 30000 ipm
Maximum torque	46 Nm
Torque setting positions	25 + 1 + 1
Drill chuck capacity	13 mm
Steel drilling	13 mm
Wood drilling	30 mm
Concrete drilling	10 mm
Sound power level (LWA)	89 dB(A)
Weight	2.04 Kg
Dimensions	220 x 85 x 255 mm
Weight with packaging	4.40 kg
Packaging dimensions	335 x 305 x 105 mm
Barcode	5604612711191



LED light for work surface illumination



LED battery charge status lights



2 batteries included

### Packaging content

- > 4.0 Ah batteries (x2);
- > Battery charger;
- > Bits (x8);
- > Drill bits (x8);
- > Magnetic bit holder;
- > Reversible belt clip.



**BATTERY 20V LI 4 AH**  
VIBBSFL204BAT  
5604612712853

Accessories Page 130, 131, 134 to 136, 138, 139

VIBE600

**Percussion drill**  
600W



Find out more:

VIBE850

**Percussion drill**  
850W



Find out more:

**Main features:**

- > Variable speed and reverse rotation;
- > ON/OFF switch lock-on button;
- > Metal drill chuck with spindle lock;
- > Impact drilling (hammer function).

**Technical data**

Rated power	600 W
Mains voltage	230 V - 50 Hz
Speeds	-
No-load speed	0 - 3100 rpm
Impact frequency	0 - 46500 ipm
Drill chuck capacity	13 mm
Steel drilling	10 mm
Concrete drilling	13 mm
Wood drilling	25 mm
Functions	2
Sound power level (LWA)	103 dB(A)
Weight	1.75 Kg
Dimensions	290 x 65 x 195 mm
Weight with packaging	2.12 Kg
Packaging dimensions	310 x 65 x 240 mm
Barcode	5604612684815

**Main features:**

- > Variable speed and reverse rotation;
- > ON/OFF switch lock-on button;
- > Metal drill chuck with spindle lock;
- > Impact drilling (hammer function).

**Technical data**

Rated power	850 W
Mains voltage	230 V - 50 Hz
Speeds	-
No-load speed	0 - 3000 rpm
Impact frequency	0 - 45000 ipm
Drill chuck capacity	13 mm
Steel drilling	13 mm
Concrete drilling	20 mm
Wood drilling	30 mm
Functions	2
Sound power level (LWA)	105 dB(A)
Weight	2.05 Kg
Dimensions	300 x 75 x 195 mm
Weight with packaging	2.45 Kg
Packaging dimensions	320 x 70 x 240 mm
Barcode	5604612680695



Handle with tool holder



Percussion mode selector



Rotation to the right and left



Handle with tool holder



Percussion mode selector



Rotation to the right and left

**Packaging content**

- > Auxiliary handle;
- > Depth stop;
- > Replacement pair of carbon brushes.

Accessories Page 130, 131, 134 to 136, 138, 139

**Packaging content**

- > Auxiliary handle;
- > Depth stop;
- > Replacement pair of carbon brushes.

Accessories Page 130, 131, 134 to 136, 138, 139

VIBE1050A

## Percussion drill 1050W



Find out more:



### Main features:

- > Metal gearbox;
- > Variable speed and reverse rotation;
- > ON/OFF switch lock-on button;
- > Metal drill chuck with spindle lock;
- > Impact drilling (hammer function).

### Technical data

Rated power	1050 W
Mains voltage	230 V - 50 Hz
Speeds	2
No-load speed - 1st speed	0 - 1000 rpm
No-load speed - 2nd speed	0 - 2800 rpm
Impact frequency	0 - 44800 ipm
Drill chuck capacity	13 mm
Steel drilling	13 mm
Concrete drilling	20 mm
Wood drilling	30 mm
Functions	2
Sound power level (LWA)	105 dB(A)
Weight	3.12 Kg
Dimensions	370 x 85 x 260 mm
Weight with packaging	4.42 Kg
Packaging dimensions	410 x 110 x 310 mm
Barcode	5604612703868



Percussion mode selector



Rotation to the right and left



Speed dial

### Packaging content

- > Auxiliary handle;
- > Depth stop;
- > Drill chuck key;
- > Replacement pair of carbon brushes.

Accessories Page 130, 131, 134 to 136, 138, 139

VIMPDP850

## Rotary hammer 850W

**NEW**


Find out more:



### Main features:

- > Chisel position adjustment;
- > Variable speed;
- > Reverse rotation;
- > ON/OFF switch lock-on button;
- > Safety clutch mechanism.

### Technical data


Rated power	850 W
Mains voltage	230 V - 50 Hz
Impact energy	3.5 J
No-load speed	0 - 1100 rpm
Impact frequency	0 - 5000 ipm
Drill chuck capacity	12 mm
Concrete drilling	26 mm
Drill chuck	SDS-Plus
Functions	4
Sound power level (LWA)	104 dB(A)
Sound pressure level	93 dB
Weight	3.50 Kg
Dimensions	370 x 95 x 225 mm
Weight with packaging	6.60 Kg
Packaging dimensions	385 x 110 x 300 mm
Barcode	5604612726584



Mode selector switch



Rotation to the right and left



Included accessories

### Packaging content

- > Pointed chisel;
- > Flat chisel;
- > Drill bits (x3);
- > Auxiliary handle;
- > Dust collector.



Accessories Page 137

VIMPDP1250

## Rotary hammer 1250W

**NEW**



Find out more:

VIMPDP1500

## Rotary hammer 1500W

**NEW**



Find out more:

### Main features:

- > Metal gearbox;
- > Chisel position adjustment;
- > Variable speed;
- > Safety clutch mechanism.

### Technical data

Rated power	1250 W
Mains voltage	230 V - 50 Hz
Impact energy	5 J
No-load speed	0 - 850 rpm
Impact frequency	0 - 4500 ipm
Drill chuck capacity	12 mm
Concrete drilling	30 mm
Drill chuck	SDS-Plus
Functions	4
Sound power level (LWA)	101 dB(A)
Weight	4.80 Kg
Dimensions	360 x 245 x 115 mm
Weight with packaging	8.10 Kg
Packaging dimensions	410 x 330 x 120 mm
Barcode	5604612726591

### Main features:

- > Metal gearbox;
- > Chisel position adjustment;
- > Variable speed;
- > Safety clutch mechanism.

### Technical data

Rated power	1500 W
Mains voltage	230 V - 50 Hz
Impact energy	6 J
No-load speed	0 - 850 rpm
Impact frequency	0 - 4500 ipm
Drill chuck capacity	12 mm
Concrete drilling	32 mm
Drill chuck	SDS-Plus
Functions	4
Sound power level (LWA)	101 dB(A)
Weight	5.40 Kg
Dimensions	360 x 245 x 115 mm
Weight with packaging	9.00 Kg
Packaging dimensions	410 x 330 x 120 mm
Barcode	5604612726607



Vibration reduction system



Easy access for greasing



Included

### Packaging content

- > Pointed chisel;
- > Flat chisel;
- > Drill bits (x3);
- > Auxiliary handle;
- > Dust collector;
- > Grease tube.



Accessories Page 137



Vibration reduction system



Easy access for greasing



Included

### Packaging content

- > Pointed chisel;
- > Flat chisel;
- > Drill bits (x3);
- > Auxiliary handle;
- > Dust collector;
- > Grease tube.



Accessories Page 137

VIMP1050P

## Rotary hammer 1050W



Find out more:

VIMP1100

## Rotary hammer 1100W



Find out more:

### Main features:

- > Metal body;
- > Chisel position adjustment;
- > Safety clutch mechanism.

### Technical data

Rated power	1050 W
Mains voltage	230 V - 50 Hz
Impact energy	9 J
No-load speed	0 - 480 rpm
Impact frequency	0 - 3780 ipm
Drill bit maximum diameter	13 mm
Core drill bit maximum diameter	55 mm
Concrete drilling diameter	26 mm
Drill chuck	SDS-Max
Functions	2
Chisel positions	-
Sound power level (LWA) - drilling	105 dB(A)
Sound power level (LWA) - chiselling	107 dB(A)
Weight	6.44 Kg
Dimensions	410 x 105 x 270 mm
Weight with packaging	11.40 Kg
Packaging dimensions	445 x 140 x 375 mm
Barcode	5604612643942



Vibration reduction system



Included

### Packaging content

- > Flat chisel;
- > Pointed chisel;
- > Drill bits (x3);
- > Auxiliary handle;
- > Grease tube;
- > Dust collector;
- > Replacement pair of carbon brushes.



Accessories Page 137

### Main features:


- > Chisel position adjustment;
- > Variable speed;
- > Safety clutch mechanism.

### Technical data

Rated power	1100 W
Mains voltage	230 V - 50 Hz
Impact energy	1 - 7 J
No-load speed	300 - 760 rpm
Impact frequency	1950 - 4680 ipm
Drill bit maximum diameter	35 mm
Core drill bit maximum diameter	90 mm
Concrete drilling diameter	16 - 28 mm
Drill chuck	SDS-Max
Functions	2
Chisel positions	-
Sound power level (LWA) - drilling	102 dB(A)
Sound power level (LWA) - chiselling	111 dB(A)
Weight	6.31 Kg
Dimensions	445 x 100 x 265 mm
Weight with packaging	9.2 Kg
Packaging dimensions	495 x 140 x 380 mm
Barcode	5604612692070



LED light for carbon brushes and power supply status



Vibration reduction system



Speed control button

### Packaging content

- > Auxiliary handle;
- > Depth stop;
- > Grease tube;
- > Replacement pair of carbon brushes.



Accessories Page 137





VIMP1200

## Rotary hammer 1200W



Find out more:

VIMP1500

## Rotary hammer 1500W



Find out more:

### Main features:

- > Chisel position adjustment;
- > Variable speed;
- > Safety clutch mechanism.

### Technical data

Rated power	1200 W
Mains voltage	230 V - 50 Hz
Impact energy	2 - 10 J
No-load speed	235 - 514 rpm
Impact frequency	1350 - 2950 ipm
Drill bit maximum diameter	42 mm
Core drill bit maximum diameter	110 mm
Concrete drilling diameter	18 - 30 mm
Drill chuck	SDS-Max
Functions	2
Chisel positions	12
Sound power level (LWA) - drilling	99 dB(A)
Sound power level (LWA) - chiselling	106 dB(A)
Weight	6.60 Kg
Dimensions	480 x 110 x 260 mm
Weight with packaging	10.10 Kg
Packaging dimensions	595 x 160 x 430 mm
Barcode	5604612686987



LED light for carbon brushes and power supply status



Vibration reduction system



Speed control button

### Packaging content

- > Auxiliary handle;
- > Depth stop;
- > Grease tube;
- > Replacement pair of carbon brushes.



Accessories Page 137

### Main features:

- > Chisel position adjustment;
- > Variable speed;
- > Continuous operation - hammer mode;
- > Safety clutch mechanism.

### Technical data

Rated power	1500 W
Mains voltage	230 V - 50 Hz
Impact energy	2 - 15 J
No-load speed	150 - 305 rpm
Impact frequency	1380 - 2760 ipm
Drill bit maximum diameter	52 mm
Core drill bit maximum diameter	160 mm
Concrete drilling diameter	25 - 45 mm
Drill chuck	SDS-Max
Functions	2
Chisel positions	12
Sound power level (LWA) - drilling	98 dB(A)
Sound power level (LWA) - chiselling	109 dB(A)
Weight	9.15 Kg
Dimensions	560 x 110 x 280 mm
Weight with packaging	13.40 Kg
Packaging dimensions	595 x 160 x 430 mm
Barcode	5604612686994



LED light for carbon brushes and power supply status



Vibration reduction system



Speed control button

### Packaging content

- > Auxiliary handle;
- > Grease tube;
- > Replacement pair of carbon brushes.



Accessories Page 137

VIMD1500

## Demolition hammer 1500W - 25J



Find out more:

VIMD1700

## Demolition hammer 1700W - 50J



Find out more:

### Main features:

- > Chisel position adjustment;
- > Variable speed;
- > ON/OFF switch lock-on button.

### Technical data

Rated power	1500 W
Mains voltage	230 V - 50 Hz
Impact energy	6 - 25 J
No-load speed	-
Impact frequency	1000 - 1900 ipm
Drill chuck	SDS-Max
Chisel positions	12
Sound power level (LWA) - chiselling	103 dB(A)
Weight	10.35 Kg
Dimensions	590 x 110 x 275 mm
Weight with packaging	16.31 Kg
Packaging dimensions	640 x 170 x 390 mm
Barcode	5604612687007



LED light for carbon brushes status



Vibration reduction system



Included accessories

### Packaging content

- > Flat chisel SDS-Max 18 x 350 mm;
- > Pointed chisel SDS-Max 350 mm;
- > Auxiliary handle;
- > Grease tube;
- > Replacement pair of carbon brushes.



Accessories Page 137

### Main features:

- > Aluminium body.

### Technical data


Rated power	1700 W
Mains voltage	230 V - 50 Hz
Impact energy	50 J
No-load speed	-
Impact frequency	0 - 2000 ipm
Drill chuck	SDS-Hex 30 mm
Chisel positions	-
Sound power level (LWA) - chiselling	105 dB(A)
Weight	13.70 Kg
Dimensions	700 x 120 x 260 mm
Weight with packaging	21.31 Kg
Packaging dimensions	740 x 150 x 370 mm
Barcode	5604612672058



Dual vibration reduction system



Oil level indicator



Included accessories

### Packaging content

- > Flat chisel SDS-Hex 18 x 390 mm;
- > Pointed chisel SDS-Hex 390 mm;
- > Auxiliary handle;
- > Oil bottle;
- > Replacement pair of carbon brushes.



Accessories Page 137



## Overview

### Rotary hammers



Technical data	VIMPDP850	VIMPDP1250	VIMPDP1500	VIMP1050P
Rated power	850 W	1250 W	1500 W	1050 W
Impact energy	3,5 J	5 J	6 J	8 J
No-load speed	0 - 1100 rpm	0 - 850 rpm	0 - 850 rpm	0 - 480 rpm
Impact frequency	0 - 5000 ipm	0 - 4500 ipm	0 - 4500 ipm	0 - 3780 ipm
Drill bit maximum diameter	12 mm Steel	12 mm Steel	12 mm Steel	12 mm Steel
Core drill bit maximum diameter	-	-	-	55 mm
Concrete drilling diameter	26 mm	30 mm	32 mm	38 mm
Drill chuck	SDS-Plus	SDS-Plus	SDS-Plus	SDS-Max
Functions	4	4	4	2
Chisel positions	-	-	-	-
Type of motor	Carbon brushes	Carbon brushes	Carbon brushes	Carbon brushes
Mains voltage	230 V - 50 Hz	230 V - 50 Hz	230 V - 50 Hz	230 V - 50 Hz
Power cord length	2 metres	2 metres	2 metres	2 metres
Chisel position adjustment	✓	✓	✓	✓
Variable speed	✓	✓	-	✓
Reversible direction of rotation	✓	✓	-	-
ON/OFF switch lock-on button	✓	✓	-	-
Continuous operation - hammer mode	-	-	-	-
LED light for carbon brushes status	✓	✓	-	✓
LED power supply status light	✓	✓	-	✓
Vibration reduction system	-	-	✓	✓
Safety clutch mechanism	✓	✓	✓	✓
Carrying case	BMC	BMC	BMC	BMC
Insulation class	II	II	II	II
Sound power level (LWA) - drilling	-	-	-	105 dB(A)
Sound power level (LWA) - chiselling	104 dB(A)	101 dB(A)	101 dB(A)	107 dB(A)
Sound pressure level (LpA) - drilling	-	-	-	94 dB(A)
Sound pressure level (LpA) - chiselling	93 dB(A)	90 dB(A)	90 dB(A)	96 dB(A)
Weight	6.20 Kg	7.65 Kg	8.55 Kg	6.44 Kg
Dimensions	370 x 95 x 225 mm	360 x 245 x 115 mm	360 x 245 x 115 mm	410 x 105 x 270 mm
Weight with packaging	6.60 Kg	8.10 Kg	9.00 Kg	11.40 Kg
Packaging dimensions	385 x 110 x 300 mm	410 x 330 x 120 mm	410 x 330 x 120 mm	445 x 140 x 375 mm

#### Packaging content

Flat chisel	✓	✓	✓	✓
Pointed chisel	✓	✓	✓	✓
Drill bits	✓	✓	✓	✓
Auxiliary grip/handle	✓	✓	✓	✓
Depth stop	✓	✓	✓	-
Grease tube	-	✓	✓	✓
Dust collector	✓	✓	✓	✓
Replacement pair of carbon brushes	✓	✓	✓	✓
Oil bottle	-	-	-	-



VIMP1100	VIMP1200	VIMP1500	VIMD1500	VIMD1700
1100 W	1200 W	1500 W	1500 W	1700 W
1 - 7 J	2 - 10 J	2 - 15 J	6 - 25 J	50 J
300 - 760 rpm	235 - 514 rpm	150 - 305 rpm	-	-
1950 - 4680 ipm	1350 - 2950 ipm	1380 - 2760 ipm	1000 - 1900 ipm	0 - 2000 ipm
35 mm	42 mm	52 mm	-	-
90 mm	110 mm	160 mm	-	-
16 - 28 mm	18 - 30 mm	25 - 45 mm	-	-
SDS-Max	SDS-Max	SDS-Max	SDS-Max	SDS-Hex 30 mm
2	2	2	-	-
-	12	12	12	-
Carbon brushes	Carbon brushes	Carbon brushes	Carbon brushes	Carbon brushes
230 V - 50 Hz	230 V - 50 Hz	230 V - 50 Hz	230 V - 50 Hz	230 V - 50 Hz
4 metres	4 metres	4 metres	4 metres	3 metres
✓	✓	✓	✓	-
✓	✓	✓	✓	-
-	-	-	-	-
-	-	-	✓	-
-	-	✓	-	-
✓	✓	✓	✓	-
✓	✓	✓	-	-
✓	✓	✓	✓	Dual
✓	✓	✓	-	-
BMC	BMC	BMC	BMC	BMC
II	II	II	II	II
102 dB(A)	99 dB(A)	98 dB(A)	-	-
111 dB(A)	106 dB(A)	109 dB(A)	103 dB(A)	104 dB(A)
91 dB(A)	88 dB(A)	87 dB(A)	-	-
100 dB(A)	95 dB(A)	98 dB(A)	92 dB(A)	99 dB(A)
6.31 Kg	6.60 Kg	9.15 Kg	10.35 Kg	13.70 Kg
445 x 100 x 265mm	480 x 110 x 260 mm	560 x 110 x 280 mm	590 x 110 x 275mm	700 x 120 x 260 mm
9.2 Kg	10.10 Kg	13.40 Kg	16.31 Kg	21.31 Kg
495 x 140 x 380 mm	595 x 160 x 430 mm	595 x 160 x 430 mm	640 x 170 x 390 mm	740 x 150 x 370 mm
-	-	-	✓	✓
-	-	-	✓	✓
-	-	-	-	-
✓	✓	✓	✓	✓
✓	✓	-	-	-
✓	✓	✓	✓	-
-	-	-	-	-
✓	✓	✓	✓	✓
-	-	-	-	✓

VIRE11571

**Angle grinder**  
710W - 115mm

**RAD**



Find out more:

VIRE11585A

**Angle grinder**  
850W - 115mm

**RAD**



Find out more:

**Main features:**

- > Restart protection;
- > Spindle lock;
- > Adjustable disc guard;
- > ON/OFF switch lock-on button;
- > Metal gearbox.

**Technical data**

Rated power	710 W
Mains voltage	230 V - 50 Hz
No-load speed	11000 rpm
Disc outer diameter	115 mm
Disc inner diameter	22 mm
Spindle thread	M14
Auxiliary handle	2
Power cord length	2 metres
Sound power level (LWA)	95 dB(A)
Weight	1.89 Kg
Dimensions	320 x 225 x 105 mm
Weight with packaging	2.25 Kg
Packaging dimensions	325 x 125 x 120 mm
Barcode	5604612707576

**Main features:**

- > Restart protection;
- > Spindle lock;
- > Adjustable disc guard;
- > ON/OFF switch lock-on button;
- > Metal gearbox.

**Technical data**

Rated power	850 W
Mains voltage	230 V - 50 Hz
No-load speed	11000 rpm
Disc outer diameter	115 mm
Disc inner diameter	22 mm
Spindle thread	M14
Auxiliary handle	2
Power cord length	2 metres
Sound power level (LWA)	100 dB(A)
Weight	1.96 Kg
Dimensions	330 x 225 x 105 mm
Weight with packaging	2.30 Kg
Packaging dimensions	325 x 125 x 120 mm
Barcode	5604612707569




ON/OFF switch locking



2-position auxiliary handle



ON/OFF switch locking



2-position auxiliary handle

**Packaging content**

- > Auxiliary handle;
- > Pin spanner;
- > Replacement pair of carbon brushes;
- > Disc guard;
- > Disc guard fixing screw;
- > Outer locking flange;
- > Inner locking flange.

Accessories Page 140 to 143, 145

**Packaging content**

- > Auxiliary handle;
- > Pin spanner;
- > Replacement pair of carbon brushes;
- > Disc guard;
- > Disc guard fixing screw;
- > Outer locking flange;
- > Inner locking flange.

Accessories Page 140 to 143, 145

VIRE12510A

## Angle grinder

### 1000W - 125mm

RAD



Find out more:

#### Main features:

- > Restart protection;
- > Spindle lock;
- > Adjustable disc guard;
- > Safety button;
- > Metal gearbox.

#### Technical data

Rated power	1000 W
Mains voltage	230 V - 50 Hz
No-load speed	11500 rpm
Disc outer diameter	125 mm
Disc inner diameter	22 mm
Spindle thread	M14
Auxiliary handle positions	2
Power cord length	2 metres
Sound power level (LWA)	100 dB(A)
Weight	2.14 Kg
Dimensions	400 x 235 x 105 mm
Weight with packaging	2.50 Kg
Packaging dimensions	410 x 130 x 120 mm
Barcode	5604612707590



Safety  
button



2-position  
auxiliary handle

#### Packaging content

- > Auxiliary handle;
- > Pin spanner;
- > Replacement pair of carbon brushes;
- > Disc guard;
- > Disc guard fixing screw;
- > Outer locking flange;
- > Inner locking flange.

Accessories Page 140 to 143, 145

VIRE23022A

## Angle grinder

### 2200W - 230mm

RAD



Find out more:

#### Main features:

- > Restart protection;
- > Spindle lock;
- > Adjustable disc guard;
- > ON/OFF switch lock-on button;
- > Metal gearbox.

#### Technical data

Rated power	2200 W
Mains voltage	230 V - 50 Hz
No-load speed	6000 rpm
Disc outer diameter	230 mm
Disc inner diameter	22 mm
Spindle thread	M14
Auxiliary handle positions	3
Main handle positions	5
Power cord length	4 metres
Sound power level (LWA)	104 dB(A)
Weight	5.65 Kg
Dimensions	535 x 310 x 140 mm
Weight with packaging	6.50 Kg
Packaging dimensions	540 x 140 x 170 mm
Barcode	5604612707606



ON/OFF switch  
locking



3-position  
auxiliary handle



5-position  
adjustable main handle

#### Packaging content

- > Auxiliary handle;
- > Pin spanner;
- > Replacement pair of carbon brushes;
- > Disc guard;
- > Disc guard fixing screw;
- > Outer locking flange;
- > Inner locking flange.

Accessories Page 140 to 143, 145





VIRE11510

## Angle grinder

### 1000W - 115mm

RADPRO



Find out more:

VIRE23026

## Angle grinder

### 2600W - 230mm

RADPRO



Find out more:

#### Main features:


- > Restart protection;
- > Spindle lock;
- > Adjustable disc guard;
- > ON/OFF switch lock-on button;
- > Metal gearbox.

#### Technical data

Rated power	1000 W
Mains voltage	230 V - 50 Hz
No-load speed	11000 rpm
Disc outer diameter	115 mm
Disc inner diameter	22 mm
Spindle thread	M14
Auxiliary handle positions	2
Power cord length	2 metres
Sound power level (LWA)	103 dB(A)
Weight	2.03 Kg
Dimensions	330 x 230 x 110 mm
Weight with packaging	2.37 Kg
Packaging dimensions	325 x 125 x 120 mm
Barcode	5604612707583



ON/OFF switch locking



2-position auxiliary handle

#### Packaging content

- > Auxiliary handle;
- > Pin spanner;
- > Replacement pair of carbon brushes;
- > Disc guard;
- > Disc guard fixing screw;
- > Outer locking flange;
- > Inner locking flange.

Accessories Page 140 to 143, 145

#### Main features:

- > Restart protection;
- > Spindle lock;
- > Adjustable disc guard;
- > ON/OFF switch lock-on button;
- > Metal gearbox.

#### Technical data

Rated power	2600 W
Mains voltage	230 V - 50 Hz
No-load speed	6500 rpm
Disc outer diameter	230 mm
Disc inner diameter	22 mm
Spindle thread	M14
Auxiliary handle positions	3
Power cord length	4 metres
Sound power level (LWA)	109 dB(A)
Weight	6.15 Kg
Dimensions	560 x 310 x 140 mm
Weight with packaging	7 Kg
Packaging dimensions	540 x 140 x 170 mm
Barcode	5604612707613



ON/OFF switch locking



3-position auxiliary handle

#### Packaging content

- > Auxiliary handle;
- > Pin spanner;
- > Replacement pair of carbon brushes;
- > Disc guard;
- > Disc guard fixing screw;
- > Outer locking flange;
- > Inner locking flange.

Accessories Page 140 to 143, 145

VIMAR2400

## Wall chaser 2400W - 150mm

**NEW**



Find out more:

VISCCC15110

## Circular tile saw 1550W - 110mm

**NEW**



Find out more:

### Main features:

- > Metal gearbox body;
- > Stabilising bearings;
- > Safety switch.

### Technical data

Rated power	2400 W
Mains voltage	230 V - 50 Hz
No-load speed	8000 rpm
Blade diameter	150 mm
Bore diameter diameter	22 mm
Maximum cutting width	28 mm
Sound power level (LWA)	108 dB
Power cord length	2 m
Weight	7.14 Kg
Dimensions	480 x 215 x 175 mm
Weight with packaging	8.20 Kg
Packaging dimensions	500 x 230 x 190 mm
Barcode	5604612727130

### Main features:

- > Water cooling of the blade;
- > Metal gearbox body;
- > Quick adjustment of the cutting depth;
- > Blade guard;
- > On/Off switch protected against dust penetration.

### Technical data

Rated power	1550 W
Mains voltage	230 V - 50 Hz
No-load speed	12000 rpm
Blade diameter	110 mm
Bore diameter diameter	20 mm
Maximum cutting depth	34
Sound power level (LWA)	102
Insulation class	II
Weight	3.5 Kg
Dimensions	210 x 210 x 200 mm
Weight with packaging	3.90 Kg
Packaging dimensions	240 x 230 x 180 mm
Barcode	5604612726133



Cutting depth adjustment



Different cutting widths



Dust suction port



Cutting depth adjustment



Water cooling of the blade



Easy carbon brushes change

### Packaging content

- > Triple-layered blade;
- > 5 washers;
- > 1 handle;
- > 2 keys;
- > 1 dust collection bag;
- > 1 suction hose.



### Packaging content

- > Blade for ceramic cutting 110mm;
- > Blade locking hex key;
- > Blade bolt;
- > Replacement pair of carbon brushes.

Accessories Page 140 to 143, 145



VISCF355

## Metal cut-off saw 2300W - 355mm



Find out more:



### Main features:

- > Cutting depth limiting screw;
- > Quick feet fixing.



Adjustable  
cutting angle



Cutting depth  
limiting screw

### Packaging content

- > Blade for metal cutting 355 mm;
- > Replacement pair of carbon brushes.

Accessories Page 142

### Technical data

Rated power	2300 W
Mains voltage	230 V - 50 Hz
No-load speed	4000 rpm
Blade diameter	355 mm
Bore diameter	25 mm
Cutting angle	0 - 45°
Maximum cutting depth	
Cutting at round profile (0°)	130 mm
Cutting at round profile (45°)	130 mm
Cutting at square profile (0°)	120 mm
Cutting at square profile (45°)	105 mm
Cutting at rectangular profile (0°)	120 x 130 mm
Cutting at rectangular profile (45°)	120 x 105 mm
Sound power level (LWA)	105 dB(A)
Weight	16.5 Kg
Dimensions	550 x 290 x 550 mm
Weight with packaging	18.90 Kg
Packaging dimensions	740 x 330 x 440 mm
Barcode	5604612676049

VIES150B

**Bench grinder**  
250W - 150mm



Find out more:

VIES200A

**Bench grinder**  
450W - 200mm



Find out more:

**Main features:**

- > Four rubber feet for greater stability;
- > On/Off switch protected against dust penetration.

**Technical data**

Rated power	250 W
Mains voltage	230 V - 50 Hz
No-load speed	2950 rpm
Grinding wheel outer diameter	150 mm
Grinding wheel inner diameter	12.7 mm
Grinding wheel thickness	20 mm
Type of grit	G36/G60
Duty cycle	S2 (30 min)
Sound power level (LWA)	92 dB(A)
Weight	6.8 Kg
Dimensions	320 x 200 x 225 mm
Weight with packaging	7 Kg
Packaging dimensions	361 x 202 x 250 mm
Barcode	5604612708559

**Main features:**

- > Four rubber feet for greater stability;
- > On/Off switch protected against dust penetration.

**Technical data**

Rated power	450 W
Mains voltage	230 V - 50 Hz
No-load speed	2950 rpm
Grinding wheel outer diameter	200 mm
Grinding wheel inner diameter	12.7 mm
Grinding wheel thickness	20 mm
Type of grit	G36/G60
Duty cycle	S2 (30 min)
Sound power level (LWA)	92 dB(A)
Weight	9.8 Kg
Dimensions	385 x 250 x 255 mm
Weight with packaging	10 Kg
Packaging dimensions	425x 265 x 280 mm
Barcode	5604612708566



Adjustable tool rests



Adjustable eye shields

**Packaging content**

- > Grinding wheel G36 - 150 mm;
- > Grinding wheel G60 - 150 mm;
- > Guards (x2);
- > Eye shields (x2);
- > Tool rests (x2);
- > Set of fixing nuts and bolts.

Accessories Page 146



Adjustable tool rests



Adjustable eye shields

**Packaging content**

- > Grinding wheel G36 - 200 mm;
- > Grinding wheel G60 - 200 mm;
- > Guards (x2);
- > Eye shields (x2);
- > Tool rests (x2);
- > Set of fixing nuts and bolts.

Accessories Page 146



VIESC150200

## Combined bench grinder

250W - 150/200mm



Find out more:



### Main features:

- › Four rubber feet for greater stability and vibration absorption;
- › On/Off switch protected against dust penetration.



Allows dry and wet grinding



Adjustable tool rests



Adjustable eye shields

### Packaging content

- › Grinding wheel G36 - 150 mm;
- › Grinding wheel G80 - 200 mm;
- › Water tank;
- › Guards;
- › Eye shields;
- › Tool rests (x2);
- › Set of fixing nuts and bolts.

Accessories Page 146

### Technical data

Rated power	250 W
Mains voltage	230 V - 50 Hz
No-load speed - dry grinding wheel	2950 rpm
Dry grinding wheel outer diameter	150 mm
Dry grinding wheel bore diameter	12.7 mm
Dry grinding wheel thickness	20 mm
No-load speed - wet grinding wheel	140 rpm
Wet grinding wheel outer diameter	200 mm
Wet grinding wheel bore diameter	20 mm
Wet grinding wheel thickness	40 mm
Type of grit	G36/G80
Duty cycle	S2 (30 min)
Weight	8.7 Kg
Dimensions	430 x 270 x 255 mm
Weight with packaging	9.7 Kg
Packaging dimensions	420 x 260 x 270 mm
Barcode	5604612711177

VIMFC450A

**Drill press**  
450W



Find out more:

VIMFC500A

**Drill press**  
500W



Find out more:

**Main features:**

- > Safety switch on the belt cover.

**Technical data**

Rated power	450 W
Mains voltage	230 V - 50 Hz
Speeds	12
No-load speed	200 - 2700 rpm
Duty cycle	S2 (30) min
Maximum working height	480 mm
Distance between chuck and column	125 mm
Work surface tilt	45° / 0° / 45°
Steel drilling	65 mm
Wood drilling	65 mm
Chuck fitting	B16
Chuck maximum capacity	16 mm
Drive belt	K500 (x2)
Work surface dimensions	200 x 195 mm
Base dimensions	235 x 350 mm
Sound power level (LWA)	80.5 dB(A)
Weight	28.35 Kg
Dimensions	450 x 290 x 840 mm
Weight with packaging	30.17 Kg
Packaging dimensions	680 x 430 x 280 mm
Barcode	5604612648008



Work surface inclination up to 45°.



Flying chips shield

**Packaging content**

- > Wrench.

Accessories Page 131 to 143, 136

**Main features:**

- > Depth stop.

**Technical data**

Rated power	500 W
Mains voltage	230 V - 50 Hz
Speeds	5
No-load speed	500 - 2500 rpm
Duty cycle	-
Maximum working height	260 mm
Distance between chuck and column	100 mm
Work surface tilt	45° / 0° / 45°
Steel drilling	25 mm
Wood drilling	50 mm
Chuck fitting	B16
Chuck maximum capacity	13 mm
Drive belt	K26
Work surface dimensions	160 x 160 mm
Base dimensions	190 x 295 mm
Sound power level (LWA)	84 dB(A)
Weight	13.92 Kg
Dimensions	440 x 190 x 615 mm
Weight with packaging	15.16 Kg
Packaging dimensions	460 x 380 x 245 mm
Barcode	5604612672843



Work surface inclination up to 45°.



Chuck guard against flying chips



Emergency stop switch

**Packaging content**

- > Wrench.

Accessories Page 131 to 143, 136

VISCC12210

## Combined circular saw

### 1200W - 210mm



Find out more:

VISCC18250

## Combined circular saw

### 1800W - 250mm

**NEW**

Find out more:

#### Main features:

- > Miter gauge fence for cutting table/ Side extension wings;
- > Adjustable turntable from -45° to + 45°;
- > Lower blade guard (table saw mode);
- > Automatic retraction of the blade guard.

#### Technical data

Rated power	1200 W
Mains voltage	230 V - 50 Hz
No-load speed	4200 rpm
Blade diameter	210 mm
Bore diameter	30 mm
Blade thickness	2 mm
Number of teeth on the blade	24
Cutting angle (miter)	- 45° / 0° / + 45°
Max. cutting width x depth 0°/0°	110 x 55 mm
Max. cutting width x depth 0°/45°	80 x 55 mm
Cutting angle (bevel)	0° / 45°
Max. cutting width x depth 45°/0°	110 x 33 mm
Max. cutting width x depth 45°/45°	80 x 33 mm
Maximum cutting depth	30 mm
Cutting table dimensions	340 x 240 mm
Sound power level (LWA)	113 dB(A)
Weight	8.9 Kg
Dimensions	400 x 390 x 500 mm
Weight with packaging	10.22 Kg
Packaging dimensions	420 x 400 x 308 mm
Barcode	5604612664350



Can be used as table saw



Bevel cutting angle from 0° to 45°



Dust and shavings suction port adaptor

#### Main features:

- > Miter gauge fence for cutting table/ Side extension wings;
- > Adjustable turntable from -45° to + 45°;
- > Lower blade guard (table saw mode);
- > Automatic retraction of the blade guard.

#### Technical data

Rated power	1800 W
Mains voltage	230 V - 50 Hz
No-load speed	4500 rpm
Blade diameter	250 mm
Bore diameter	30 mm
Blade thickness	2 mm
Number of teeth on the blade	36
Cutting angle (miter)	- 45° / 0° / + 45°
Max. cutting width x depth 0°/0°	130 x 75 mm
Max. cutting width x depth 0°/45°	130 x 50 mm
Cutting angle (bevel)	0° / 45°
Max. cutting width x depth 45°/0°	90 x 75 mm
Max. cutting width x depth 45°/- 45°	50 x 50 mm
Max. cutting width x depth 45°/+45°	120 x 38 mm
Maximum cutting depth	40 mm
Cutting table dimensions	416 x 352 mm
Sound power level (LWA)	108 dB(A)
Weight	14.5 Kg
Dimensions	900 x 545 x 350 mm
Weight with packaging	16 Kg
Packaging dimensions	545 x 345 x 380 mm
Barcode	5604612727123



Can be used as table saw



Bevel cutting angle from 0° to 45°



Dust and shavings suction port adaptor

#### Packaging content

- > Blade for wood cutting 210 mm;
- > Hex keys (x2);
- > Pin spanner.

Accessories Page 142

#### Packaging content

- > Blade for wood cutting 250 mm;
- > Hex key (2);
- > Dust collection bag;
- > Clamp;
- > 1 miter locking angle;
- > Side extension wings (x2);
- > Miter gauge fence.



VISCME210

## Sliding miter saw

1500W - 210mm

**NEW**




Find out more:



### Main features:

- > Double sliding rails;
- > Adjustable turntable from  $-45^\circ$  to  $+45^\circ$ ;
- > Laser guide;
- > Side supports;
- > Adjustable fence;
- > Clamp.



Bevel cutting angle from  $0^\circ$  to  $45^\circ$



Laser guide



Dust and shavings collection bag

### Packaging content

- > Blade for wood cutting 210 mm;
- > Hex key (x2);
- > Dust and shavings collection bag;
- > Clamp;
- > Miter locking handle;
- > Side plastic supports (x2);
- > Set of carbon brushes;
- > Set of washers for blade.

### Technical data

Rated power	1500 W
Mains voltage	230 V - 50 Hz
No-load speed	5000 rpm
Blade diameter	210 mm
Bore diameter	30 mm
Blade thickness	2.8 mm
Number of teeth on the blade	24
Cutting angle (miter)	$-45^\circ / 0^\circ / +45^\circ$
Max. cutting width x depth $0^\circ/0^\circ$	310 x 60 mm
Max. cutting width x depth $0^\circ/45^\circ$	310 x 36 mm
Cutting angle (bevel)	$0^\circ / 45^\circ$
Max. cutting width x depth $45^\circ/0^\circ$	210 x 60 mm
Max. cutting width x depth $45^\circ/45^\circ$	210 x 36 mm
Sound power level (LWA)	107 dB(A)
Weight	11 Kg
Dimensions	655 x 930 x 500 mm
Weight with packaging	13.44 kg
Packaging dimensions	725 x 455 x 365 mm
Barcode	5604612712716

Accessories Page 142



VISCME255

## Sliding miter saw

### 2100W - 255mm



Find out more:

VISCME305

## Sliding miter saw

### 2200W - 305mm



Find out more:

#### Main features:

- > Double sliding rails;
- > Adjustable turntable from -45° to + 45°;
- > Carrying handle;
- > Side extension wings;
- > Rear extension wing;
- > Clamp.

#### Technical data


Rated power	2100 W
Mains voltage	230 V - 50 Hz
No-load speed	4700 rpm
Blade diameter	255 mm
Bore diameter	30 mm
Blade thickness	2.8 mm
Number of teeth on the blade	36 dentes
Cutting angle (miter)	- 45° / 0° / + 45°
Max. cutting width x depth 0°/0°	300 x 85 mm
Max. cutting width x depth 0°/45°	300 x 85 mm
Cutting angle (bevel)	0° / 45°
Max. cutting width x depth 45°/0°	210 x 45 mm
Max. cutting width x depth 45°/45°	150/210 x 45 mm
Sound power level (LWA)	104 dB(A)
Weight	19.4 kg
Dimensions	950 x 870 x 620 mm
Weight with packaging	24 kg
Packaging dimensions	740 x 540 x 430 mm
Barcode	5604612695538



Bevel cutting angle from 0° to 45°



Laser guide



Dust and shavings collection bag

#### Packaging content

- > Blade for wood cutting 255 mm;
- > Hex key;
- > Dust and shavings collection bag;
- > Clamp;
- > Side extension wings;
- > Rear extension wings.


[Accessories Page 142](#)

#### Main features:


- > Double sliding rails;
- > Adjustable turntable from -45° to + 45°;
- > Carrying handle;
- > Side extension wings;
- > Rear extension wing;
- > Clamp.

#### Technical data

Rated power	2200 W
Mains voltage	230 V - 50 Hz
No-load speed	3900 rpm
Blade diameter	305 mm
Bore diameter	30 mm
Blade thickness	3 mm
Number of teeth on the blade	40 dentes
Cutting angle (miter)	- 45° / 0° / + 45°
Max. cutting width x depth 0°/0°	105 x 330 mm
Max. cutting width x depth 0°/45°	58/50 x 330 mm
Cutting angle (bevel)	45° / 0° / 45°
Max. cutting width x depth 45°/0°	105 x 235 mm
Max. cutting width x depth 45°/45°	58/50 x 230 mm
Sound power level (LWA)	109 dB(A)
Weight	24.4 Kg
Dimensions	1180 x 1020 x 490 mm
Weight with packaging	28.50 Kg
Packaging dimensions	750 x 685 x 580 mm
Barcode	5604612709365



Bevel cut at 45° on both sides



Laser guide



Dust and shavings collection bag

#### Packaging content

- > Blade for wood cutting 305 mm;
- > Hex key;
- > Dust and shavings collection bag;
- > Clamp;
- > Side extension wings;
- > Rear extension wings;
- > Replacement pair of carbon brushes;
- > Set of washers for blade.



VISCB18A

## Table saw

### 1800W - 250mm

**NEW**

Find out more:

VISCB20

## Table saw

### 2000W - 315mm



Find out more:

**Main features:**

- > Rip fence;
- > Miter gauge fence;
- > Stabilising feet.

Accessories Page 142

**Technical data**

Rated power	1800 W
Mains voltage	230 V - 50 Hz
No-load speed	5000 rpm
Blade diameter	250 mm
Bore diameter	30 mm
Blade thickness	2.8 mm
Number of teeth on the blade	24
Cutting angle (miter)	- 60° / 0° / + 60°
Max. cutting depth (0°)	85 mm
Max. cutting depth (45°)	65 mm
Cutting angle (bevel)	0° / 45°
Max. cutting depth (0°)	85 mm
Max. cutting depth (45°)	65 mm
Cutting table dimensions	560 x 580 mm
Sound power level (LWA)	104 dB(A)
Weight	20 kg
Dimensions	895 x 850 x 825 mm
Weight with packaging	24 Kg
Packaging dimensions	710 x 620 x 330 mm
Barcode	5604612712433

Bevel cutting angle  
from 0° to 45°Dust and shavings suction  
port adaptorTable extension  
640 x 200 mm**Packaging content**

- > Blade for wood cutting 250 mm;
- > Miter gauge fence and rip fence;
- > Suction hose;
- > Blade guard;
- > Feet;
- > Transverse cross bars;
- > Longitudinal cross bars;
- > Rear table extension;
- > Side table extensions;
- > Stabiliser bars for table extension;
- > Support bars for table extensions;
- > Hex keys;
- > Push stick.

**Main features:**

- > Induction motor;
- > Rip fence for cutting table;
- > Miter gauge fence;
- > Wheels and carrying handle.

Accessories Page 142

**Technical data**

Rated power	2000 W
Mains voltage	230 V - 50 Hz
No-load speed	2950 rpm
Blade diameter	315 mm
Bore diameter	30 mm
Blade thickness	3 mm
Number of teeth on the blade	40 dentes
Cutting angle (miter)	- 60° / 0° / + 60°
Max. cutting depth (0°)	87 mm
Max. cutting depth (45°)	60 mm
Cutting angle (bevel)	0° / 45°
Max. cutting depth (0°)	87 mm
Max. cutting depth (45°)	60 mm
Cutting table dimensions	840 x 580 mm
Sound power level (LWA)	109 dB(A)
Weight	48 kg
Dimensions	1645 x 580 x 830 mm
Weight with packaging	54 Kg
Packaging dimensions	870 x 590 x 445 mm
Barcode	5604612713058

Bevel cutting angle  
from 0° to 45°Dust and shavings suction  
port adaptorTable extension  
800 x 400 mm**Packaging content**

- > Blade for wood cutting 315 mm;
- > Rip fence;
- > Miter gauge fence;
- > Suction hose;
- > Hex key.

**Assembled product**

VISCB20.M 5604612667443

VISC12185A

**Circular saw**  
1200W - 185mm



Find out more:

VISC15185

**Circular saw**  
1500W - 185mm

**NEW**



Find out more:

**Main features:**

- > Blade guard;
- > ON/OFF switch lock-on button;
- > Auxiliary handle.

**Technical data**

Rated power	1200 W
Mains voltage	230 V - 50 Hz
Blade diameter	185 mm
Bore diameter	20 mm
Blade thickness	1.4 mm
Number of teeth on the blade	24
Cutting angle (miter)	0 - 45°
Maximum cutting depth (0°)	63 mm
Maximum cutting depth (45°)	43 mm
No-load speed	4500 rpm
Sound power level (LWA)	111 dB(A),
Weight	3.7 Kg
Dimensions	315 x 225 x 240 mm
Weight with packaging	4.33 Kg
Packaging dimensions	260 x 240 x 355 mm
Barcode	5604612675592

**Main features:**

- > Blade guard;
- > ON/OFF switch lock-on button;
- > Spindle lock;
- > Auxiliary handle.

**Technical data**

Rated power	1500 W
Mains voltage	230 V - 50 Hz
Blade diameter	185 mm
Bore diameter	20 mm
Blade thickness	3 mm
Number of teeth on the blade	24
Cutting angle (miter)	0 - 45°
Maximum cutting depth (0°)	65 mm
Maximum cutting depth (45°)	47 mm
No-load speed	5500 rpm
Sound power level (LWA)	105 dB(A)
Weight	3.9 Kg
Dimensions	310 x 235 x 270 mm
Weight with packaging	4.90 Kg
Packaging dimensions	290 x 250 x 215 mm
Barcode	5604612716745



Cutting angle adjustment from 0-45°



Cutting depth adjustment up to 63 mm



Dust and shavings suction port adaptor

**Packaging content**

- > Blade for wood cutting 185 mm;
- > Parallel guide;
- > Hex key;
- > Pin spanner;
- > Dust and shavings suction port adaptor.

Accessories Page 142



Cutting angle adjustment from 0-45°



Cutting depth adjustment up to 80 mm



Dust and shavings collection bag

**Packaging content**

- > Blade for wood cutting 185 mm;
- > Parallel guide;
- > Hex key;
- > Dust and shavings collection bag;
- > Dust and shavings suction port adaptor.

Accessories Page 142



VISC21235

## Circular saw

2100W - 235mm



Find out more:



### Main features:

- > Blade guard;
- > ON/OFF switch lock-on button;
- > Spindle lock;
- > Auxiliary handle.



Cutting angle adjustment from 0-45°



Cutting depth adjustment up to 80 mm



Dust and shavings suction port adaptor

### Packaging content

- > Blade for wood cutting 235 mm;
- > Parallel guide;
- > Hex key;
- > Replacement pair of carbon brushes;
- > Dust and shavings suction port adaptor.

### Technical data

Rated power	2100 W
Mains voltage	230 V - 50 Hz
Blade diameter	235 mm
Bore diameter	30 mm
Blade thickness	1.6 mm
Number of teeth on the blade	40 dentes
Cutting angle (miter)	0 - 45°
Maximum cutting depth (0°)	80 mm
Maximum cutting depth (45°)	60 mm
No-load speed	4500 rpm
Sound power level (LWA)	90 dB(A)
Weight	7.9 Kg
Dimensions	420 x 285 x 270 mm
Weight with packaging	9.19 Kg
Packaging dimensions	445 x 300 x 275 mm
Barcode	5604612663056

VITIC570

**Jig saw**  
570W



Find out more:

VITIC750

**Jig saw**  
750W



Find out more:

**Main features:**

- > Quick blade change;
- > Acrylic blade guard;
- > ON/OFF switch lock-on button;
- > Variable speed.

**Technical data**

Rated power	570 W
Mains voltage	230 V - 50 Hz
Number of strokes at no load	0 - 3000 cpm
Stroke length	19 mm
Pendulum movement positions	3
Speed setting levels	6
Type of fitting	VB 144
Type of blade	HCS/HSS
Cutting angle (left/right)	0° / 15° / 30° / 45°
Steel cutting capacity	8 mm
Aluminium cutting capacity	12 mm
Wood cutting capacity	65 mm
Sound power level (LWA)	101 dB(A)
Weight	2.1 Kg
Dimensions	220 x 73 x 210 mm
Weight with packaging	2.36 Kg
Packaging dimensions	270 x 85 x 215 mm
Barcode	5604612667665



Dust and shavings suction port adaptor

**Packaging content**

- > Cutting blade;
- > Parallel guide;
- > Dust and shavings suction port adaptor;
- > Hex key.

Accessories Page 144

**Main features:**

- > Quick blade change;
- > Acrylic blade guard;
- > ON/OFF switch lock-on button;
- > LED indicator light for power supply status;
- > Blowing function;
- > Variable speed.

**Technical data**

Rated power	750 W
Mains voltage	230 V - 50 Hz
Number of strokes at no load	0 - 3000 cpm
Stroke length	23 mm
Pendulum movement positions	3
Speed setting levels	6
Type of fitting	VB 144
Type of blade	HCS/HSS
Cutting angle (left/right)	0° / 15° / 30° / 45°
Steel cutting capacity	10 mm
Aluminium cutting capacity	20 mm
Wood cutting capacity	110 mm
Sound power level (LWA)	95 dB(A)
Weight	2.4 Kg
Dimensions	240 x 80 x 225 mm
Weight with packaging	2.73 Kg
Packaging dimensions	280 x 90 x 235 mm
Barcode	5604612667672



Laser guide for cutting position indication



LED light for work surface illumination



Dust and shavings suction port adaptor

**Packaging content**

- > Cutting blade;
- > Parallel guide;
- > Dust and shavings suction port adaptor;
- > Hex key.

Accessories Page 144

VIPL6

## Electric planer 600W



Find out more:

VIPL850

## Electric planer 850W



Find out more:

### Main features:

- › ON/OFF switch lock-on button.

### Technical data

Rated power	600 W
Mains voltage	230 V - 50 Hz
No-load speed	15000 rpm
Maximum cutting width	82 mm
Maximum cutting depth	2 mm
Sound power level (LWA)	97 dB(A)
Weight	2.5 Kg
Dimensions	285 x 160 x 160 mm
Weight with packaging	3.13 Kg
Packaging dimensions	290 x 160 x 165 mm
Barcode	5604612647889



Cutting depth adjustment

Dust and shavings suction  
port adaptor

### Packaging content

- › Parallel guide;
- › Wrench;
- › Kit for sharpening blades.

### Main features:


- › ON/OFF switch lock-on button.

### Technical data

Rated power	850 W
Mains voltage	230 V - 50 Hz
No-load speed	16500 rpm
Maximum cutting width	82 mm
Maximum cutting depth	3 mm
Maximum cutting depth	82 x 18 mm
Sound power level (LWA)	94 dB(A)
Weight	3.3 Kg
Dimensions	290 x 165 x 180 mm
Weight with packaging	3.98 Kg
Packaging dimensions	365 x 175 x 195 mm
Barcode	5604612691653



Cutting depth adjustment

Dust and shavings  
collection bag

### Packaging content

- › Parallel guide;
- › Dust and shavings collection bag;
- › Rebate depth guide;
- › Double open-end spanner;
- › Replacement pair of carbon brushes.

VILMB180

## Multi-pad sander 180W



Find out more:

VILV250

## Multi-pad sander 250W



Find out more:

### Main features:

- > Velcro-type fastening of the sanding sheets;
- > On/Off switch protected against dust penetration.

### Technical data

Rated power	180 W
Mains voltage	230 V - 50 Hz
No-load speed	12000 rpm
Oscillating circuit diameter	1.8 mm
Type of sandpaper	Sanding sheet
Sanding sheet dimensions - triangle	145 x 100 mm
Sanding sheet dimensions - square	110 x 100 mm
Sanding surface - triangle backing pad	145 x 100 mm
Sanding surface - square backing pad	110 x 100 mm
Sound power level (LWA)	94 dB(A)
Weight	1.24 Kg
Dimensions	270 x 105 x 150 mm
Weight with packaging	1.5 Kg
Packaging dimensions	215 x 115 x 155 mm
Barcode	5604612704216



Velcro-type fastening of the sanding sheets



Includes 2 oscillating bases



Included accessories

### Packaging content

- > Triangle sanding sheets (x2);
- > Square sanding sheets (x2);
- > Triangle backing pad;
- > Square backing pad;
- > Hex key;
- > Dust and shavings suction port adaptor;
- > Dust and shavings collection bag.

Accessories P. 147

### Main features:

- > ON/OFF switch lock-on button;
- > Velcro-type or screw clamp fastening of the sanding belts;
- > Variable speed.

### Technical data

Rated power	250 W
Mains voltage	230 V - 50 Hz
Number of oscillations per minute	12000 - 22000 opm
No-load speed	6000 - 11000 rpm
Speed setting levels	6
Oscillating circuit diameter	1.8 mm
Type of sandpaper	Sanding sheet
Velcro-type sanding sheet dimensions	93 x 187 mm
Clamping-type sanding sheet dimensions	93 x 230 mm
Sanding surface	90 x 187 mm
Sound power level (LWA)	88 dB(A)
Weight	1.81 Kg
Dimensions	340 x 95 x 180 mm
Weight with packaging	2.10 Kg
Packaging dimensions	315 x 139 x 200 mm
Barcode	5604612704193



6 speed-setting levels



Velcro-type fastening of the sanding sheets



Included accessories

### Packaging content

- > Sanding sheets (x2);
- > Dust and shavings tank.

Accessories Page 147, 148



VILO300

## Orbital sander 300W



Find out more:

VILOP430

## Orbital sander with auxiliary handle 430W

NEW



Find out more:

### Main features:

- > Velcro-type fastening of the sanding sheets;
- > Variable speed;
- > 6 speed levels.

### Technical data


Rated power	300 W
Mains voltage	230 V - 50 Hz
No-load speed	5000 - 12000 rpm
Oscillating circuit diameter	2 mm
Type of sandpaper	Sanding sheet
Backing pad diameter	Ø 125 mm
Sanding surface	Ø 125 mm
Sound power level (LWA)	96 dB(A)
Power cord length	2 m
Weight	1.44 Kg
Dimensions	240 x 125 x 150 mm
Weight with packaging	1.63 Kg
Packaging dimensions	215 x 130 x 165 mm
Barcode	5604612704209



6 speed-setting levels



Velcro-type fastening of the sanding sheets



Included accessories

### Packaging content

- > Sanding sheets (x2);
- > Dust and shavings tank.

Accessories Page 147, 148

### Main features:

- > ON/OFF switch lock-on button;
- > Velcro-type fastening of the sanding sheets;
- > Variable speed;
- > Adjustable auxiliary handle.

### Technical data


Rated power	430 W
Mains voltage	230 V - 50 Hz
No-load speed	4000 - 13500 rpm
Oscillating circuit diameter	5 mm
Type of sandpaper	Sanding sheet
Backing pad diameter	125 Ø mm
Sanding surface	125 Ø mm
Sound power level (LWA)	96 dB(A)
Power cord length	2 m
Weight	2.12 Kg
Dimensions	330 x 125 x 165 mm
Weight with packaging	2.45 Kg
Packaging dimensions	395 x 130 x 182 mm
Barcode	5604612726836



6 speed levels



Dust and shavings tank



Included

### Packaging content

- > Handle;
- > Dust and shavings collection tank;
- > Sanding sheet (x2).

Accessories Page 147



VILR900

## Belt sander 900W



Find out more:

VIT1200

## Plunge router 1200W



Find out more:

### Main features:

- > Quick sanding belt change system;
- > 3-position adjustable auxiliary handle;
- > ON/OFF switch lock-on button.

### Technical data

Rated power	900 W
Mains voltage	230 V - 50 Hz
No-load speed	120 - 380 rpm
Speed setting levels	6
Type of sandpaper	Sanding belt
Sandpaper dimensions	75 x 533 mm
Sanding surface	75 x 155 mm
Sound power level (LWA)	88,9 dB(A)
Weight	3.37 kg
Dimensions	370 x 160 x 215 mm
Weight with packaging	3.80 kg
Packaging dimensions	335 x 165 x 165 mm
Barcode	5604612705848



Sanding belt adjustment screw



Dust and shaving tank



Included accessories

### Packaging content

- > Sanding belts (x2);
- > Screw clamps (x2);
- > Shavings suction port adaptor;
- > Dust and shavings tank.

[Accessories Page 148](#)

### Main features:

- > ON/OFF switch lock-on button;
- > Spindle lock;
- > Adjustable depth stop.

### Technical data

Rated power	1200 W
Mains voltage	230 V - 50 Hz
No-load speed	10000-28000 rpm
Speed setting levels	7
Collet diameter	6/8 mm
Depth stop stages	5
Sound power level (LWA)	85 dB(A)
Weight	3.7 Kg
Dimensions	270 x 140 x 220 mm
Weight with packaging	4.83 Kg
Packaging dimensions	295 x 145 x 255 mm
Barcode	5604612649692



7 speed-setting levels



Dust and shavings suction port adaptor

### Packaging content

- > Parallel side fence;
- > Dust and shavings suction port adaptor;
- > Guide bush;
- > Beam trammel;
- > 6 and 8 mm collet;
- > Wrench.

[Accessories Page 144](#)

VIMLSF12A

## Cordless multi-tool 12V



Find out more:

VIKMF218A

## Mini rotary tool 135W



Find out more:

### Main features:

- > Lithium-ion battery without memory effect;
- > Velcro-type fastening of the sanding sheets;
- > 3 functions: sanding, cutting and scraping.

### Technical data

Rated voltage	12 V DC
Mains voltage	230 V - 50 Hz
Battery capacity	1.5 Ah
Battery charging time	45 min
No-load speed	5000 - 15000 rpm
Oscillating circuit diameter	2.8°
Speed setting levels	6
Type of sandpaper	Triangle sanding sheet
Sanding sheet dimensions	89 x 89 x 89 mm
Sanding surface	89 x 89 x 89 mm
Sound power level (LWA)	87 dB(A)
Weight	1.0 Kg
Dimensions	285 x 90 x 105 mm
Weight with packaging	2 Kg
Packaging dimensions	314 x 87 x 240 mm
Barcode	5604612708320



LED light for work surface illumination



Velcro-type fastening of the sanding sheets



Included accessories

### Packaging content

- > Cutting blade;
- > Metal spatula;
- > Battery charger;
- > Sanding sheets (x3);
- > Battery;
- > Triangle backing pad.



Page 147

### Accessories

#### Metal head

Referência VIMLSF12CM Ean 5604612654221



#### Metal spatula

Reference VIMLSF12E Ean 5604612656591



#### Blade

Reference VIMLSF12L Ean 5604612656607




### Main features:

- > Variable speed;
- > Spindle lock;
- > Quick change of accessories.

### Technical data

Rated power	135 W
Mains voltage	230 V - 50 Hz
No-load speed	10000 - 32000 rpm
Speed setting levels	6
Drill bit maximum diameter	3.2 mm
Weight	0.67 Kg
Dimensions	230 x 50 x 60 mm
Weight with packaging	2.10 Kg
Packaging dimensions	320 x 220 x 140 mm
Barcode	5604612677299



Hanging hook



Flexible shaft



218 accessories accessories

### Packaging content

- > Accessories (x218);
- > Flexible shaft;
- > Wrench;
- > Replacement pair of carbon brushes.



Accessories Page 146

VIAP575

## Nail/staple gun 575W

NEW



Find out more:

VIP1200A

## Polisher 1200W - 180mm



Find out more:

### Main features:

- > Protective rubber coating;
- > Metal magazine.

### Technical data

Rated power	575 W
Mains voltage	230 V - 50 Hz
Staple length	15 - 25
Nail length	15 - 32
Power cord length	2 m
Sound power level (LWA)	92 dB(A)
Magazine capacity	100
Shots per minute	20
Weight	1.7 kg
Dimensions	255 x 65 x 260 mm
Weight with packaging	3.0 Kg
Packaging dimensions	340x 80 x 320 mm
Barcode	5604612726232



Safety catch against unintentional triggering



Impact control knob

### Packaging content

- > Staples 19 mm x 300;
- > Nails 25 mm x 100;
- > Hex key.




### Main features:

- > Variable speed;
- > Spindle lock;
- > Safety button;
- > Metal gearbox.

### Technical data

Rated power	1200 W
Mains voltage	230 V - 50 Hz
No-load speed	1000 - 3300 rpm
Polishing pad diameter	180 mm
Spindle thread	M14
Speed setting levels	6
Sound power level (LWA)	97 dB(A)
Weight	3.00 Kg
Dimensions	530 x 220 x 190 mm
Weight with packaging	3.50 Kg
Packaging dimensions	500 x 180 x 135 mm
Barcode	5604612707620



6 speed-setting levels



Velcro backing pad



Included wool polishing pad

### Packaging content

- > Velcro backing pad;
- > Wool polishing pad;
- > Replacement pair of carbon brushes;
- > Hex key;
- > Auxiliary handle;
- > Inner hex screw.

Accessories Page 146

VIBEP

## Drywall screwdriver 600W



Find out more:

VILG800

## Drywall sander 800W



Find out more:

### Main features:

- › Adjustment of screwing depth;
- › Variable speed and reverse rotation;
- › ON/OFF switch lock-on button.

### Technical data

Rated power	600 W
Mains voltage	230 V - 50 Hz
No-load speed	0 - 2400 rpm
Bit drive	Hexagonal - 1/4"
Maximum screw diameter	6 mm
Sound power level (LWA)	82 dB(A)
Weight	1.92 Kg
Dimensions	340 x 75 x 200 mm
Weight with packaging	2.17 Kg
Packaging dimensions	365 x 80 x 255 mm
Barcode	5604612649685



Metal gearbox



Speed control button



Belt clip

### Main features:


- › Suction system compatible with vacuum cleaner;
- › Variable speed;
- › ON/OFF switch lock-on button;
- › Suction power control;
- › Velcro-type fastening of the sanding sheets.

### Technical data

Rated power	800 W
Mains voltage	230 V - 50 Hz
No-load speed	1200 - 2300 rpm
Backing pad diameter	235 mm
Velcro backing pad	180 mm
Auxiliary handle positions	2
Suction hose length	2 metres
Power cord length	4 metres
Sound power level (LWA)	99 dB(A)
Weight	2.45 Kg
Dimensions	310 x 235 x 250 mm
Weight with packaging	6.50 Kg
Packaging dimensions	265 x 215 x 175 mm
Barcode	5604612690847



Detachable accessory for sanding corners



LED light for work surface illumination



Dust and shavings collection bag

### Packaging content

- › Auxiliary handle;
- › 2-meter suction hose;
- › Dust and shavings collection bag;
- › Sanding discs 180 mm (x6);
- › Hex key;
- › Washers (x2);
- › Replacement pair of carbon brushes.



Accessories Page 148



VILGE710

## Telescopic drywall sander 710W



Find out more:




### Main features:

- › Suction system compatible with vacuum cleaner;
- › Variable speed;
- › ON/OFF switch lock-on button;
- › Quick fitting of backing pads;
- › Velcro-type fastening of the sanding sheets.

### Technical data

Rated power	710 W
Mains voltage	230 V - 50 Hz
No-load speed - round backing pad	800 - 1700 rpm
No-load speed - triangle backing pad	3000 - 6000 rpm
Suction guard diameter	260 mm
Round velcro backing pad diameter	215 mm
Velcro suction guard diameter	293 mm
Triangle backing pad	280 mm
Extension arm length	1.6 m
Suction hose length	4.5 m
Power cord length	4.2 m
Sound power level (LWA)	99 dB(A)
Weight	4.6 kg
Dimensions	1655 x 255 x 216 mm
Weight with packaging	11.4 kg
Packaging dimensions	720 x 245 x 330 mm
Barcode	5604612697372



Manoeuvrable sanding base



LED light for work surface illumination



Included accessories

### Packaging content

- › Backing pad + round velcro pad;
- › Backing pad + triangle velcro pad;
- › 4.5-meter suction hose;
- › Telescopic rod;
- › Triangle sanding sheets 285 mm (x6);
- › Sanding discs 225 mm (x6);
- › Hex key;
- › Vacuum cleaner adaptor;
- › Replacement pair of carbon brushes.



Accessories Page 148

VIMCC1400A

## Cement-glue paddle mixer 1400W



Find out more:

VIMCCD2050

## Twin shaft cement-glue paddle mixer 2050W

**NEW**



Find out more:

### Main features:

- > Metal gearbox;
- > Variable speed;
- > ON/OFF switch lock-on button.

### Technical data

Rated power	1400 W
Mains voltage	230 V - 50 Hz
Speeds	2
No-load speed - 1st speed	250 - 500 rpm
No-load speed - 2nd speed	400 - 800 rpm
Mixing paddle diameter	140 mm
Mixing paddle length	590 mm
Maximum mixing capacity	65 L
Spindle thread	M14
Sound power level (LWA)	104 dB(A)
Weight	4.19 Kg
Dimensions	320 x 200 x 310 mm
Weight with packaging	9.34 Kg
Packaging dimensions	400 x 325 x 265 mm
Barcode	5604612691691



Speed range selector



Speed control trigger

### Packaging content

- > Mixing paddle 590 x 140 mm;
- > Replacement pair of carbon brushes;
- > Double open-end spanner SW 22 (x2).



Accessories Page 140

### Main features:

- > Metal gearbox;
- > Variable speed;
- > ON/OFF switch lock-on button.

### Technical data

Rated power	2050 W
Mains voltage	230 V - 50 Hz
Speeds	2
No-load speed - 1st speed	0 - 480 rpm
No-load speed - 2nd speed	0 - 840 rpm
Mixing paddle diameter	100 mm
Mixing paddle length	590 mm
Maximum mixing capacity	100 L
Spindle thread	M27
Sound power level (LWA)	103 dB(A)
Weight	17.5 Kg
Dimensions	320 x 200 x 310 mm
Weight with packaging	18.5 Kg
Packaging dimensions	610 x 380 x 520 mm
Barcode	5604612727963



Speed range selector



Speed control trigger

### Packaging content

- > Replacement pair of carbon brushes;
- > Double open-end spanner SW 22 (x2).

Accessories Page 140





VIP1500

## Pipe welding machine 1500W

**NEW**



Find out more:



### Main features:


- > 3-position heating plate;
- > Red/green LED indicator lights.



Temperature control knob



Heating sockets



Included accessories

### Technical data

Rated power	1500 W
Mains voltage	230 V - 50 Hz
Temperature range	0-300 °C
Heating sockets	6
Heating sockets diameter	20 - 63 mm
Weight	1.1 Kg
Dimensions	460 x 150 x 220 mm
Weight with packaging	4.0 kg
Packaging dimensions	445 x 95 x 205 mm
Barcode	5604612672683

### Packaging content

- > Stand;
- > Hex key;
- > Pipe cutter;
- > 3 bolts for heating sockets;
- > 6 heating sockets.





VIPP600

## Paint sprayer 600W

NEW



Find out more:

VIMPA850

## Airless paint sprayer 850W

NEW



Find out more:

### Main features:

- > 4 spray patterns;
- > Air inlet filter.

### Technical data


Rated power	600 W
Paint flow rate	1.2 L/min
Tank capacity	1.2 L
Paint maximum viscosity	120 din/s
Power cord length	2 m
Sound power level (LWA)	106 dB(A)
Weight	1.53 kg
Dimensions	300 x 155 x 280 mm
Weight with packaging	1.75 kg
Packaging dimensions	288 x 180 x 205 mm
Barcode	5604612727147



Flow rate control knob



1.2 L tank



Spraying pressure

### Packaging content


- > Spray tips (x4);
- > Cleaning brush (x1);
- > Paint viscosity measuring cup (x1);
- > Spray tip cleaning needle (x1).

### Main features:


- > Safety trigger lock;
- > Double filter system (inlet/outlet);
- > 7.5-meter PVC hose.

### Technical data

Rated power	850 W
Size/type of spray tip	517 (0.017")
Paint flow rate	1.1 L/min
Spraying pressure	20 Mpa   3000 PSI
Hose maximum pressure	22.8 Mpa   3300 PSI
Spraying distance	250 - 350 mm
Hose length	7.5 m
Sound power level (LWA)	107 dB(A)
Weight	11.8 kg
Dimensions	280 x 425 x 1000 mm
Weight with packaging	15.5 kg
Packaging dimensions	460 x 230 x 495 mm
Barcode	5604612726225



Carrying handle



Pressure control knob



Spray gun extension pole

### Packaging content

- > 7.5 m hose;
- > Spray gun extension pole;
- > Double open-end spanners (x3);
- > Cleaning brush (x1);
- > Cleaning needle (1);
- > Spray gun (x1);
- > Spray tip 517 (x1).

VIPAQ2000

## Hot air gun 2000W

**NEW**



Find out more:

### Main features:

- > Quick cooling function;
- > Removable hot air outlet plastic guard.

### Technical data

Rated power	2000 W
Mains voltage	230 V - 50 Hz
Speeds	2
Operating temperature - 1st speed	50° C (cooling)
Operating temperature - 2nd speed	450° C
Operating temperature - 2nd speed	600° C
Air flow - 1st speed	500 L/min
Air flow - 2nd speed	250 L/min
Air flow - 3rd speed	500 L/min
Weight	0.81 Kg
Dimensions	250 x 85 x 240 mm
Weight with packaging	1.9 Kg
Packaging dimensions	340 x 280 x 112 mm
Barcode	5604612726195



Speed selector



Stable base for stationary use



Included accessories

### Packaging content

- > Set of 5 accessories.



VIPAQR2000

## Adjustable hot air gun 2000W

**NEW**



Find out more:

### Main features:

- > Ceramic heating element;
- > Quick cooling function;
- > Removable hot air outlet plastic guard.

### Technical data


Rated power	2000 W
Mains voltage	230 V - 50 Hz
Speeds	3 velocidades
Operating temperature - 1st speed	50° C (cooling)
Operating temperature - 2nd speed	50° C - 450° C
Operating temperature - 2nd speed	50° C - 600° C
Air flow - 1st speed	250 L/min
Air flow - 2nd speed	250 L/min
Air flow - 3rd speed	500 L/min
Weight	0.89 Kg
Dimensions	255 x 85 x 240 mm
Weight with packaging	2.1 Kg
Packaging dimensions	340 x 280 x 112 mm
Barcode	5604612726201



Temperature control dial



Stable base for stationary use



Included accessories

### Packaging content

- > Set of 5 accessories.





VIPAQD2000

## Digital hot air gun 2000W

**NEW**



Find out more:



### Main features:

- > Ceramic heating element;
- > Quick cooling function;
- > Removable hot air outlet plastic guard.



Digital control



Stable base for stationary use



Stainless steel accessories

### Packaging content

- > Set of 5 stainless steel accessories.



### Technical data

Rated power	2000 W
Mains voltage	230 V - 50 Hz
Speeds	2
Operating temperature - 1st speed	50° C (cooling)
Operating temperature - 2nd speed	50° C - 650° C
Air flow - 1st speed	250 - 500 L/min
Air flow - 2nd speed	250 - 500 L/min
Weight	0.93 Kg
Dimensions	260 x 85 x 250 mm
Weight with packaging	2.1 Kg
Packaging dimensions	340 x 280 x 112 mm
Barcode	5604612726218

VIGE500

**Electric winch**  
100/200kg



Find out more:

VIGE1000

**Electric winch**  
250/500kg



Find out more:

**Main features:**

- > Automatic braking system;
- > Up and down limit switch;
- > 3 mm galvanised steel cable.

**Technical data**

Rated power	500 W
Mains voltage	230 V - 50 Hz
Wire rope length (double)	6 metres
Wire rope length (single)	12 metres
Lifting capacity (double wire rope)	200 kg
Lifting capacity (single wire rope)	100 kg
Lifting speed (double wire rope)	4 m/min
Lifting speed (single wire rope)	8 m/min
Pendant control station cable length	1.5 m
Sound power level (LWA)	71 dB(A)
Weight	9.64 Kg
Dimensions	350 x 130 x 190 mm
Weight with packaging	10.88 Kg
Packaging dimensions	360 x 230 x 145 mm
Barcode	5604612648015

**Main features:**

- > Automatic braking system;
- > Up and down limit switch;
- > 4 mm galvanised steel cable.

**Technical data**

Rated power	1000 W
Mains voltage	230 V - 50 Hz
Wire rope length (double)	6 metres
Wire rope length (single)	12 metres
Lifting capacity (double wire rope)	500 Kg
Lifting capacity (single wire rope)	250 Kg
Lifting speed (double wire rope)	4 m/min
Lifting speed (single wire rope)	8 m/min
Pendant control station cable length	1.5 m
Sound power level (LWA)	71 dB(A)
Weight	15.28 Kg
Dimensions	380 x 145 x 210 mm
Weight with packaging	16.81 Kg
Packaging dimensions	405 x 145 x 245 mm
Barcode	5604612648022



Emergency push-button



Beam fixing brackets



Emergency push-button



Beam fixing brackets

**Packaging content**

- > Beam bracket;
- > Set of bolts and washers.

**Packaging content**

- > Beam bracket;
- > Set of bolts and washers.

# LASER LEVELS AND MEASURERS



VIMDL20

## Laser distance measurer

**REDEYE**



Find out more:

VIMDAVL60

## Digital laser measurer – distances, areas and volumes

**REDEYE**



Find out more:

### Main features:

- › Compact and lightweight design;
- › Easy to store and transport.

### Technical data

Rated voltage	3 V (2 x 1.5 V LR03)
Laser wavelength	650 Nm
Laser beam output	Class 2 < 1 mW
Units of measure	m/ft
Measuring range	0.2 - 20 m
Accuracy	± 3.0 mm/m
Automatic switch-off - laser	30 seconds
Automatic switch-off - screen	180 seconds
Operating temperature	0 - 40° C
Weight	46 g
Dimensions	36 x 22 x 102 mm
Weight with packaging	140 g
Packaging dimensions	120 x 80 x 200 mm
Barcode	5604612689254



Backlit two-line display

### Packaging content

- › 2 x alkaline batteries 1,5 V LR03 (AAA).

### Main features:


- › Continuous measurement function;
- › Memory unit that stores last 20 measurements;
- › Acoustic beeper;
- › Area/volume calculation, addition/subtraction mode, indirect Pythagoras theorem and minimum/maximum value calculation.

### Technical data

Rated voltage	3 V (2 x 1.5 V LR03)
Laser wavelength	630 - 670 nm
Laser beam output	Class 2 < 1 mW
Units of measure	m / in / ft / ft + in
Measuring range	0.2 - 60 m
Accuracy	± 2 mm/m
Automatic switch-off - laser	30 seconds
Automatic switch-off - screen	180 seconds
Operating temperature	0 - 40° C
Weight	105 g
Dimensions	50 x 30 x 120 mm
Weight with packaging	280 g
Packaging dimensions	80 x 60 x 155 mm
Barcode	5604612689261



Backlit four-line display



Includes 1 spirit level

### Packaging content

- › 2 x alkaline batteries 1,5 V LR03 (AAA).



VILALC10

## Self-levelling cross-line laser level 10m



Find out more:

VILAPHLV2

## Self-levelling laser level horizontal plane 360° + vertical line 10m



Find out more:

### Main features:

- > Cross-line projection;
- > Self levelling up to 3° in 5 seconds;
- > Pendulum lock;
- > 1/4" mounting thread.

### Technical data

Rated voltage	3 V (2 x 1.5 V LR03)
Laser wavelength	635 nm
Laser beam output	Class 2 < 1 mW
Laser line width	100 lux, 3 mm/5 m
Reach	10 metres
Accuracy	± 0.5 mm/m
Running time	> 15 hours
Operating temperature	0 - 40° C
Weight	160 g
Dimensions	65 x 55 x 68 mm
Weight with packaging	325 g
Packaging dimensions	120 x 62 x 240 mm
Barcode	5604612689230

### Packaging content

- > 2 x alkaline batteries 1,5 V LR03 (AAA).

### Main features:

- > Vertical, horizontal and crossed line projection;
- > Self levelling up to 4° in 4 seconds;
- > Pendulum lock;
- > 1/4" mounting thread.

### Technical data

Rated voltage	6 V (4 x 1.5 V LR06)
Laser wavelength	635 nm
Laser beam output	Class 2 < 1 mW
Laser line width	100 lux, 3 mm/5 m
Reach	10 metres
Accuracy	± 0.5 mm/m
Running time	> 15 hours
Operating temperature	0 - 40° C
Weight	330 g
Dimensions	100 x 70 x 110 mm
Weight with packaging	615 g
Packaging dimensions	155 x 75 x 260 mm
Barcode	5604612689247

### Packaging content

- > 4 x alkaline batteries 1,5 V LR06 (AA).

## Laser measures and levels - Accessories

### Clamp

- > 1/4" thread



Reference  Ean  
VIGL 10 5604612689285

### Bracket

- > 1/4" thread
- > Magnetic



Referência  Ean  
VISLA 10 5604612715076

### Tripod

- > 1/4" thread
- > 60 - 150 cm



Referência  Ean  
VITL 10 5604612689278

VILALC20V

## Self-levelling green cross-line laser level 20m

**NEW**



Find out more:

VILAPHVT20V

## Self-levelling horizontal plane 360° + green vertical lines laser level 20m

**NEW**



Find out more:

### Main features:

- > Vertical, horizontal and crossed line projection;
- > Self levelling up to 4° in 4 seconds;
- > Pendulum lock;
- > 1/4" mounting thread.

### Technical data

Rated voltage	3 V (2 x 1,5 V LR06)
Laser wavelength	510 - 520 nm
Laser beam output	Class 2 < 1 mW
Laser line width	100 lux, 3 mm/5 m
Reach	20 metres
Accuracy	± 0,5 mm/m
Running time	> 3 hours
Operating temperature	0 - 40° C
Weight	285 g
Dimensions	55 x 71 x 85 mm
Weight with packaging	0.43
Packaging dimensions	120 x 65 x 245 mm
Barcode	5604612712839

### Main features:

- > Cross-line projection;
- > Self levelling up to 3° in 5 seconds;
- > Pendulum lock;
- > 1/4" mounting thread.

### Technical data

Rated voltage	6 V (4 x 1,5 V LR06)
Laser wavelength	510 - 520 nm
Laser beam output	Class 2 < 1 mW
Laser line width	100 lux, 3 mm/5 m
Reach	20 metres
Accuracy	± 0,5 mm/m
Running time	> 3 hours
Operating temperature	0 - 40° C
Weight	500 g
Dimensions	85 x 110 x 110 mm
Weight with packaging	1.08 kg
Packaging dimensions	170 x 180 x 135 mm
Barcode	5604612712846




Projection of green  
crossed lines.



Self-levelling LED  
indicator (up to 4° in 4  
seconds).



Projection of vertical,  
horizontal and crossed  
green lines.



Self-levelling LED  
indicator  
(up to 4° in 5 seconds).

### Packaging content

- > 2 x alkaline batteries 1.5 V LR06 (AA).

### Packaging content

- > 4 x alkaline batteries 1.5 V LR06 (AA).

# COMPRESSORS AND ACCESSORIES



VICSOS6

## Silent oil-free compressor 6L



Find out more:

VICSOS25

## Silent oil-free compressor 24L



Find out more:

### Main features:

- > Low-noise oil-free motor;
- > ON/OFF switch;
- > Thermal protection.

### Technical data

Motor power	0.7 hp / 0.5 kW
Mains voltage	230 V - 50 Hz
Rotation speed	1400 rpm
Operating pressure	8 bar - 115 psi
Maximum airflow	89 L/min
Tank capacity	6 L
IP code	IP20
Sound power level (LWA)	79 dB(A)
Weight	13.7 kg
Dimensions	460 x 145 x 470 mm
Weight with packaging	15.5 kg
Packaging dimensions	460 x 230 x 495 mm
Barcode	5604612711184

### Main features:

- > Low-noise oil-free motor;
- > ON/OFF switch;
- > Pressure relief valve;
- > Thermal protection.

### Technical data

Motor power	1 cv / 0.75 kW
Mains voltage	230 V - 50 Hz
Rotation speed	1440 rpm
Operating pressure	8 bar - 115 psi
Maximum airflow	70 L/min
Tank capacity	24 L
IP code	IP20
Sound power level (LWA)	79 dB(A)
Weight	18.5 kg
Dimensions	515 x 310 x 555 mm
Weight with packaging	21 kg
Packaging dimensions	600 x 250 x 540 mm
Barcode	5604612711092




Quick-release connector




2 front feet + 2 rear feet



Corrugated filter



Quick-release connector



1 front foot + fixed wheels



Corrugated filter

### Packaging content

- > Rubber feet (x4);
- > Air filter;
- > Set of fixing nuts and bolts.

Accessories Page 89

### Packaging content

- > Fixed wheels (x2);
- > Rubber foot;
- > Air filter;
- > Set of fixing nuts and bolts.

Accessories Page 89



VICSOS50

## Belt-driven oil-free compressor 50L



Find out more:




### Main features:

- > Low-noise oil-free motor;
- > ON/OFF switch;
- > Pressure relief valve;
- > Thermal protection.



Quick-release  
connector



2 front feet  
+ fixed wheels



Dual corrugated filter

### Packaging content

- > Fixed wheels (x2);
- > Rubber feet (x2);
- > Air filter (x2);
- > Set of fixing nuts and bolts.

### Technical data

Motor power	1.5 cv / 1.1 kW
Mains voltage	230 V - 50 Hz
Rotation speed	1440 rpm
Operating pressure	8 bar - 115 psi
Maximum airflow	70 L/min
Tank capacity	50 L
IP code	IP20
Sound power level (LWA)	79 dB(A)
Weight	30.5 kg
Dimensions	620 x 365 x 670 mm
Weight with packaging	33 kg
Packaging dimensions	680 x 310 x 690 mm
Barcode	5604612711108

Accessories Page 89

VIC025A

## Belt-driven compressor 24L



Find out more:

VIC050A

## Belt-driven compressor 50L



Find out more:

### Main features:

- > ON/OFF switch;
- > Pressure relief valve;
- > Tank top outlet for fixed compressed air network connection;
- > Thermal protection.

### Technical data

Motor power	2.5 cv / 1.9 kW
Mains voltage	230 V - 50 Hz
Rotation speed	2850 rpm
Operating pressure	10 bar / 145 psi
Maximum airflow	206 L/min
Tank capacity	24 L
Motor oil	15W-40
Motor oil crankcase capacity	250 ml
IP code	IP20
Sound power level (LWA)	97 dB(A)
Weight	24.7 kg
Dimensions	570 x 305 x 590 mm
Weight with packaging	27 kg
Packaging dimensions	600 x 255 x 600 mm
Barcode	5604612710743

### Main features:

- > ON/OFF switch;
- > Pressure relief valve;
- > Tank top outlet for fixed compressed air network connection;
- > Thermal protection.

### Technical data

Motor power	2.5 cv / 1.9 kW
Mains voltage	230 V - 50 Hz
Rotation speed	2850 rpm
Operating pressure	10 bar / 145 psi
Maximum airflow	206 L/min
Tank capacity	50 L
Motor oil	15W-40
Motor oil crankcase capacity	250 ml
IP code	IP20
Sound power level (LWA)	97 dB(A)
Weight	33.2 kg
Dimensions	750 x 380 x 665 mm
Weight with packaging	36 kg
Packaging dimensions	780 x 325 x 700 mm
Barcode	5604612710750



Quick-release couplings



Oil level sight glass



2 front feet  
+ 2 fixed wheels



Quick-release couplings



Oil level sight glass



2 front feet  
+ 2 fixed wheels

### Packaging content

- > Fixed wheels (x2);
- > Rubber feet (x2);
- > Air filter;
- > Set of fixing nuts and bolts.

Accessories Page 89

### Packaging content

- > Fixed wheels (x2);
- > Rubber feet (x2);
- > Air filter;
- > Set of fixing nuts and bolts.

Accessories Page 89

VICOC50

## Belt-driven compressor 50L



Find out more:

VICOC100

## Belt-driven compressor 100L



Find out more:

### Main features:

- > ON/OFF switch;
- > Pressure relief valve;
- > Tank top outlet for fixed compressed air network connection;
- > Thermal protection.

### Technical data

Motor power	2.5 cv / 1.9 kW
Mains voltage	230 V - 50 Hz
Rotation speed	1400 rpm
Operating pressure	8 bar - 115 psi
Maximum airflow	233 L/min
Tank capacity	50 L
Motor oil	15W-40
Motor oil crankcase capacity	326 ml
IP code	IP20
Sound power level (LWA)	95 dB(A)
Weight	49.8 Kg
Dimensions	1165 x 370 x 675 mm
Weight with packaging	53.1 Kg
Packaging dimensions	940 x 380 x 690 mm
Barcode	5604612642112

Quick-release coupling  
+ male/female tap

Oil level sight glass

2 front feet  
+ 2 rear wheels

### Packaging content

- > Fixed wheels (x2);
- > Feet (x2);
- > Carrying handle;
- > Air filter;
- > Crankcase cover;
- > Set of fixing nuts and bolts;
- > Hex key.

Accessories Page 89

### Main features:

- > ON/OFF switch;
- > Pressure relief valve;
- > Tank top outlet for fixed compressed air network connection;
- > Thermal protection.

### Technical data

Motor power	2.5 cv / 1.9 kW
Mains voltage	230 V - 50 Hz
Rotation speed	1400 rpm
Operating pressure	8 bar - 115 psi
Maximum airflow	233 L/min
Tank capacity	100 L
Motor oil	15W-40
Motor oil crankcase capacity	326 ml
IP code	IP20
Sound power level (LWA)	95 dB(A)
Weight	59.1 Kg
Dimensions	1225 x 430 x 835 mm
Weight with packaging	64.5 Kg
Packaging dimensions	1080 x 425 x 820 mm
Barcode	5604612642129

Quick-release coupling +  
male/female tap

Oil level sight glass

2 front feet  
+ 2 rear wheels

### Packaging content

- > Fixed wheels (x2);
- > Feet (x2);
- > Carrying handle;
- > Air filter;
- > Crankcase cover;
- > Set of fixing nuts and bolts;
- > Hex key.

Accessories Page 89



**VITO PRO**  
200 | PF



VICOC200B

## Belt-driven compressor 200L



Find out more:

VICOC300B

## Belt-driven three-phase compressor 300L



Find out more:

### Main features:

- > ON/OFF switch;
- > Non return and pressure relief valve;
- > Tank top outlet for fixed compressed air network connection;
- > Thermal protection.
- > Oil level sight glass.

### Technical data

Motor power	4 cv / 3 kW
Mains voltage	230 V - 50 Hz
Rotation speed	2800 rpm
Operating pressure	10 bar / 145 psi
Maximum airflow	400 L/min
Tank capacity	200 L
Motor oil	15W-40
Motor oil crankcase capacity	1000 ml
IP code	IP44
Sound power level (LWA)	85 dB(A)
Weight	120 Kg
Dimensions	1375 x 440 x 855 mm
Weight with packaging	136 Kg
Packaging dimensions	1400 x 470 x 940 mm
Barcode	5604612710569



Drive belt

Outlet valves with  
pressure regulatorThermal  
protection

### Packaging content

- > Swivel caster wheels (x2);
- > Fixed wheels (x2);
- > Carrying handle;
- > Set of fixing nuts and bolts.

[Accessories Page 89](#)

### Main features:

- > ON/OFF switch;
- > Non return and pressure relief valve;
- > Tank top outlet for fixed compressed air network connection;
- > Thermal protection;
- > Oil level sight glass.

### Technical data

Motor power	5.5 cv / 4 kW
Mains voltage	230 V - 50 Hz
Rotation speed	2800 rpm
Operating pressure	10 bar / 145 psi
Maximum airflow	500 L/min
Tank capacity	290 L
Motor oil	15W-40
Motor oil crankcase capacity	1700 ml
IP code	IP44
Sound power level (LWA)	83 dB(A)
Weight	180 Kg
Dimensions	1590 x 550 x 1100 mm
Weight with packaging	190 Kg
Packaging dimensions	1620 x 550 x 1070 mm
Barcode	5604612710576

Transport swivel caster  
wheelsTank top outlet for flexible  
compressed air network  
connectionOil level  
sight glass

### Packaging content

- > Swivel caster wheels (x2);
- > Fixed wheels (x2);
- > Carrying handle;
- > Set of fixing nuts and bolts.

[Accessories Page 89](#)

## Overview Compressors



Technical data	VICOC50	VICOC100	VICOC200B	VICOC300B
Motor power	2.5 hp / 1.9 kW	2.5 hp / 1.9 kW	4 hp / 3 kW	5.5 hp / 4 kW
Rotation speed	1400 rpm	1400 rpm	2800 rpm	2800 rpm
Operating pressure	8 bar - 115 psi	8 bar - 115 psi	10 bar - 145 psi	10 bar - 145 psi
Maximum airflow	233 L/min	233 L/min	400 L/min	500 L/min
Tank capacity	50 L	100 L	200 L	290 L
Motor oil	15W-40	15W-40	15W-40	15W-40
Motor oil crankcase capacity	326 ml	326 ml	1000 ml	1700 ml
Mains voltage	230 V AC 50Hz	230 V AC 50Hz	230 V AC 50Hz	230 V AC 50Hz
Thermal protection	✓	✓	✓	✓
ON/OFF switch	✓	✓	✓	✓
Pressure relief valve	✓	✓	✓	✓
Non return valve (check valve)	-	-	✓	✓
Male/female tap	✓	✓	-	-
Top outlet for fixed compressed air network connection	✓	✓	✓	✓
Top outlet for flexible flexible air network connection	-	-	✓	✓
IP code	IP20	IP20	IP44	IP44
Sound pressure level (LpA)	-	-	72 dB(A)	74 dB(A)
Sound power level (LWA)	95 dB(A)	95 dB(A)	85 dB(A)	83 dB(A)
Weight	49.8 Kg	59.1 Kg	120 kg	180 Kg
Dimensions	1165 x 370 x 675 mm	1225 x 430 x 835 mm	1375 x 440 x 855 mm	1590 x 550 x 1100 mm
Weight with packaging	53.1 Kg	64.5 Kg	136 kg	190 kg
Packaging dimensions	940 x 380 x 690 mm	1080 x 425 x 820 mm	1400 x 470 x 940 mm	1620 x 550 x 1070 mm

### Packaging content

Swivel caster wheels	-	-	✓	✓
Fixed wheels	✓	✓	✓	✓
Feet	✓	✓	-	-
Carrying handle	✓	✓	✓	✓
Air filter	✓	✓	✓	✓
Crankcase cover	✓	✓	✓	✓
Set of fixing nuts and bolts	✓	✓	✓	✓
Hex key	✓	✓	-	-




### Pneumatic drill



#### Features:

- > No-load speed: 1800 rpm;
- > Maximum air pressure: 6.2 bar;
- > Air consumption: 142 L/min;
- > Drill bit maximum diameter: 10 mm (3/8");
- > Air inlet thread: 1/4";
- > Reverse rotation.


Reference		Ean
VIBP38A	10	5604612692452

### Pneumatic angle grinder



#### Features:

- > No-load speed: 11000 rpm;
- > Maximum air pressure: 6.2 bar;
- > Air consumption: 170 L/min;
- > Disc diameter: 100 mm;
- > Bore diameter: 10 mm;
- > Air inlet thread: 1/4";
- > Spindle thread: 3/8", UNF 24.

Reference		Ean
VIRP100	10	5604612692476

### Pneumatic sander



#### Features:

- > No-load speed: 10000 rpm;
- > Maximum air pressure: 6.2 bar;
- > Air consumption: 79.3 L/min;
- > Velcro backing pad diameter: 150 mm;
- > Air inlet thread: 1/4";
- > Spindle thread: 5/16", UNF 24.

Reference		Ean
VILP150	10	5604612692445

## Pneumatic Impact wrench

### Content:

- > 10 drive impact sockets: 9 · 10 · 11 · 13 · 14 · 17 · 19 · 22 · 24 · 27 mm;
- > Oil bottle;
- > Extension bar;
- > Air hose coupling;
- > Lubricator cup.



### Features:

- > Anti-shock system;
- > Reverse rotation;
- > No-load speed: 7000 rpm;
- > Maximum torque: 310 Nm;
- > Torque setting positions: 4;
- > Operating pressure: 6.3 bar;
- > Air consumption: 350 L/min;
- > Impact socket drive: 1/2";
- > Air inlet thread: 1/4" (NPT).


Reference		Ean
VIKCI12	5	5604612681739

## Air ratchet wrench 1/2"



### Features:

- > Reverse rotation;
- > No-load speed: 160 rpm;
- > Maximum torque: 81 Nm;
- > Operating pressure: 6.3 bar;
- > Air consumption: 113 L/min;
- > Impact socket drive: 1/2";
- > Air inlet thread: 1/4" (NPT).


Reference		Ean
VICRP12	10	5604612681722

## Pneumatic nail/staple gun



### Features:


- > Depth adjustment;
- > Air outlet adjustment;
- > Safety trigger lock;
- > Maximum pressure: 8.3 bar;
- > Operating pressure: 4 - 7 bar;
- > Air consumption: 53.4 L/min;
- > Air consumption per shot: 0.22 L;
- > Nail length: 15 - 50 mm;
- > Staple length: 16 - 40 mm;
- > Staple width: 5 mm;
- > Capacity: 100 nails/staples;
- > Air inlet thread: 1/4" (NPT).

Reference		Ean
VIAPP	10	5604612621490

## Staples for pneumatic staple/nail gun


1000 pieces




Reference	Dimensions		Ean
VIAFP16	16 mm	50	5604612625436
VIAFP20	20 mm	50	5604612625443
VIAFP25	25 mm	50	5604612625450
VIAFP32	32 mm	50	5604612625467
VIAFP40	40 mm	50	5604612625474

## Nails for pneumatic staple/nail gun

1000 pieces



Reference	Dimensions		Ean
VIPFP20	20 mm	100	5604612625399
VIPFP30	30 mm	100	5604612625405
VIPFP40	40 mm	50	5604612625412
VIPFP50	50 mm	50	5604612625429

## Professional compressed air Tool kit - 8 pieces




### Content:

- > Washing gun;
- > Spray gun;
- > Blow gun;
- > Spiral air hose - 5 m;
- > Inflating gun with pressure gauge;
- > Inflating accessories.

### Main features:


- > 8 bar max;
- > 1/4" - 6 mm;
- > Quick coupling.

Reference		Ean
VIKITC08	10	5604612715762

## Adjustable air blow gun



- > 10 bar max;
- > 1/4" - 6 mm;
- > Quick coupling.

Reference		Ean
VIPLSR100	50	5604612692469

## Metal standard air gun for cleaning



- > 10 bar max;
- > 1/4" - 6 mm;
- > Quick coupling.

Reference		Ean
VIPLP	10	5604612017620

## Standard air gun for cleaning

- 3 nozzle kit



- > 10 bar max;
- > 1/4" - 6 mm;
- > Quick coupling.

Reference		Ean
VIPLP3	25	5604612681715

## Washing gun




- > Cup capacity: 1 L;
- > 8 bar max;
- > 1/4" - 6 mm;
- > Quick coupling.

Reference		Ean
VIPLV	10	5604612019389

**Gravity feed  
spray  
gun**



- > Cup capacity: 600 ml;
- > 3 - 5 bar;
- > 1/4" - 6 mm;
- > Quick coupling.

Reference		Ean
VIA1862	10	5604612017668

**Suction feed  
spray gun**



- > Cup capacity: 1 L;
- > 3 - 5 bar;
- > 1/4" - 6 mm;
- > Quick coupling.

Reference		Ean
VIPPT	10	5604612017651

**Inflating gun  
with pressure gauge**




- > 10 bar max;
- > 1/4" - 6 mm;
- > Quick coupling.

Reference		Ean
VIPM	10	5604612017637

**Professional inflating gun  
with pressure gauge**




- > 15 bar max;
- > 1/4" - 6 mm;
- > Quick coupling.

Reference		Ean
VIPEM	6	5604612692018

**Cristal  
air compressor hose**



- > Quick coupling.

Reference	Length		Ean
VIMC10	10 m	10	5604612613297
VIMC20	20 m	10	5604612613303

**Spiral  
air hose**



Reference	Length		Ean
VIME	10 m	10	5604612017613

### Single-phase pressure switch 1 way

- > 1.5 - 12 bar;
- > 1/4" - 6 mm;



Reference		Ean
VIPM1V	30	5604612671488

### Single-phase pressure switch 4 way

- > 1.5 - 12 bar;
- > 1/4" - 6 mm.



Reference		Ean
VIPM4V	30	5604612671495

### Air filter regulator lubricator

- > 0 - 10 bar;
- > 1/4" - 6 mm;
- > 800 L/min.



Reference		Ean
VIFC14	25	5604612034535

### Air filter regulator lubricator

- > 0 - 10 bar;
- > 1/2" - 12 mm;
- > 4000 L/min.



Reference		Ean
VIFC12	10	5604612034528

### Pressure gauge



Reference		Ean
VIA780	6	5604612017477
VIA760	6	5604612017460

### Compressor lever ball valve



Reference	Dimensões		Ean
VITRC38	3/8 "	10	5604612119034
VITRC14	1/4 "	10	5604612019365
VITRC12	1/2 "	10	5604612119027

### Male/female compressor tap

- > 1/4" - 6 mm.



Reference	Dimensions		Ean
VITCB	1/4 - 6 mm	10	5604612017262

**Snap coupling with female threaded joint**

> Quick coupling.



Reference	Dimensions		Ean
VIA459	1/4"- 6 mm	10	5604612017293

**Snap coupling with male threaded joint**

> Encaixe rápido.



Reference	Dimensions		Ean
VIA460	1/4"- 6 mm	10	5604612017286

**Snap coupling with rubber hose sleeve**

> Quick coupling.



Reference	Dimensions		Ean
VIA458	1/4"- 6 mm	10	5604612017309

**Linear joint with milled nuts**



Reference	Dimensions		Ean
VIJD	1/4"- 6 mm	10	5604612017415

**Male threaded snap coupling with rubber sleeve**



Reference	Dimensions		Ean
VIA448	1/4"- 6 mm	10	5604612017330

**Bayonet joint with hose sleeve**



Reference	Dimensions		Ean
VIA3851	6 x 14 mm	10	5604612017323

**Bayonet joint with hose sleeve**



Reference	Dimensions		Ean
VIA3852	8 x 17 mm	10	5604612017316

**Millet nuts**

2 pieces



Reference	Dimensions		Ean
VIAJ	1/4"- 6 mm	10	5604612017422

**Male threaded fittings with milled nuts**

2 pieces



Reference	Dimensions		Ean
VIJS	1/4"- 6 MM	10	5604612017439

**Male threaded bayonet fittings**

2 pieces



Reference	Dimensions		Ean
VIA390	1/4"- 6 mm	10	5604612017347

**Snap couplings with bayonet joint**

2 pieces



Reference	Dimensions		Ean
VIA446	1/4"- 6 mm	10	5604612017361

**Barbed hose tail fittings**

2 pieces



Reference	Dimensions		Ean
VIA3651	1/4"- 6 mm	10	5604612017354

**Female threaded high flow adaptor**

2 pieces



Reference	Dimensions		Ean
VIA449	1/4"- 6 mm	10	5604612679323

**Male threaded high flow adaptor**

2 pieces



Reference	Dimensions		Ean
VIA450	1/4"- 6 mm	10	5604612017385

**Male threaded hose tail adaptor**

2 pieces



Reference	Dimensions		Ean
VIA370	1/4"- 6 mm	10	5604612017392

**Bayonet joint with spring**



Reference	Dimensions		Ean
VIA502	1/4"- 6 mm	10	5604612017408



# POWER GENERATORS



VIG38L

## Single-phase generator 3kVA



Find out more:

VIG65RL

## Single-phase generator with wheels and handle 6,5kVA



Find out more:

### Main features:

- > Manual engine start;
- > ON/OFF switch;
- > Protective circuit breaker;
- > Thermal protection for DC terminals;
- > Earth terminal;
- > LED light to display the operation status;
- > Automatic voltage regulator AVR.

### Technical data

Engine	4-ST combustion
Engine power	6.5 cv / 4.8 kW
Rated voltage - AC sockets	230 V - 50 Hz
Engine displacement	196 cc
No-load speed	3000 rpm
Fuel	Petrol 95
Running time	13 h
Fuel tank capacity	15 L
Maximum power	3 kVA
Rated current - AC sockets	12 A
Maximum power - AC sockets	2.7 kW
Rated power - AC sockets	2.5 kW
Rated voltage - DC terminals	12 V
Corrente de saída - terminais DC	8.3 A
Power factor (cos Ø)	1
Sound power level (LWA)	96 dB(A)
Weight	42 Kg
Dimensions	615 x 430 x 430 mm
Weight with packaging	43 Kg
Packaging dimensions	605 x 455 x 460 mm
Barcode	5604612642518

### Main features:

- > Manual engine start;
- > ON/OFF switch;
- > Protective circuit breaker;
- > Thermal protection for DC terminals;
- > Earth terminal;
- > LED light to display the operation status;
- > Automatic voltage regulator AVR.

### Technical data

Engine	4-ST combustion
Engine power	13 hp / 9.7 kW
Rated voltage - AC sockets	230 V - 50 Hz
Engine displacement	389 cc
No-load speed	3000 rpm
Fuel	Unleaded petrol 95
Running time	10 h
Fuel tank capacity	25 L
Maximum power	6.5 kVA
Rated current - AC sockets	22.7 A
Maximum power - AC sockets	5.5 kW
Rated power - AC sockets	5.0 kW
Rated voltage - DC terminals	12 V
Rated current - DC sockets	8.3 A
Power factor (cos Ø)	1
Sound power level (LWA)	95 dB(A)
Weight	80 Kg
Dimensions	700 x 510 x 630 mm
Weight with packaging	84 Kg
Packaging dimensions	835 x 560 x 530 mm
Barcode	5604612642525



Two single-phase sockets  
(230 V AC 50 Hz)



Display (voltage, frequency  
and hour meter)



Carrying handles



Two single-phase sockets  
(230 V AC 50 Hz)



Display (voltage, frequency  
and hour meter)



Folding carrying handles  
and wheels

### Packaging content

- > Spark plug wrench;
- > Single-phase plugs (x2).

### Packaging content

- > Wheels (x2);
- > Folding carrying handles (x2);
- > Set of screws;
- > Feet (x2);
- > Spark plug wrench;
- > Single-phase plugs (x2).

VIG8RL

## Single-phase generator with wheels and handle

### 8kVA



Find out more:

VIGD8ST

## Silent three-phase diesel generator 8kVA (Full Power)

**NEW**

Find out more:

#### Main features:

- > Manual/electric engine start;
- > Spark plug wrench;
- > Battery;
- > Protective circuit breaker;
- > Thermal protection for DC terminals;
- > Earth terminal;
- > LED light to display the operation status;
- > Automatic voltage regulator AVR.

#### Technical data

Engine	4-ST combustion
Engine power	15 cv / 11.2 kW
Rated voltage - AC sockets	230 V - 50 Hz
Rated voltage - three-phase sockets	-
Engine displacement	420 cc
No-load speed	3000 rpm
Fuel	Petrol 95
Running time	8 h
Fuel tank capacity	25 L
Maximum power	8 kVA
Rated current - AC sockets	29.5 A
Maximum power - AC sockets	6.5 kW
Rated power - AC sockets	6.0 kW
Rated voltage - DC terminals	12 V
Rated current - DC terminals	8.3 A
Power factor (cos Ø)	1
Sound power level (LWA)	96 dB(A)
Weight	88 Kg
Dimensions	700 x 510 x 630 mm
Weight with packaging	92 Kg
Packaging dimensions	825 x 535 x 560 mm
Barcode	5604612682422



Two single-phase sockets (230 V AC 50 Hz)



Display (voltage, frequency and hour meter)



Folding carrying handles and wheels

#### Packaging content

- > Wheels (x2);
- > Folding carrying handles (x2);
- > Set of screws;
- > Feet (x2);
- > Spark plug wrench;
- > Single-phase plugs (x2).

#### Main features:

- > Full power on single-phase socket;
- > Electric engine start;
- > Spark plug wrench;
- > Battery;
- > Protective circuit breaker;
- > Thermal protection for DC terminals;
- > Oil level alert LED light;
- > Automatic voltage regulator AVR.

#### Technical data


Engine	4-ST combustion
Engine power	12 cv / 8.5 kW
Rated voltage - AC sockets	230 V - 50 Hz
Rated voltage - three-phase sockets	400V AC 50Hz
Engine displacement	498 cc
No-load speed	3600 rpm
Fuel	Diesel
Running time	8 h
Fuel tank capacity	16 L
Maximum power	8 kVA
Rated current - AC sockets	26 A
Maximum power - AC sockets	6.5 kW
Rated power - AC sockets	6.0 kW
Rated voltage - DC terminals	12 V
Rated current - DC terminals	8.3 A
Power factor (cos Ø)	0.8
Sound power level (LWA)	69 dB(A)
Weight	155 kg
Dimensions	900 x 520 x 650 mm
Weight with packaging	163 kg
Packaging dimensions	950 x 545 x 815 mm
Barcode	5604612717414



Two single-phase sockets (230 V AC 50 Hz)



ATS panel connection



Lifting hook

#### Packaging content

- > Wheels (x4);
- > Set of screws;
- > Spark plug wrench;
- > Single-phase plugs (x2).

Accessories Page 106

## Overview

### Single-phase generators



Technical data	VIG38L	VIG65RL	VIG8RL
Engine	4-ST combustion	4-ST combustion	4-ST combustion
Engine power	6.5 cv / 4,8 kW	13 hp / 9.7 kW	15 cv / 11.2 kW
Engine displacement	196 cc	389 cc	420 cc
No-load speed	3000 rpm	3000 rpm	3000 rpm
Fuel	Petrol 95	Petrol 95	Petrol 95
Running time	13 hours	10 hours	8 hours
Fuel tank capacity	15 L	25 L	25 L
Engine oil	15W-40	15W-40	15W-40
Engine oil crankcase capacity	1.1 L	1.1 L	1.1 L
Engine start	Manual	Manual	Manual/electric
Generator	Single-phase	Single-phase	Single-phase
Maximum power	3 kVA	6.5 kVA	8 kVA
Rated voltage - AC sockets	230 V - 50 Hz	230 V - 50 Hz	230 V - 50 Hz
Rated current - AC sockets	12 A	22.7 A	29.5 A
Maximum power - AC sockets	2.7 kW	5.5 kW	6.5 kW
Rated power - AC sockets	2.5 kW	5.0 kW	6.0 kW
Rated voltage - DC terminals	12 V	12 V	12 V
Rated current - DC sockets	8.3 A	8.3 A	8.3 A
Power factor (cos Ø)	1	1	1
Maximum operating temperature	40 °C	40 °C	40 °C
Maximum operating altitude	1000 metres	1000 metres	1000 metres
ON/OFF switch	✓	✓	-
Ignition key	-	-	✓
Protective circuit breaker	✓	✓	✓
Thermal protection for DC terminals	✓	✓	✓
Earth terminal	✓	✓	✓
LED light to display the operation status	✓	✓	✓
Oil level alert LED light	-	-	-
Display	✓	✓	✓
Automatic voltage regulator AVR	✓	✓	✓
Battery	-	-	✓
Decompression valve	-	-	-
Soundproof structure	-	-	-
Lifting hook	-	-	-
IP code	IP23M	IP23M	IP23M
Insulation class	I	I	I
Sound pressure level (LpA)	94 dB(A)	75 dB(A)	76 dB(A)
Sound power level (LWA)	96 dB(A)	95 dB(A)	96 dB(A)
Weight	42 Kg	80 Kg	88 Kg
Dimensions	615 x 430 x 440 mm	700 x 510 x 630 mm	700 x 510 x 630 mm
Weight with packaging	43 Kg	84 Kg	92 Kg
Packaging dimensions	605 x 455 x 460 mm	835 x 560 x 530 mm	825 x 535 x 960

#### Packaging content

Wheels	-	✓	✓
Foldable carrying handles	-	✓	✓
Screws kit	-	✓	✓
Feet	-	✓	✓
Spark plug wrench	✓	✓	✓
Single-phase plugs	✓	✓	✓



VIG8TRL

## Three-phase generator with wheels and handle 8kVA



Find out more:



### Main features:

- › Manual/electric engine start;
- › ON/OFF switch;
- › Battery;
- › Protective circuit breaker;
- › Thermal protection for DC terminals;
- › Earth terminal;
- › LED light to display the operation status;
- › Automatic voltage regulator AVR.



Single-phase - 230 V AC  
50 Hz - Three-phase - 480  
V AC 50 Hz



Display (voltage,  
frequency and hour meter)



Folding carrying handles  
and wheels

### Packaging content

- › Wheels (x2);
- › Folding carrying handles (x2);
- › Set of screws;
- › Feet (x2);
- › Spark plug wrench;
- › Single-phase plug + three-phase plug.

### Technical data

Engine	4-ST combustion
Engine power	15 hp / 11.2 kW
Engine displacement	420 cc
Rated voltage - AC sockets	230 V - 50 Hz
Rated voltage - three-phase sockets	400V AC 50Hz
No-load speed	3000 rpm
Fuel	Petrol 95
Running time	8 h
Fuel tank capacity	25 L
Maximum power	8 kVA
Rated current - AC sockets	16 A / Fase
Maximum power - AC sockets	2.2 / 6.5 kW
Rated power - AC sockets	2.0 / 6.0 kW
Rated voltage - DC terminals	12 V
Rated current - DC sockets	8.3 A
Power factor (cos $\phi$ )	0.8
Sound power level (LWA)	96 dB(A)
Weight	85 Kg
Dimensions	700 x 510 x 630 mm
Weight with packaging	92 Kg
Packaging dimensions	825 x 535 x 560 mm
Barcode	5604612696023

Accessories Page 106

VIGI1250

## Inverter generator 1250



Find out more:

VIGI2000

## Inverter generator 2000



Find out more:

### Main features:

- > Manual engine start;
- > Thermal protection for DC terminals;
- > Earth terminal;
- > LED light to display the operation status;
- > ESC (Economy speed control) mode, lower consumption at low load;
- > Inverter technology ensures 100% stable voltage.

### Technical data

Engine	4-ST combustion
Engine power	1.5 cv / 1.1 kW
Rated voltage - AC sockets	230 V - 50 Hz
Engine displacement	60 cc
No-load speed	4800 rpm
Fuel	Petrol 95
Running time at 50%	5.2 h
Running time at 100%	3.5 h
Fuel tank capacity	2.6 L
Maximum power	1.2 kVA
Rated current - AC sockets	4.3 A
Maximum power - AC sockets	1 kW
Rated power - AC sockets	1 kW
Rated voltage - DC terminals	12 V
Rated current - DC sockets	5 A
Power factor (cos Ø)	1
Sound power level (LWA)	89 dB(A)
Weight	13.5 kg
Dimensions	450 x 240 x 385 mm
Weight with packaging	15 kg
Packaging dimensions	465 x 285 x 415 mm
Barcode	5604612703110

### Main features:

- > Manual engine start;
- > Thermal protection for DC terminals;
- > Earth terminal;
- > LED light to display the operation status;
- > ESC (Economy speed control) mode, lower consumption at low load;
- > Inverter technology ensures 100% stable voltage.

### Technical data

Engine	4-ST combustion
Engine power	2.4 cv / 1.8 kW
Rated voltage - AC sockets	230 V - 50 Hz
Engine displacement	79.7 cc
No-load speed	4500 rpm
Fuel	Petrol 95
Running time at 50%	6 h
Running time at 100%	3.6 h
Fuel tank capacity	4 L
Maximum power	2.0 kVA
Rated current - AC sockets	7.0 A
Maximum power - AC sockets	2 kW
Rated power - AC sockets	1.6 kW
Rated voltage - DC terminals	12 V
Rated current - DC sockets	8.3 A
Power factor (cos Ø)	1
Sound power level (LWA)	90 dB(A)
Weight	22 kg
Dimensions	498 x 290 x 459 mm
Weight with packaging	24 kg
Packaging dimensions	520 x 295 x 490 mm
Barcode	5604612703127



Carrying handle



ESC switch (electronic speed control)



Can be connected in parallel



Carrying handle



ESC switch (electronic speed control)



Can be connected in parallel

### Packaging content

- > DC output cable;
- > Set of keys;
- > Single-phase plug (x1).

Accessories Page 106

### Packaging content

- > DC output cable;
- > Set of keys;
- > Single-phase plug (x1).

Accessories Page 106



VIGI3000

## Inverter generator 3000

**NEW**



Find out more:



### Main features:

- > Electric start;
- > Thermal protection for DC terminals;
- > Earth terminal;
- > Operation warning indicator lights;
- > ESC (Economy speed control) mode, lower consumption at low load;
- > Inverter technology ensures 100% stable voltage.



Ergonomic carrying handle



ESC switch (electronic speed control)



Can be connected in parallel

### Packaging content

- > DC output cable;
- > Set of keys;
- > Oil funnel;
- > 16A plug;

Accessories Page 106

### Technical data

Engine	4-ST combustion
Engine power	5.8 cv / 4.3 kW
Engine displacement	212 cc
Rated voltage - AC sockets	230 V - 50 Hz
No-load speed	3600 rpm
Fuel	Petrol 95
Running time at 50%	8.5 h
Running time at 100%	5 h
Fuel tank capacity	8.3 L
Maximum power	3.5 kVA
Rated current - AC sockets	15.2 A
Maximum power - AC sockets	3.5 kW
Rated power - AC sockets	3.2 kW
Rated voltage - DC terminals	12 V
Rated current - DC sockets	8.3 A
Power factor (cos $\theta$ )	1
Sound power level (LWA)	95 dB(A)
Weight	45 kg
Dimensions	590 x 456 x 511 mm
Weight with packaging	44 kg
Packaging dimensions	595 x 460 x 520 mm
Barcode	5604612717322

VIGD10STA

## Super silent three-phase diesel generator 10kVA



Find out more:

VIGD15STA

## Super silent three-phase diesel generator 15kVA



Find out more:

### Main features:

- > Automatic voltage regulator AVR;
- > Automatic control system and electric start;
- > High efficiency industrial silencer and flexible bellows.

### Technical data

Standby power (STP)	11 kVA / 8.8 kW
Prime power (PRP)	10 kVA / 8 kW
Output voltage	230 V - 50 Hz 400V AC 50Hz
Rated output current	15.1 A
Power factor (cos Ø)	0.8
Fuel	Diesel
Engine displacement	1.36 L
Fuel tank capacity	40 L
Running time	8 H
Sound power level (LWA)	80 dB(A)
Weight	520 kg
Dimensions	1530 x 760 x 1050 mm
Barcode	5604612694883

### Main features:

- > Automatic voltage regulator AVR;
- > Automatic control system and electric start;
- > High efficiency industrial silencer and flexible bellows.

### Technical data

Standby power (STP)	16.5 kVA/ 13.2 kW
Prime power (PRP)	15 kVA / 12 kW
Output voltage	230 V - 50 Hz 400V AC 50Hz
Rated output current	22.7 A
Power factor (cos Ø)	0.8
Fuel	Diesel
Engine displacement	1.81 L
Fuel tank capacity	50 L
Running time	8 H
Sound power level (LWA)	80 dB(A)
Weight	720 kg
Dimensions	1840 x 850 x 1100 mm
Barcode	5604612694890



Multifunction control panel



Connection terminals

Accessories Page 106



Multifunction control panel



Connection terminals

Accessories Page 106



VIGD20STA

## Super silent three-phase diesel generator 20kVA



Find out more:

VIGD30ST

## Super silent three-phase diesel generator 30kVA

NEW



Find out more:

### Main features:

- > Automatic voltage regulator AVR;
- > Automatic control system and electric start;
- > High efficiency industrial silencer and flexible bellows.

### Technical data

Standby power (STP)	22 kVA/ 17.6 kW
Prime power (PRP)	20 kVA/ 16 kW
Output voltage	230 V - 50 Hz 400V AC 50Hz
Rated output current	30.3 A
Power factor (cos Ø)	0.8
Fuel	Diesel
Engine displacement	2.54 L
Fuel tank capacity	50 L
Running time	8 H
Sound power level (LWA)	80 dB(A)
Weight	760 kg
Dimensions	1840 x 850 x 1100 mm
Barcode	5604612694906



Multifunction control panel



Connection terminals

[Accessories Page 106](#)

### Main features:

- > Automatic voltage regulator AVR;
- > Automatic control system and electric start;
- > High efficiency industrial silencer and flexible bellows.

### Technical data

Standby power (STP)	33 kVA / 26.4 kW
Prime power (PRP)	30 kVA / 24 kW
Output voltage	230 V AC 50 Hz 400 V AC 50 Hz
Rated output current	43 A
Power factor (cos Ø)	0.8
Fuel	Diesel
Engine displacement	3.707 L
Fuel tank capacity	80 L
Running time	13 H
Sound power level (LWA)	80 dB(A)
Weight	950 kg
Dimensions	2140 x 850 x 1150 mm
Barcode	5604612717698



Multifunction control panel



Connection terminals

[Accessories Page 106](#)

VIGD40ST

## Super silent three-phase diesel generator 40kVA

**NEW**



Find out more:

VIGD50ST

## Super silent three-phase diesel generator 50kVA

**NEW**



Find out more:

### Main features:

- > Automatic voltage regulator AVR;
- > Automatic control system and electric start;
- > High efficiency industrial silencer and flexible bellows.

### Technical data

Standby power (STP)	44kVA/ 35.2 kW
Prime power (PRP)	40kVA/ 32 kW
Output voltage	230 V - 50 Hz 400V AC 50Hz
Rated output current	61 A
Power factor (cos Ø)	0.8
Fuel	Diesel
Engine displacement	4.484 L
Fuel tank capacity	100 L
Running time	10 H
Sound power level (LWA)	80 dB(A)
Weight	1100 kg
Dimensions	2270 x 1000 x 1300 mm
Barcode	5604612717704

### Main features:

- > Automatic voltage regulator AVR;
- > Automatic control system and electric start;
- > High efficiency industrial silencer and flexible bellows.

### Technical data

Standby power (STP)	55kVA/ 44 kW
Prime power (PRP)	55kVA/ 44 kW
Output voltage	230 V - 50 Hz 400V AC 50Hz
Rated output current	71 A
Power factor (cos Ø)	0.8
Fuel	Diesel
Engine displacement	3.875 L
Fuel tank capacity	100 L
Running time	10 H
Sound power level (LWA)	80 dB(A)
Weight	1150 kg
Dimensions	2270 x 1000 x 1300 mm
Barcode	5604612717711



Multifunction control panel



Connection terminals

Accessories Page 106



Multifunction control panel



Connection terminals

Accessories Page 106



VIGD100ST

## Super silent three-phase diesel generator 100kVA

**NEW**



Find out more:



### Main features:

- > Automatic voltage regulator AVR;
- > Automatic control system and electric start;
- > High efficiency industrial silencer and flexible bellows.



Multifunction control panel



Connection terminals

Accessories Page 106

### Technical data

Standby power (STP)	110 kVA/ 44 kW
Prime power (PRP)	100 kVA/ 44 kW
Output voltage	230 V - 50 Hz 400V AC 50Hz
Rated output current	144 A
Power factor (cos $\emptyset$ )	0.8
Fuel	Diesel
Engine displacement	3.900 L
Fuel tank capacity	200 L
Running time	8 H
Sound power level (LWA)	80 dB(A)
Weight	1600 kg
Dimensions	2675 x 1075 x 1620 mm
Barcode	5604612725365

## Accessories for generators

### ATS panel for 5-8kVA generator



Reference		Ean
VIATS58	<b>NEW</b>	5604612723446

### Parallel connection cable



> Compatible with inverter generator 1250 and 2000.

Reference		Ean
VIGICP	<b>NEW</b>	5604612706463

### Parallel connection box



> Compatible with all inverter generators.

Reference		Ean
VIGICP3000	<b>NEW</b>	5604612717834

### ATS panel for generator



Reference		kVA's	Ean
VIGDSTA.ATS1020	<b>NEW</b>	10   15   20	5604612717391
VIGDSTA.ATS30	<b>NEW</b>	30	5604612717766
VIGDSTA.ATS4050	<b>NEW</b>	40   50	5604612717759
VIGDSTA.ATS100	<b>NEW</b>	100	5604612725501

# WELDING EQUIPMENT



VIAS160

## Welding machine 160A



Find out more:

VIAS200

## Welding machine 200A



Find out more:

### Main features:

- > Ventilation system;
- > Thermal overload protection;
- > Suitable for industrial use.

### Technical data

Rated voltage	8 kVA
Mains voltage	230 V - 50 Hz
Efficiency	60%
Power factor (cos Ø)	1
Type of welding	Arc welding
Electrode diameter	2 - 4 mm
Insulation class	H
IP code	IP21S
Weight	21.1 Kg
Dimensions	550 x 245 x 400 mm
Weight with packaging	22 Kg
Packaging dimensions	475 x 265 x 310 mm
Barcode	5604612642495

### Main features:

- > Ventilation system;
- > Thermal overload protection;
- > Suitable for industrial use.

### Technical data

Rated voltage	11.2 kVA
Mains voltage	230 V - 50 Hz
Efficiency	60%
Power factor (cos Ø)	1
Type of welding	Arc welding
Electrode diameter	2 - 4 mm
Insulation class	H
IP code	IP21S
Weight	20.7 Kg
Dimensions	550 x 245 x 400 mm
Weight with packaging	22 Kg
Packaging dimensions	475 x 265 x 310 mm
Barcode	5604612642150



Selection of supply voltage



Duty cycle / electrode diameter



Included accessories



Selection of supply voltage



Duty cycle / electrode diameter



Included accessories

### Packaging content

- > Wheels (x2);
- > Hand held welding mask;
- > Earth clamp;
- > Electrode holder;
- > Wire brush/chipping hammer.

Accessories Page 113

### Packaging content

- > Wheels (x2);
- > Hand held welding mask;
- > Earth clamp;
- > Electrode holder;
- > Wire brush/chipping hammer.

Accessories Page 113

VIMSF100

## Flux-cored welding machine 100A



Find out more:

VII140B

## Inverter welder 140A - 43kVA

**NEW**

Find out more:

### Main features:

- > Ventilation system;
- > Thermal overload protection;
- > Welds without a shielding gas;
- > Wire feed speed controller.

### Technical data

Rated voltage	3.6 kVA
Mains voltage	230 V - 50 Hz
Welding current	50 - 100 A
Duty cycle (230 V)	10% - 100 A
Fuse	16 A
Power factor (cos $\phi$ )	0.7
Adjustment positions	4
Welding wire spool (maximum)	1 kg
Welding wire diameter	0.6 - 0.9 mm
Earth clamp cable length	1.5 m
Welding gun cable length	1.9 m
Power cord length	1.8 m
Insulation class	H
IP code	IP21S
Weight	12.4 kg
Dimensions	345 x 430 x 185 mm
Weight with packaging	13.9 kg
Packaging dimensions	465 x 225 x 395 mm
Barcode	5604612705855



Wire feed speed controller



Carrying handle



Included accessories

### Packaging content

- > Hand held welding mask;
- > Wire spool;
- > Hand held welding mask;
- > Wire brush/chipping hammer.

Accessories Page 113

### Main features:

- > Ventilation system;
- > Thermal overload protection;
- > Compatible with generators (power > 4.3 kVA).

### Technical data

Rated voltage	4.3 kVA
Mains voltage	230 V - 50 Hz
Welding current	20 - 140 A
Duty cycle (230 V)	100% - 85 A
Duty cycle (230 V)	60% - 140 A
No-load voltage	62 V
Efficiency	85 %
Power factor (cos $\phi$ )	0.93
Type of welding	MMA
Terminals diameter	9.2 mm
Electrode diameter	1.6 - 3.2 mm
Insulation class	F
IP code	IP21S
Weight	3.0 Kg
Dimensions	280 x 120 x 200 mm
Weight with packaging	5.0 kg
Packaging dimensions	360 x 160 x 320 mm
Barcode	5604612718077



Digital display - accurate amperage adjustment



Included accessories

### Packaging content

- > Carrying handle;
- > Hand held welding mask;
- > Earth clamp;
- > Electrode holder;
- > Wire brush/chipping hammer.

Accessories Page 113





**VITO**  
PRO POWER

VITO PRO POWER  
120.5A  
WEL

258A  
WEL



VII150A

## Inverter welder

### 150A - 43kVA

**NEW**

W/EL



Find out more:

#### Main features:

- > Ventilation system;
- > Thermal overload protection;
- > Compatible with generators (power > 4.3 kVA).

#### Technical data

Rated voltage	4.3 kVA
Mains voltage	230 V - 50 Hz
Welding current	20 - 150 A
Duty cycle (230 V)	100% - 108 A
Duty cycle (230 V)	60% - 150 A
No-load voltage	62 V
Efficiency	85 %
Power factor (cos Ø)	0.93
Type of welding	MMA, LIFT TIG
Terminals diameter	9.2 mm
Electrode diameter	1.6 - 4 mm
Insulation class	F
IP code	IP21S
Weight	4.7 Kg
Dimensions	140 x 330 x 230 mm
Weight with packaging	8 Kg
Packaging dimensions	400x 330 x 270 mm
Barcode	5604612711986



Digital display - accurate amperage adjustment



Carrying handle



Included accessories

#### Packaging content

- > Carrying handle;
- > Hand held welding mask;
- > Earth clamp;
- > Electrode holder;
- > Wire brush/chipping hammer.



Accessories Page 113, 149

VII170

## Inverter welder

### 170A - 43kVA

**NEW**

W/EL



Find out more:

#### Main features:

- > Ventilation system;
- > Thermal overload protection;
- > Compatible with generators (power > 4.3 kVA).

#### Technical data

Rated voltage	4.9 kVA
Mains voltage	230 V - 50 Hz
Welding current	20 - 170 A
Duty cycle (230 V)	100% - 131 A
Duty cycle (230 V)	60% - 170 A
No-load voltage	65 V
Efficiency	85 %
Power factor (cos Ø)	0.93
Type of welding	MMA, LIFT TIG
Terminals diameter	9.2 mm
Electrode diameter	1.6 - 4 mm
Insulation class	F
IP code	IP21S
Weight	5 Kg
Dimensions	140 x 330 x 245 mm
Weight with packaging	8.6Kg
Packaging dimensions	400 x 330 x 270 mm
Barcode	5604612711993



Digital display - accurate amperage adjustment



Carrying handle



Included accessories

#### Packaging content

- > Carrying handle;
- > Hand held welding mask;
- > Earth clamp;
- > Electrode holder;
- > Wire brush/chipping hammer.



Accessories Page 113, 149

VII200B

## Inverter welder 200A - 6.8 kVA

**NEW**



Find out more:

VII250A

## Inverter welder 250A - 7.8 kVA

**NEW**



Find out more:

### Main features:

- > Ventilation system;
- > Thermal overload protection;
- > Compatible with generators (power > 6.8 kVA).

### Technical data

Rated voltage	6.8 kVA
Mains voltage	230 V - 50 Hz
Welding current	20 - 200 A
Duty cycle (230 V)	100% - 155 A
Duty cycle (230 V)	60% - 200 A
No-load voltage	65 V
Efficiency	88 %
Power factor (cos Ø)	0.93
Type of welding	MMA, LIFT TIG
Terminals diameter	9.2 mm
Electrode diameter	1,6 - 5 mm
Insulation class	F
IP code	IP21S
Weight	5.2 Kg
Dimensions	140 x 330 x 250 mm
Weight with packaging	8.8 Kg
Packaging dimensions	400 x 330 x 270 mm
Barcode	5604612712006

### Main features:

- > Ventilation system;
- > Thermal overload protection;
- > Compatible with generators (power > 7.8 kVA).

### Technical data

Rated voltage	7.8 kVA
Mains voltage	230 V - 50 Hz
Welding current	20 - 250 A
Duty cycle (230 V)	100% - 193 A
Duty cycle (230 V)	60% - 250 A
No-load voltage	65 V
Efficiency	85 %
Power factor (cos Ø)	0.93
Type of welding	MMA, LIFT TIG
Terminals diameter	12.5 mm
Electrode diameter	1.6 - 5 mm
Insulation class	F
IP code	IP21S
Weight	6.6 Kg
Dimensions	160 x 410 x 300 mm
Weight with packaging	10.2 Kg
Packaging dimensions	485 x 290 x 370 mm
Barcode	5604612712013



Digital display - accurate amperage adjustment



Carrying handle



Included accessories



Digital display - accurate amperage adjustment



Carrying handle



Included accessories

### Packaging content

- > Carrying handle;
- > Hand held welding mask;
- > Earth clamp;
- > Electrode holder;
- > Wire brush/chipping hammer.



### Packaging content

- > Hand held welding mask;
- > Earth clamp;
- > Electrode holder;
- > Wire brush/chipping hammer;



Accessories Page 113, 149

Accessories Page 113, 149



## Accessoires pour soudure

### Lift tig welding torch for inverter welder 92 mm

**NEW**



- > Compatible with LIFT TIG welding machines;
- > Compatible models: VII150A, VII170 and VII200B;
- > Cable length: 3 metres.

Reference	Electrodes size	Ean
VITLTIG92	1.6 , 2 e 2.4mm	5604612715748

### Lift tig welding torch for inverter welder 125mm

**NEW**



- > Compatible with LIFT TIG welding machines;
- > Compatible models: VII250A;
- > Cable length: 3 metres.

Reference	Electrodes size	Ean
VITLTIG125	1.6 , 2 e 2.4mm	5604612715755

### Flux-cored wire spool 0,6 mm

**NEW**



- > Compatible with flux-cored welding machines;
- > Compatible models: VIMSF100.

Reference	Weight	Ean
VIMSF.06045	0.45 kg	5604612709617
VIMSF.061	1 kg	5604612709624

### Flux-cored wire spool 0,9 mm

**NEW**



- > Compatible with flux-cored welding machines;
- > Compatible models: VIMSF100.

Reference	Weight	Ean
VIMSF.09045	0.45 kg	5604612709648
VIMSF.091	1 kg	5604612709631

## Overview

### Inverter welders



Technical data	VII140B	VII150A	VII170	VII200B	VII250A
Rated voltage	4.3 kVA	4.3 kVA	4.9 kVA	6.8 kVA	7.8 kVA
Welding current	20 - 140 A	20 - 150 A	20 - 170 A	20 - 200 A	20 - 250 A
Duty cycle (230 V)	100% - 85 A	100% - 108 A	100% - 131 A	100% - 155 A	100% - 193 A
Duty cycle (230 V)	60% - 140 A	60% - 150 A	60% - 170 A	60% - 200 A	60% - 250 A
No-load voltage	62 V	65 V	65 V	65 V	65 V
Efficiency	85 %	85% %	85% %	85% %	85% %
Power factor (cos Ø)	0.93	0.93	0.93	0.93	0.93
Type of welding	MMA	MMA, LIFT MIG	MMA, LIFT MIG	MMA, LIFT MIG	MMA, LIFT MIG
Terminals diameter	9.2 mm	9.2 mm	9.2 mm	9.2 mm	12.5 mm
Electrode diameter	1.6 - 3.2 mm	1.6 - 4 mm	1.6 - 4 mm	1.6 - 5 mm	1.6 - 5 mm
Insulation class	F	F	F	F	F
IP code	IP21S	IP21S	IP21S	IP21S	IP21S
Mains voltage	230 V - 50 Hz	230 V - 50 Hz	230 V - 50 Hz	230 V - 50 Hz	230 V - 50 Hz
Power cord length	2 m	1.6 m	1.6 m	1.6 m	1.3 m
Earth clamp cable length	1.2 m	1.7 m	1.7 m	1.7 m	1.7 m
Electrode holder cable length	1.4 m	1.7 m	1.7 m	1.7 m	1.7 m
Thermal protection	✓	✓	✓	✓	✓
Ventilation	✓	✓	✓	✓	✓
Digital display	✓	✓	✓	✓	✓
Carrying case	BMC	Aluminium	Aluminium	Aluminium	Aluminium
Weight	3.0 Kg	4.7 Kg	5 kg	5.2 Kg	6.6 Kg
Dimensions	280 x 120 x 200 mm	140 x 330x 230 mm	140 x 330 x 245 mm	140 x 330 x 250 mm	160 x 410 x 300 mm
Weight with packaging	5.0 Kg	8 Kg	8.6 Kg	8.8 Kg	10.2 Kg
Packaging dimensions	360 x 160 x 320 mm	400 x 330 x 270 mm	400 x 330 x 270 mm	400 x 330 x 270 mm	485 x 290 x 370 mm

#### Packaging content

Carrying handle	✓	✓	✓	✓	✓
Hand held welding mask	✓	✓	✓	✓	✓
Earth clamp	✓	✓	✓	✓	✓
Electrode holder	✓	✓	✓	✓	✓
Wire brush/chipping hammer	✓	✓	✓	✓	✓

# HIGH PRESSURE WASHERS AND ACCESSORIES



VIML115WR1

## High pressure washer 115bar

WR



Find out more:

VIML130WR2LITE

## High pressure washer 130 bar

WR



Find out more:

### Main features:

- > Aluminium carbon brush motor;
- > Aluminium pump body and head;
- > 5-meter PVC hose;
- > Carrying handle;
- > Adjustable stop and jet.

### Technical data

Rated voltage	1300 W
Mains voltage	230 V - 50 Hz
Maximum inlet water pressure	7 bar
Maximum pressure	115 bar
Operating pressure	80 bar
Maximum flow rate	6.5 L/min
Operating flow rate	5.5 L/min
Power cord length	5 m
IP code	IPX5
Sound power level (LWA)	92 dB(A)
Weight	5.7 Kg
Dimensions	320 x 300 x 740 mm
Weight with packaging	7.9 Kg
Packaging dimensions	385 x 280 x 470 mm
Barcode	5604612692582

### Main features:

- > Aluminium carbon brush motor;
- > Aluminium pump body and head;
- > 5-meter PVC hose;
- > Telescopic carrying handle;
- > Adjustable stop and jet.

### Technical data

Rated voltage	1600 W
Mains voltage	230 V - 50 Hz
Maximum inlet water pressure	7 bar
Maximum pressure	130 bar
Operating pressure	90 bar
Maximum flow rate	6.7 L/min
Operating flow rate	5.8 L/min
Power cord length	5 m
IP code	IPX5
Sound power level (LWA)	89 dB(A)
Weight	10.3 Kg
Dimensions	370 x 410 x 870
Weight with packaging	12.4 kg
Packaging dimensions	400 x 363 x 718 mm
Barcode	5604612710422



Water inlet filter



Wheels



Hose holder



1.2 L detergent tank



Detergent dosing button



Hose holder

### Packaging content

- > Trigger gun;
- > Lance with spray nozzle;
- > High pressure PVC hose;
- > Holder for set (gun + lance);
- > Power cord holder;
- > High pressure hose holder;
- > Carrying handle;
- > Water inlet filter;
- > Set of fixing bolts;
- > Cleaning needle for nozzle.

### Packaging content

- > Trigger gun;
- > Lance with spray nozzle;
- > High pressure PVC hose;
- > Holder for set (gun + lance);
- > High pressure hose holder;
- > Accessories holder (x2);
- > Water inlet filter;
- > Set of fixing bolts;
- > Cleaning needle for nozzle.

Accessories Page 120

VIML130WR2

## High pressure washer 130 bar



WR



Find out more:

VIML150WR3

## High pressure washer 150bar



WR



Find out more:

### Main features:

- > Aluminium induction motor;
- > Aluminium pump body and head;
- > 5-meter PVC hose;
- > Telescopic carrying handle;
- > Adjustable stop and jet.

### Technical data

Rated voltage	1800 W
Mains voltage	230 V - 50 Hz
Maximum inlet water pressure	7 bar
Maximum pressure	130 bar
Operating pressure	95 bar
Maximum flow rate	6.5 L/min
Operating flow rate	5.2 L/min
Power cord length	5 m
IP code	IPX5
Sound power level (LWA)	86 dB(A)
Weight	15 Kg
Dimensions	360 x 370 x 870 mm
Weight with packaging	17.8 Kg
Packaging dimensions	400 x 365 x 720 mm
Barcode	5604612692599



1.2 L detergent tank



Detergent dosing button



Hose holder

### Packaging content

- > Trigger gun;
- > Lance with spray nozzle;
- > High pressure PVC hose;
- > Holder for set (gun + lance);
- > High pressure hose holder;
- > Accessories holder (x2);
- > WR adaptor - for accessories;
- > Water inlet filter;
- > Set of fixing bolts;
- > Cleaning needle for nozzle.

Accessories Page 120

### Main features:

- > Copper induction motor;
- > Aluminium pump body and head;
- > 5-meter PVC hose;
- > Telescopic carrying handle;
- > Adjustable stop and jet.

### Technical data

Rated voltage	2000 W
Mains voltage	230 V - 50 Hz
Maximum inlet water pressure	7 bar
Maximum pressure	150 bar
Operating pressure	115 bar
Maximum flow rate	7.5 L/min
Operating flow rate	6.3 L/min
Power cord length	5 metres
IP code	IPX5
Sound power level (LWA)	85,2 dB(A)
Weight	17 Kg
Dimensions	400 x 370 x 880 mm
Weight with packaging	20.2 Kg
Packaging dimensions	400 x 365 x 795 mm
Barcode	5604612692605



1.2 L detergent tank



Detergent dosing button



Built-in hose reel

### Packaging content

- > Trigger gun;
- > Lance with spray nozzle;
- > Turbo lance with spray nozzle;
- > High pressure PVC hose;
- > Holder for set (gun + lance);
- > High pressure hose holder;
- > Accessories holder (x2);
- > WR adaptor - for accessories;
- > Water inlet filter;
- > Set of fixing bolts;
- > Cleaning needle for nozzle.

## Overview

### High pressure washers WR



Technical data	VIML115WR1	VIML130WR2LITE	VIML130WR2	VIML150WR3
Mains voltage	230 V - 50 Hz	230 V - 50 Hz	230 V - 50 Hz	230 V - 50 Hz
Rated voltage	1300 W	1600 W	1800 W	2000 W
Maximum inlet water pressure	7 bar	7 bar	7 bar	7 bar
Maximum pressure	115 bar	130 bar	130 bar	150 bar
Operating pressure	80 bar	90 bar	95 bar	115 bar
Maximum flow rate	6.5 L/min	6.7 L/min	6.5 L/min	7.5 L/min
Operating flow rate	5.5 L/min	5.8 L/min	5.2 L/min	6.3 L/min
Type of motor	Carbon brushes	Carbon brushes	Induction	Induction
Motor material	Aluminium	Aluminium	Aluminium	Copper
Pump body material	Aluminium	Aluminium	Aluminium	Aluminium
Pump head material	Aluminium	Aluminium	Aluminium	Aluminium
Hose length	5 metres	5 metres	5 metres	5 metres
Braided hose	-	-	-	-
Power cord length	5 metres	5 metres	5 metres	5 metres
Operating temperature	5 - 50 °C	5 - 50 °C	5 - 50 °C	5 - 50 °C
Automatic stop	✓	✓	✓	✓
Adjustable jet	✓	✓	✓	✓
Detergent tank	-	✓	✓	✓
Detergent flow adjustment	-	✓	✓	✓
Adjustable carrying handle	-	✓	✓	✓
Hose reel	-	-	-	✓
IP code	IPX5	IPX5	IPX5	IPX5
Insulation class	II	II	I	I
Lance vibration (ah)	1.8 m/s <sup>2</sup> , k = 1.5	1.8 m/s <sup>2</sup> , k = 1.5	2.13 m/s <sup>2</sup> , k = 1.5	2.13 m/s <sup>2</sup> , k = 1.5
Sound pressure level (LpA)	75 dB(A)	74 dB(A)	70 dB(A)	68 dB(A)
Sound power level (LWA)	92 dB(A)	89 dB(A)	86 dB(A)	85 dB(A)
Weight	5.7 Kg	10.3 Kg	15 Kg	17 Kg
Dimensions	320 x 300 x 740 mm	370 x 410 x 870	360 x 370 x 870 mm	400 x 370 x 880 mm
Weight with packaging	7.9 Kg	12.4 Kg	17.8 Kg	20.2 Kg
Packaging dimensions	385 x 280 x 470 mm	400 x 363 x 718 mm	400 x 365 x 720 mm	400 x 365 x 795 mm

#### Packaging content

Trigger gun	✓	✓	✓	✓
Lance with spray nozzle	✓	✓	✓	✓
High pressure PVC hose	✓	✓	✓	✓
Steel armed hose	-	-	-	-
Turbo lance with spray nozzle	-	-	-	✓
Holder for set (gun + lance)	✓	✓	✓	✓
Power cord holder	✓	✓	✓	✓
High pressure hose holder	✓	✓	✓	✓
Accessories adaptor	-	-	✓	✓
Water inlet filter	✓	✓	✓	✓
Set of fixing bolts	✓	✓	✓	✓
Cleaning needle for nozzle	✓	✓	✓	✓





VIML180WR4

## High pressure washer

180bar

WR



Find out more:



### Main features:

- > Copper induction motor;
- > Aluminium pump body, brass head;
- > 10m steel armed hose;
- > Carrying handle;
- > Adjustable stop and jet.



1.2 L detergent tank



Detergent dosing button



Built-in hose reel

### Packaging content

- > Trigger gun;
- > Lance with spray nozzle;
- > Turbo lance with spray nozzle;
- > Steel armed hose holder;
- > Holders for set (gun + lance) (x2);
- > Power cord holder;
- > WR adaptor - for accessories;
- > Water inlet filter;
- > Set of fixing bolts;
- > Cleaning needle for nozzle.

### Technical data

Rated voltage	3000 W
Mains voltage	230 V - 50 Hz
Maximum inlet water pressure	7 bar
Maximum pressure	180 bar
Operating pressure	140 bar
Maximum flow rate	9 L/min
Operating flow rate	7.5 L/min
Power cord length	5 metres
IP code	IPX5
Sound power level (LWA)	86 dB(A)
Weight	25 Kg
Dimensions	400 x 380 x 890 mm
Weight with packaging	28.1 Kg
Packaging dimensions	415 x 385 x 920 mm
Barcode	5604612692629

[Accessories Page 113, 149](#)

# Accessories for high pressure washers Water Power Revolution



VIMLWR024



VIMLWR020



VIMLWR022

Reference	Designation	Compatible with:		Ean
VIMLWR024	WR ADAPTOR	WR2, WR3, WR4	24	5604612693053
VIMLWR020	GUN	WR1, WR2LITE	10	5604612693015
VIMLWR022	GUN	WR2, WR3, WR4	10	5604612693039



VIMLWR001



VIMLWR002



VIMLWR003



VIMLWR004

Reference	Designation	Compatible with:		Ean
VIMLWR001	CAR WASHING BRUSH	WR1, WR2, WR3, WR4, WR2LITE	10	5604612692827
VIMLWR002	ROTARY WASHING BRUSH	WR1, WR2, WR3, WR4, WR2LITE	10	5604612692834
VIMLWR003	MULTIPURPOSE BRUSH	WR1, WR2, WR3, WR4, WR2LITE	10	5604612692841
VIMLWR004	FLOOR BRUSH	WR1, WR2, WR3, WR4, WR2LITE	2	5604612692858



VIMLWR021



VIMLWR023



VIMLWR0231



VIMLWR0232



VIMLWR006

Reference	Designation	Compatible with:		Ean
VIMLWR021	ADJUSTABLE LANCE	WR1, WR2LITE	12	5604612693022
VIMLWR023	METAL ADJUSTABLE LANCE	WR2	12	5604612693046
VIMLWR0231	METAL ADJUSTABLE LANCE	WR3	12	5604612694470
VIMLWR0232	METAL ADJUSTABLE LANCE	WR4	12	5604612694487
VIMLWR006	TURBO LANCE	WR3, WR4	12	5604612692872



VIMLWR005



VIMLWR011



VIMLWR008



VIMLWR009



VIMLWR010

Reference	Designation	Compatible with:		Ean
VIMLWR005	PLASTIC TURBO LANCE	WR1, WR2LITE	12	5604612692865
VIMLWR011	ROTATING TURBO LANCE	WR1, WR2LITE	12	5604612692926
VIMLWR008	45° LANCE	WR1, WR2, WR3, WR2LITE	12	5604612692896
VIMLWR009	CURVED 315° LANCE	WR1, WR2, WR3, WR2LITE	12	5604612692902
VIMLWR010	METAL LANCE EXTENSION	WR1, WR2, WR2LITE	10	5604612692919



VIMLWR016



VIMLWR0161



VIMLWR0162



VIMLWR017



VIMLWR0163

Reference	Designation	Compatible with:		Ean
VIMLWR016	PVC EXTENSION HOSE - 5 M	WR1, WR2LITE	5	5604612692971
VIMLWR0161	PVC EXTENSION HOSE - 5 M	WR2	5	5604612693831
VIMLWR0162	PVC EXTENSION HOSE - 5 M	WR3	5	5604612694463
VIMLWR017	STEEL ARMED EXTENSION HOSE - 5 M	WR4	5	5604612692988
VIMLWR0163	PVC HOSE - 5 M	WR3	5	5604612709983



VIMLWR013

Reference	Designation	Compatible with:		Ean
VIMLWR013	PIPE CLEANING HOSE - 7.5 M	WR1, WR2, WR3, WR4, WR2LITE	5	5604612692940

VIML150HQA

## High pressure washer Powerwash 225bar



Find out more:

### Main features:

- > Aluminium induction motor;
- > Aluminium pump body, brass head;
- > 5m steel armed hose;
- > Adjustable stop and jet.

### Technical data

Rated voltage	3200 W
Mains voltage	230 V - 50 Hz
Maximum inlet water pressure	7 bar
Maximum pressure	225 bar
Operating pressure	150 bar
Maximum flow rate	8.7 L/min
Operating flow rate	7.5 L/min
Power cord length	5 m
IP code	IPX5
Sound power level (LWA)	99 dB(A)
Weight	25 Kg
Dimensions	970 x 400 x 450 mm
Weight with packaging	28.5 Kg
Packaging dimensions	450 x 430 x 1025 mm
Barcode	5604612705343



1 L detergent tank



Detergent dosing button



Built-in hose reel

### Packaging content

- > Trigger gun;
- > Steel armed hose holder;
- > Lance with spray nozzle;
- > Turbo lance with spray nozzle;
- > Hose quick-release coupling;
- > Gun holder;
- > Water inlet filter;
- > Cleaning needle for nozzle.

Accessories Page 122

VIML70

## Petrol high pressure washer 250bar



Find out more:

### Main features:

- > Aluminium pump body, brass head;
- > 8m steel armed hose;
- > Carrying handle;
- > Adjustable stop and jet.

### Technical data

Type of motor	4-ST combustion
Engine power	7 hp / 5.2 kW
Engine displacement	207 cc
Rotation speed	3400 rpm
Fuel	Petrol 95
Running time	2 hours
Engine oil	15W-40
Maximum inlet water pressure	7 bar
Maximum pressure	250 bar
Operating pressure	180 bar
Maximum flow rate	11.8 L/min
Operating flow rate	9 L/min
Sound power level (LWA)	106 dB(A)
Weight	31 Kg
Dimensions	650 x 1000 x 530 mm
Weight with packaging	33.5 Kg
Packaging dimensions	583 x 430 x 530 mm
Barcode	5604612710606



Spray nozzles



Detergent tank



Suction hose with filter

### Packaging content

- > Trigger gun;
- > Carrying handle;
- > Cleaning needle for nozzle;
- > Hose quick-release coupling;
- > Hose holder;
- > Gun holder;
- > Water inlet filter;
- > Box with 4 nozzles;
- > Spark plug wrench;
- > Wheels (x2);
- > Nozzle cleaning needle;
- > Detergent suction filter and hose;
- > Water suction hose;
- > Set of screws;
- > High pressure hose.

## Accessories for high pressure washers



VIMLFA



VIMLFAG

Reference	Designation	Compatible with:	📦	Ean
VIMLFA	SMALL WATER INLET FILTER	UNIVERSAL	4	5604612677534
VIMLFAG	BIG WATER INLET FILTER	UNIVERSAL	1	5604612684792

## Accessories for high pressure washers Powerwash



VIML150HQ.01.0181



VIMLPT225



VIML150HQ.01.018



VIML150HQ.01.019



VIML150HQ.01.019A

Reference	Designation	Compatible with:	📦	Ean
VIML150HQ.01.0181	LANCE	VIML150HQ / VIML150HQA	1	5604612690830
VIMLPT225	TURBO LANCE	VIML150HQ, VIML150HQA	1	5604612663537
VIML150HQ.01.018	GUN	VIML150HQ, VIML150HQA	1	5604612691660
VIML150HQ.01.019	STEEL ARMED HOSE - 5 METERS	VIML150HQ / VIML150HQA	1	5604612701932
VIML150HQ.01.019A	STEEL ARMED HOSE - 10 METERS	VIML150HQ / VIML150HQA	1	5604612691134

## Accessories for petrol high pressure washers



VIML65L.M.023



VIML65L.M.024



VIML65L.M.025



VIML65L.M.026

Reference	Designation	Compatible with:	📦	Ean
VIML65L.M.023	RED SPRAY NOZZLE	VIML65L / VIML70	1	5604612690793
VIML65L.M.024	GREEN SPRAY NOZZLE	VIML65L / VIML70	1	5604612690809
VIML65L.M.025	WHITE SPRAY NOZZLE	VIML65L / VIML70	1	5604612690816
VIML65L.M.026	BLACK SPRAY NOZZLE	VIML65L / VIML70	1	5604612690823



VIML65L.M.040



VIML65L.M.041



VIML65L.M.042



VIML65L.M.043

Reference	Designation	Compatible with:	📦	Ean
VIML65L.M.040	SUCTION HOSE WITH FILTER	VIML65L / VIML70	1	5604612697969
VIML65L.M.041	STEEL ARMED HOSE - 8 METERS	VIML65L / VIML70	1	5604612680787
VIML65L.M.042	GUN	VIML65L, VIML70	1	5604612680794
VIML65L.M.043	LANCE	VIML65L, VIML70	1	5604612680800

## Consumables



VIDMML5L



VIDFML5L

Reference	Designation	📦	Ean
VIDMML5L	MULTIPURPOSE DETERGENT	1	5604612693060
VIDFML5L	5L FAÇADE DETERGENT	1	5604612693077

# VACUUM CLEANERS AND ACCESSORIES



VIASL40

## Industrial wet and dry vacuum cleaner 40L



Find out more:

VIASL75

## Industrial wet and dry vacuum cleaner 75L



Find out more:

### Main features:

- > Built-in socket for power tools connection;
- > 40L stainless steel tank;
- > Features blowing function;
- > 2.75 m power cord.

### Technical data

Rated voltage	1200 W
Mains voltage	230 V - 50 Hz
Suction power	16 kPa
Airflow	1.9 m <sup>3</sup> /min
Tank capacity	40 L
Type of vacuumed materials	Solids/liquids
Vacuum cleaner type	With bag
Sound power level (LWA)	82 dB(A)
Weight	9.38 Kg
Dimensions	370 x 550 x 880 mm
Weight with packaging	12.33 Kg
Packaging dimensions	435 x 400 x 730 mm
Barcode	5604612647919



Two wheels with with 360° rotation



Socket for power tool connection



Included accessories

### Packaging content

- > HEPA filter;
- > Paper bag;
- > 2.5 m x 32 mm suction hose;
- > 470 mm suction tubes (x2);
- > Round brush;
- > Floor nozzle for vacuum liquids;
- > Floor nozzle for vacuum solids;
- > Upholstery nozzle;
- > Crevice nozzle;
- > Adaptor.

Accessories Page 128

### Main features:


- > Two motors that run independently;
- > Folding waste tank;
- > 75L stainless steel tank;
- > Anti-static chain;
- > 5.5 m power cord.

### Technical data

Rated voltage	2400 W ( 2 x 1200 W )
Mains voltage	230 V - 50 Hz
Suction power	16.5 kPa
Airflow	2.5 m <sup>3</sup> /min
Tank capacity	75 L
Type of vacuumed materials	Solids/liquids
Vacuum cleaner type	Without bag
Sound power level (LWA)	88 dB(A)
Weight	18.34 Kg
Dimensions	520 x 670 x 940 mm
Weight with packaging	24.53 Kg
Packaging dimensions	690 x 575 x 930 mm
Barcode	5604612685218



Two motors that run independently



Drain hose



Included accessories

### Packaging content

- > HEPA filter;
- > Paper bag;
- > 3 m x 40 mm suction hose;
- > Liquid drain hose;
- > 480 mm suction tubes (x2);
- > Floor nozzle for vacuum liquids;
- > Floor nozzle for vacuum solids;
- > Upholstery nozzle;
- > Crevice nozzle.

Accessories Page 128



VIAG25

## Drywall vacum cleaner

1200W - 25L

**NEW**



Find out more:



### Main features:

- › Built-in socket for power tools connection;
- › Ideal for vacuuming fine powders;
- › Rubber-coated rear caster wheels;
- › 2m power cord.



Front directional wheels



Socket for power tool connection



VORTEX multi-cyclone technology

### Packaging content

- › Suction hose;
- › Suction tubes (x2);
- › Floor nozzle;
- › Upholstery nozzle;
- › Crevice nozzle;
- › Round suction accessory.

### Technical data

Rated voltage	1200 W
Mains voltage	230 V - 50 Hz
Suction power	17 - 21 kPa
Airflow	1.4 m <sup>3</sup> /min
Tank capacity	25 L
Type of vacuumed materials	Solids/liquids
Vacuum cleaner type	Without bag
Suction hose	3 m
Suction tubes	470 mm
Power cord length	5 m
Tank material	Plastic
Sound power level (LWA)	83 dB(A)
Weight	12 Kg
Dimensions	610 x 410 x 400 mm
Weight with packaging	14 Kg
Packaging dimensions	615 x 480 x 450 mm
Barcode	5604612729530

VIAS600

## Vacuum/blower 600W



Find out more:

VIAC4

## Ash vacuum cleaner 800W - 4L

**NEW**



Find out more:

### Main features:

- > Features blowing/vacuuming function;
- > ON/OFF switch lock-on button;
- > Rubber tube.

### Technical data

Rated power	600 W
Mains voltage	230 V - 50 Hz
Air speed	120 Km/h
Maximum airflow	2.5 m <sup>3</sup> /s
No-load speed	16000 rpm
Collection bag capacity	0.7 L
Sound power level (LWA)	98 dB(A)
Weight	1.50 kg
Dimensions	430 x 170 x 200 mm
Weight with packaging	1.65 kg
Packaging dimensions	233 x 180 x 185 mm
Barcode	5604612705947



Simple change of carbon brushes



Dust and shavings collection bag

### Packaging content

- > Blowing and vacuuming tube;
- > Dust and shavings collection bag.

### Main features:

- > Compact vacuum cleaner;
- > Metal tube that allows access to the most difficult to vacuum areas;
- > Ideal for cleaning fireplaces, barbecues, wood cookers, pellets, etc.

### Technical data


Rated voltage	800 W
Mains voltage	230 V - 50 Hz
Suction power	15 kPa
Airflow	1.3 m <sup>3</sup> /min
Tank capacity	4 L
Type of vacuumed materials	Solids
Metal suction tube	230 mm
Type of filter	HEPA
Power cord length	1.5 m
Sound power level (LWA)	80 dB(A)
Weight	1.38 Kg
Dimensions	210 x 210 x 245 mm
Weight with packaging	1.74 kg
Packaging dimensions	310 x 308 x 389 mm
Barcode	5604612721428



Carrying handle



Washable HEPA particle filter



1m suction hose

### Packaging content

- > HEPA filter;
- > 1-meter suction hose;
- > Curved metal suction tube;
- > Cloth filter bag;
- > Suction nozzle.

Accessories Page 128



VIASC18B

## Ash blower/ vacuum cleaner

1200W - 18L



Find out more:

VIASC18T

## Ash blower/ vacuum cleaner

1400W - 18L

**NEW**



Find out more:

### Main features:

- > Features blowing function;
- > Steel tank (SPCC);
- > Ideal for cleaning fireplaces, barbecues, wood cookers, pellets, etc.

### Technical data

Rated voltage	1200 W
Mains voltage	230 V - 50 Hz
Suction power	17 kPa
Airflow	1.5 m <sup>3</sup> /min
Tank capacity	18 L
Type of vacuumed materials	Solids
Ash maximum temperature	50° C
Sound power level (LWA)	80 dB(A)
Weight	2.8 Kg
Dimensions	310 x 310 x 360 mm
Weight with packaging	3.88 Kg
Packaging dimensions	310 x 308 x 389 mm
Barcode	5604612690182

### Main features:

- > Features blowing function;
- > Steel tank (SPCC);
- > Power cord holder;
- > Ideal for cleaning fireplaces, barbecues, wood cookers, pellets, etc.

### Technical data

Rated voltage	1400 W
Mains voltage	230 V - 50 Hz
Suction power	18 kg
Airflow	1.7 m <sup>3</sup> /min
Tank capacity	18 L
Type of vacuumed materials	Solids
Ash maximum temperature	50° C
Sound power level (LWA)	76 dB(A)
Weight	3 Kg
Dimensions	290 x 370 x 293 mm
Weight with packaging	3.83 Kg
Packaging dimensions	310 x 308 x 389 mm
Barcode	5604612713010



Carrying handle



Washable HEPA particle filter

### Packaging content

- > HEPA filter;
- > 1-meter suction hose;
- > 200 mm metal suction tube.

Accessories Page 128



Carrying handle



Washable HEPA particle filter



"Tornado" HEPA filter cleaning system

### Packaging content

- > HEPA filter;
- > 1-meter suction hose;
- > 200 mm metal suction tube.

Accessories Page 128

## Accessories for dry vacuum cleaners



Reference	Designation	Compatible with:		Ean
VIAS11FH	HEPA FILTER	VIAS11	1	5604612690724
VIAS11SM	MICROFIBER DUST BAG	VIAS11	1	5604612690700
VIAS11CM	MICROFIBER BASKET	VIAS11	1	5604612690717

## Accessories for industrial wet and dry vacuum cleaners




Référence	Designation	Compatible avec :		Ean
VIASL40FH	HEPA FILTER	VIASL40	1	5604612681654
VIASL75FH	HEPA FILTER	VIASL75	1	5604612690731
VIASL75CM	MICROFIBER BASKET	VIASL75	1	5604612692636
VISAP	MICROFIBER DUST BAG	VIASL40	40	5604612653743
VIASL40.1.01.065	SET OF 5 PAPER BAGS	VIASL40	10	5604612640033

## Accessories for ash blower/vacuum cleaners



Reference	Designation	Compatible with:		Ean
VIASC18BFH	HEPA FILTER	VIASC18B	60	5604612690199
VIASC18AFH	HEPA FILTER	VIASC18A	60	5604612690007
VIAC4FH	HEPA FILTER	VIAC4	1	5604612721435
VIAC4FP	CLOTH FILTER BAG	VIAC4	1	5604612723279

# ACCESSORIES AND CONSUMABLES

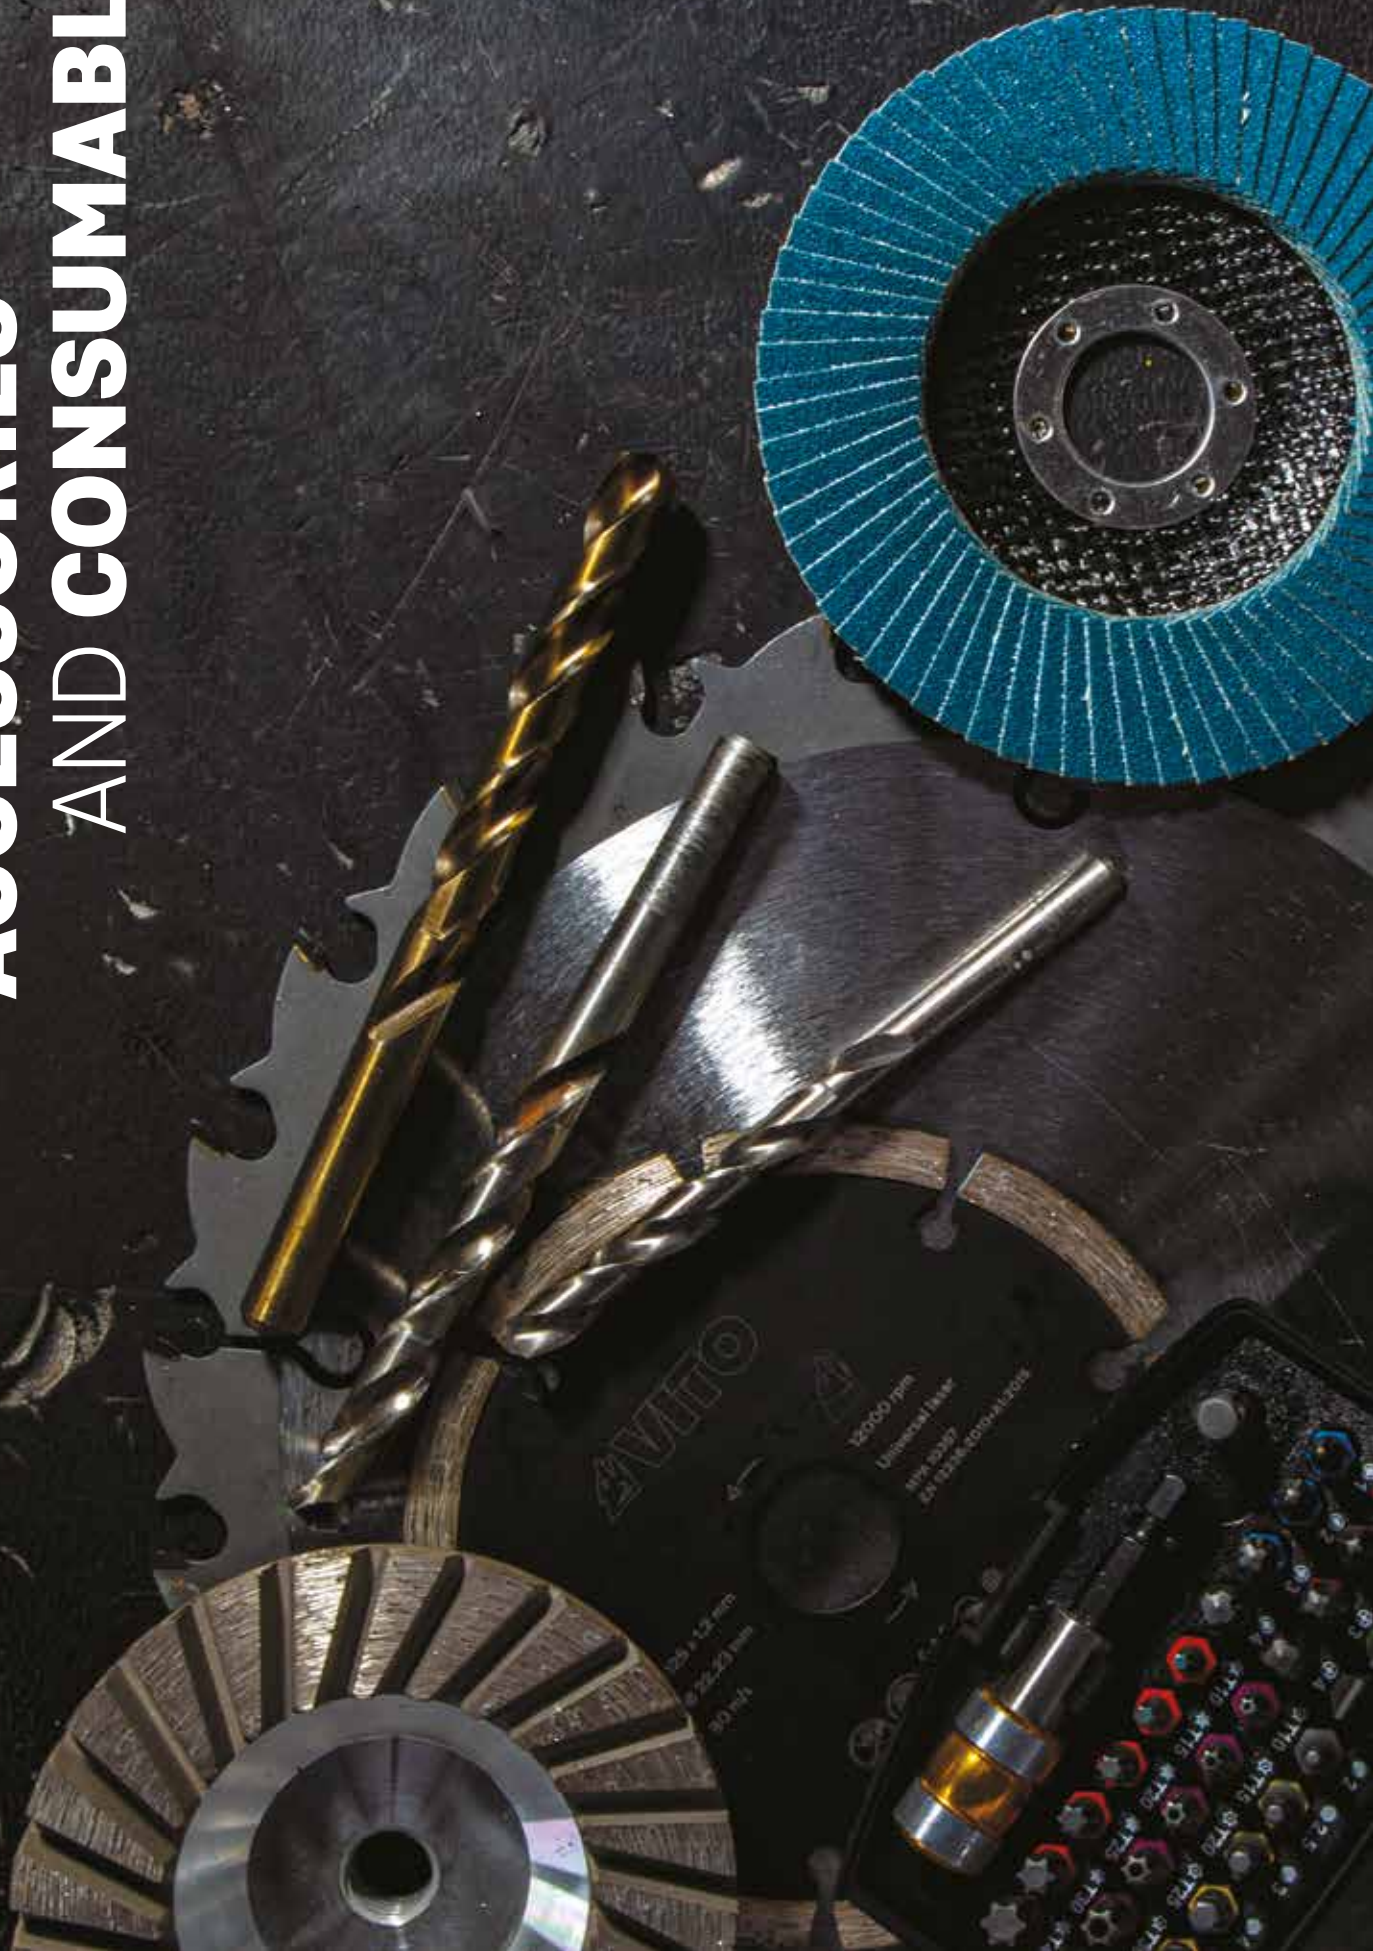



### Set of bits

19 pieces

> S2 steel.



#### Content:

- > 1 magnetic bit holder;
- > 2 pozidriv bits 25 mm: PZ1 and PZ2;
- > 2 slotted bits 25 mm: SL4 and SL6;
- > 2 phillips bits 25 mm: PH1 and PH2;
- > 2 hexagonal bits 25 mm: H4 and H5; 2 torx bits 25 mm: T20 and T25;
- > 2 tamper torx bits 25 mm: T20H and T25H;
- > 2 pozidriv bits 65 mm: PZ1 and PZ2; 2 slotted bits 65 mm: SL5 and SL6.5;
- > 2 phillips bits 65 mm: PH1 and PH2;
- > 2 pozidriv bits 65 mm: PZ1 and PZ2; 2 slotted bits 65 mm: SL5 and SL6.5;
- > 2 phillips bits 65 mm: PH1 and PH2.

Reference	Ean
VIB19	6 5604612666040

### Set of bits with mini ratchet

31 pieces

> S2 steel.



#### Content:

- > 1 mini ratchet;
- > 4 pozidriv bits: PZ1, PZ2, PZ3 and PZ4;
- > 4 slotted bits: SL3, SL4, SL5,5 and SL6.5;
- > 4 phillips bits: PH1, PH2, PH3 and PH4;
- > 6 torx bits: T10, T15, T20, T25, T30 and T40;
- > 6 tamper torx bits: T10H, T15H, T20H, T25H, T30H and T40H;
- > 6 hexagonal bits: H2, H2.5, H3, H4, H5 and H6.

Reference	Ean
VIB30	12 5604612687021

### Set of bits

32 pieces

> S2 steel.



#### Content:

- > 1 magnetic bit holder;
- > 1 adaptor 1/4";
- > 4 pozidriv bits: PZ1, PZ2, PZ3 and PZ4;
- > 4 slotted bits: SL3, SL4, SL5.5 and SL6.5;
- > 4 phillips bits: PH1, PH2, PH3 and PH4;
- > 6 torx bits: T10, T15, T20, T25, T30 and T40;
- > 6 tamper torx bits: T10H, T15H, T20H, T25H, T30H and T40H;
- > 6 hexagonal bits: H2, H2.5, H3, H4, H5 and H6.

Reference	Ean
VIB32	12 5604612666033

### Set of bits

33 pieces

> S2 steel.



#### Content:

- > 1 magnetic bit holder;
- > 1 adaptor 1/4";
- > 6 pozidriv bits 25 mm: PZ0, PZ1, 3 x PZ2 and PZ3;
- > 7 slotted bits 25 mm: SL2, SL3, SL4, SL5, SL5.5, SL6 and SL7;
- > 6 phillips bits 25 mm: PH0, PH1, 3 x PH2 e PH3;
- > 8 tamper torx bits 25 mm: T8H, T10H, T15H, T20H, T25H, T27H, T30H and T40H;
- > 4 hexagonal bits 25 mm: H3, H4, H5 and H6.

Reference	Ean
VIB33	12 5604612649845

### Set of bits and drills


32 pieces

> S2 steel.



#### Content:

- > 6 HSS drills for metal; with titanium coating: 1 · 2 · 3 · 4 · 5 · 6 mm;
- > 4 wood drills: 3 · 4 · 5 · 6 mm;
- > 4 tungsten carbide-tipped drills for wood 4 · 5 · 6 · 8 mm;
- > 3 slotted bits 25 mm: SL4, SL5, SL6.
- > 3 phillips bits 25 mm: PH1, PH2, PH3;
- > 3 pozidriv bits 25 mm: PZ1, PZ2, PZ3;
- > 3 square bits 25 mm: S1, S2, S3;
- > 4 torx bits 25 mm: T15, T20, T25, 30;
- > 1 drill index;
- > 1 magnetic bit holder.

Reference		Ean
VIBB32	5	5604612687052

### Set of bits and drills

50 pieces

> S2 steel.



#### Content:

- > 6 HSS drills for metal; with titanium coating: 2 · 3 · 4 · 5 · 6 · 8 mm;
- > 6 tungsten carbide-tipped drills for stone: 5 · 6 · 6 · 8 · 8 · 10 mm;
- > 5 wood drills: 4, 5, 6, 8, 10 mm;
- > 4 phillips bits 25 mm: PH0, PH1, PH2, PH3;
- > 5 slotted bits 25 mm: SL3, SL4, SL5, SL6, SL7;
- > 4 pozidriv bits 25 mm: PZ0, PZ1, PZ2, PZ3;
- > 6 hexagonal bits 25 mm: H3, H4, H5, H5, H6, H6;
- > 4 square bits 25 mm: S1, S2, S2, S3;
- > 7 torx bits 25 mm: T10, T15, T20, T25, T30, T35, T40;
- > 1 drill index;
- > 1 magnetic bit holder.

Reference		Ean
VIBB50	5	5604612687069

### Set of bits and drills

189 pieces

> S2 steel.



#### Content:

- > 11 HSS drills for metal with titanium coating 1.5 · 2 · 2,5 · 3 · 3.5 · 4 · 4.5 · 5 · 5.5 · 6 · 6.5 mm;
- > 5 tungsten carbide-tipped drills for stone: 4 · 5 · 6 · 8 · 10 mm;
- > 5 wood drills: 4 · 5 · 6 · 8 · 10 mm;
- > 9 hex keys: 5 · 6 · 7 · 8 · 9 · 10 · 11 · 12 · 13 mm;
- > 5 phillips bits 25 mm: PH1, PH1, PH2, PH2, PH3;
- > 3 slotted bits 25 mm: SL4, SL5, SL6;
- > 3 square bits 25 mm: S1, S2, S3;
- > 5 pozidriv bits 25 mm: PZ1, PZ1, PZ2, PZ2, PZ3;
- > 4 torx bits 25 mm: T15, T20, T25, T30;
- > 3 phillips bits 50 mm: PH1, PH2, PH3;
- > 3 slotted bits 50 mm: SL4, SL5, SL6;
- > 3 pozidriv bits 50 mm: PZ1, PZ2, PZ3;
- > 3 torx bits 50 mm: T15, T20, T25;
- > 3 wood spades: 13 mm · 16 mm · 19 mm;
- > 60 wall plugs;
- > 1 reamer;
- > 1 drill index;
- > 1 magnetic bit holder.

Reference		Ean
VIBB128	5	5604612687076



### Set of 38 impact driver bits


**NEW**

- > S2 steel;
- > Chrome vanadium steel.



#### Content:

- > 3 magnetic drive sockets: 8-10-13mm x 65mm;
- > 1 adaptor 1/4 x 1/4 x 60 mm;
- > 1 adaptor 1/4 x 1/4 x 50 mm;
- > 1 adaptor 1/4 x 3/8 x 50 mm;
- > 3 pozidriv bits 25 mm: PZ1, PZ2, PZ3;
- > 3 pozidriv bits 50 mm: PZ1, PZ2, PZ3;
- > 1 pozidriv bit 89 mm: PZ2;
- > 2 slotted bits 25 mm: SL5.5, SL6.5;
- > 1 slotted bit 89 mm: SL5.5;
- > 3 phillips bits 25 mm: PH1, PH2, PH3;
- > 3 phillips bits 50 mm: PH1, PH2, PH3;
- > 1 phillips bit 89 mm: PH2
- > 6 tamper torx bits 25 mm: T10H, T15H, T20H, T25H, T30H, T40H;
- > 8 torx bits 50 mm: T10, T15, T20, T20, T25, T25, T30, T30;
- > 1 torx bit 89 mm: T25.

Reference		Ean
VIBI38	10	5604612723309

### Set of 47 impact driver bits


**NEW**

- > S2 steel;
- > Chrome vanadium steel.



#### Content:

- > 2 slotted bits 25 mm: SL4, SL6;
- > 3 phillips bits 25 mm: PH1, PH2, PH3;
- > 3 pozidriv bits 25 mm: PZ1, PZ2, PZ3;
- > 8 torx bits 25 mm: T8, T10, T15, T20, T25, T27, T30, T40;
- > 8 tamper torx bits 25 mm: T8H, T10H, T15H, T20H, T25H, T27H, T30H, T40H;
- > 8 hexagonal bits 25 mm: H1.5, H2, H2.5, H3, H4, H5, H5.5, H6 mm;
- > 3 phillips bits 50 mm: PH1, PH2, PH3;
- > 2 pozidriv bits 50 mm: PZ1, PZ2;
- > 2 torx bits 50 mm: TH20, TH25;
- > 7 drive sockets 3/4 38mm: 6, 7, 8, 10, 11, 12, 13;
- > 1 adaptor 1/4 x 68 mm.

Reference		Ean
VIBI47	10	5604612723316

### Drive impact sockets for wheels

**NEW**

- > Chromium-molybdenum alloy steel (Cr-Mo);
- > Teflon-coated.



**Content:**

- > 3 drive impact sockets 1/2": 17 - 19 - 21mm.



Reference		Ean
VICI3MO	24	5604612723125

### Drive impact sockets Cr-Mo

**NEW**


- > Chromium-molybdenum alloy steel (Cr-Mo).



**Content:**

- > 8 drive impact sockets 1/2": 10 - 12 - 13 - 14 - 17 - 19 - 21 - 24 mm.



Reference		Ean
VICCI8MO	25	5604612723118

### Drive impact socket Cr-V

**NEW**

- > Chrome vanadium steel.



**Content:**

- > 8 drive impact sockets 1/2": 10 - 12 - 13 - 14 - 17 - 19 - 21 - 24 mm.



Reference		Ean
VICCI8	25	5604612723101

**Set of drill bits for stone**  
5 drill bits



- > 130°;
- > DIN 8039.

**Content:**  
> 4 · 5 · 6 · 8 · 10 mm.

Reference		Ean
VIBPC5	10	5604612677831

**Set of HSS Cobalt drill bits**  
8 drill bits



- > 135°;
- > DIN 338.

**Content:**  
> 3 · 4 · 5 · 6 · 7 · 8 · 9 · 10 mm.

Reference		Ean
VIBHSSC8	25	5604612680077

**Set of HSS drill bits**  
8 drill bits



- > 135°;
- > DIN 338.

**Content:**  
> 3 · 4 · 5 · 6 · 7 · 8 · 9 · 10 mm.

Reference		Ean
VIBHSS8	25	5604612677862

**Set of SDS-Plus drill bits**  
5 drill bits



**Content:**  
> 110 mm - 6 · 8 · 10 mm;  
> 160 mm - 8 · 10 · 12 mm.

Reference		Ean
VIBSDS6	10	5604612677893

**Set of HSS drill bits**  
19 drill bits



- > 135°;
- > DIN 338.

**Content:**  
1 · 1.5 · 2 · 2.5 · 3 · 3.5 · 4 · 4.5 · 5 · 5.5 · 6.5 mm;  
6 · 6.5 · 7 · 7.5 · 8 · 8.5 · 9 · 9.5 · 10 mm.

Reference		Ean
VIBHSS19	10	5604612677886



**Wood spade**

Reference	Diameter	Length		Ean
VIPUA10	10 mm	150 mm	100	5604612615703
VIPUA12	12 mm	150 mm	100	5604612615710
VIPUA14	14 mm	150 mm	100	5604612615727
VIPUA16	16 mm	150 mm	100	5604612615734
VIPUA18	18 mm	150 mm	100	5604612615741
VIPUA20	20 mm	150 mm	100	5604612615758
VIPUA22	22 mm	150 mm	100	5604612615765
VIPUA24	24 mm	150 mm	100	5604612615772
VIPUA26	26 mm	150 mm	100	5604612615789
VIPUA28	28 mm	150 mm	100	5604612615796
VIPUA30	30 mm	150 mm	100	5604612615802
VIPUA32	32 mm	150 mm	100	5604612615819
VIPUA34	34 mm	150 mm	100	5604612615826
VIPUA36	36 mm	150 mm	100	5604612615833
VIPUA38	38 mm	150 mm	100	5604612615840
VIPUA40	40 mm	150 mm	100	5604612615857

**HSS cobalt drill bit**

2 pieces

- > For metal;
- > 135°;
- > DIN 338.



Reference	Diameter	Length		Ean
VIHSSC21	1.0 mm	34 mm	200	5604612153922
VIHSSC21,5	1.5 mm	40 mm	200	5604612153946
VIHSSC22	2.0 mm	50 mm	200	5604612153960
VIHSSC22,5	2.5 mm	55 mm	200	5604612153984
VIHSSC23	3.0 mm	60 mm	200	5604612154059
VIHSSC23,5	3.5 mm	70 mm	200	5604612154028
VIHSSC24	4.0 mm	75 mm	200	5604612154042

**HSS cobalt drill bit**

- > For metal;
- > 135°;
- > DIN 338.



Reference	Diameter	Length		Ean
VIHSSC4,5	4.5 mm	77 mm	200	5604612031855
VIHSSC5	5.0 mm	82 mm	100	5604612031862
VIHSSC5,5	5.5 mm	90 mm	100	5604612031879
VIHSSC6	6.0 mm	92 mm	100	5604612031886
VIHSSC6,5	6.5 mm	100 mm	100	5604612031893
VIHSSC7	7.0 mm	108 mm	100	5604612031909
VIHSSC7,5	7.5 mm	108 mm	50	5604612031916
VIHSSC8	8.0 mm	116 mm	50	5604612031923
VIHSSC8,5	8.5 mm	117 mm	50	5604612031930
VIHSSC9	9.0 mm	122 mm	50	5604612031947
VIHSSC9,5	9.5 mm	125 mm	50	5604612031954
VIHSSC10	10 mm	134 mm	50	5604612031961
VIHSSC10,5	10.5 mm	130 mm	50	5604612031978
VIHSSC11	11.0 mm	140 mm	50	5604612031985
VIHSSC11,5	11.5 mm	140 mm	50	5604612031992
VIHSSC12	12.0 mm	148 mm	50	5604612032005
VIHSSC12,5	12.5 mm	148 mm	50	5604612032012
VIHSSC13	13.0 mm	150 mm	50	5604612032029

**Professional masonry drill bit**

- > For stone;
- > 130°;
- > DIN 8039.



Reference	Diameter	Length		Ean
VIBPP4	4 mm	80 mm	200	5604612654481
VIBPP5	5 mm	90 mm	100	5604612654498
VIBPP6	6 mm	100 mm	100	5604612654504
VIBPP7	7 mm	110 mm	100	5604612654511
VIBPP8	8 mm	115 mm	100	5604612654528
VIBPP9	9 mm	130 mm	50	5604612654535
VIBPP10	10 mm	140 mm	50	5604612654542
VIBPP11	11 mm	160 mm	50	5604612654559
VIBPP12	12 mm	160 mm	50	5604612654566
VIBPP13	13 mm	160 mm	50	5604612654573
VIBPP14	14 mm	160 mm	50	5604612654580
VIBPP15	15 mm	160 mm	50	5604612654597
VIBPP16	16 mm	160 mm	50	5604612654603
VIBPP18	18 mm	160 mm	50	5604612654610
VIBPP20	20 mm	160 mm	50	5604612654627

**Professional HSS twisted drill bit**

2 pieces

- > For metal;
- > 135°;
- > DIN 338.



Reference	Diameter	Length		Ean
VIHS22	2.0 mm	45 mm	100	5604612153588
VIHS22,5	2.5 mm	55 mm	100	5604612153595
VIHS23	3.0 mm	60 mm	100	5604612153601
VIHS23,5	3.5 mm	70 mm	100	5604612153618
VIHS24	4.0 mm	75 mm	100	5604612153632

**Professional HSS twisted drill bit**

- > For metal;
- > 135°;
- > DIN 338.



Reference	Diameter	Length		Ean
VIHS4,5	4.5 mm	80 mm	100	5604612116545
VIHS5	5.0 mm	85 mm	100	5604612116552
VIHS5,5	5.5 mm	90 mm	100	5604612116569
VIHS6	6.0 mm	90 mm	100	5604612116576
VIHS6,5	6.5 mm	100 mm	250	5604612116583
VIHS7	7.0 mm	105 mm	50	5604612116590
VIHS7,5	7.5 mm	108 mm	50	5604612116606
VIHS8	8.0 mm	115 mm	50	5604612116613
VIHS8,5	8.5 mm	115 mm	50	5604612116620
VIHS9	9.0 mm	124 mm	50	5604612116637
VIHS9,5	9.5 mm	125 mm	50	5604612116644
VIHS10	10.0 mm	130 mm	50	5604612116651
VIHS10,5	10.5 mm	130 mm	50	5604612116668
VIHS11	11.0 mm	140 mm	50	5604612116675
VIHS11,5	11.5 mm	140 mm	50	5604612116682
VIHS12	12.0 mm	150 mm	50	5604612116699
VIHS12,5	12.5 mm	150 mm	50	5604612116705
VIHS13	13.0 mm	150 mm	50	5604612116712

**SDS-Plus drill bit**

- > For stone;
- > 4-tipped head.



Reference	Diameter	Length		Ean
VISDSP5110	5 mm	110 mm	25	5604612688264
VISDSP6110	6 mm	110 mm	25	5604612688271
VISDSP8110	8 mm	110 mm	25	5604612688288
VISDSP6160	6 mm	160 mm	25	5604612688295
VISDSP8160	8 mm	160 mm	25	5604612688301
VISDSP10160	10 mm	160 mm	25	5604612688318
VISDSP12160	12 mm	160 mm	25	5604612688325
VISDSP6210	6 mm	210 mm	25	5604612688332
VISDSP8210	8 mm	210 mm	25	5604612688349
VISDSP10210	10 mm	210 mm	25	5604612688356
VISDSP12210	12 mm	210 mm	25	5604612688363
VISDSP14210	14 mm	210 mm	25	5604612688370
VISDSP10260	10 mm	260 mm	25	5604612688387
VISDSP12260	12 mm	260 mm	25	5604612688394

**Hole saw**

- > For ceramics.



Reference	Diameter	Length		Ean
VIBC33	33 mm	65 mm	6	5604612114183
VIBC53	53 mm	65 mm	6	5604612114190
VIBC63	63 mm	65 mm	6	5604612114206
VIBC73	73 mm	65 mm	6	5604612114381

**SDS-Plus core drill Bit**

- > For stone.



Reference	Diameter	Length		Ean
VIBCP30	30 mm	170 mm	10	5604612680534
VIBCP40	40 mm	170 mm	10	5604612680541
VIBCP50	50 mm	170 mm	10	5604612680558
VIBCP60	60 mm	170 mm	10	5604612680565
VIBCP65	65 mm	170 mm	10	5604612680572
VIBCP70	70 mm	170 mm	10	5604612680589
VIBCP75	75 mm	170 mm	10	5604612680596
VIBCP80	80 mm	170 mm	10	5604612680602
VIBCP90	90 mm	170 mm	10	5604612680619
VIBCP100	100 mm	170 mm	10	5604612680626
VIBCP125	125 mm	170 mm	10	5604612680633

**SDS-Hex adaptor  
for cored drill bit**

&gt; 110 mm.



Reference		Ean
VIAH110	10	5604612680657

**SDS-Max adaptor  
for core drill bit**

&gt; 250 mm.



Reference		Ean
VIASDSM250	10	5604612680640

**Centering drill**

&gt; 135 mm.



Reference		Ean
VIBC	6	5604612114213

**SDS-Max adaptor  
for SDS-Plus**

&gt; 230 mm.



Reference		Ean
VIASDSMP	25	5604612692063

**SDS-Plus pointed chisel**

&gt; 250 mm.



Reference		Ean
VIPSDSP250	50	5604612116750

**SDS-Plus flat chisel**

&gt; 250 mm x 20 mm.



Reference		Ean
VICSDSP250	50	5604612116798

**SDS-Hex pointed chisel**

&gt; 390 mm.



Reference		Ean
VIPHEX30390	6	5604612680763

**SDS-Hex flat chisel**

&gt; 390 mm x 18 mm.



Reference		Ean
VICHEX30390	6	5604612680770

**SDS-Max pointed chisel**

&gt; 280 mm.



Reference		Ean
VIPDSM280	25	5604612116729

**SDS-Max pointed chisel**

&gt; 400 mm.



Reference		Ean
VIPDSM400	25	5604612116736

**SDS-Max pointed chisel**

&gt; 600 mm.



Reference		Ean
VIPDSM600	25	5604612116743

**SDS-Max spade  
chisel**

&gt; 300 mm x 80 mm.



Reference		Ean
VICSDSM300	25	5604612116767

**SDS-Max spade chisel**

&gt; 350 mm x 50 mm.



Reference		Ean
VICSDSM350	25	5604612116774

**SDS-Max spade  
chisel**

&gt; 400 mm x 25 mm.



Reference		Ean
VICSDSM400	25	5604612116781

**Set of hole saws**

9 pieces

> Bi-metal HSS.



**Content:**

- > 6 hole saws 22 · 29 · 35 · 44 · 51 · 64 mm;
- > 1 pilot drill 14 - 30 mm;
- > 1 hole saw arbor nut;
- > 1 hexagonal adaptor 32 - 152 mm.

Reference		Ean
VIJ9SC	10	5604612015473

**Set of hole saws**

10 pieces



**Content:**

- > 8 hole saws 25 · 32 · 38 · 44 · 51 · 57 · 63 · 68 mm;
- > 1 centering drill;
- > 1 hole saw holder.

Reference		Ean
VISC8	6	5604612018627

**Set of hole saws for ceramics**

6 pieces

> Tungsten-coated.



**Content:**

- > 4 hole saws 33 · 53 · 63 · 73 mm;
- > 1 centering drill;
- > 1 hole saw holder.

Reference		Ean
VIFC6	24	5604612114176

**Drill chuck wrench**

> 13 mm.



Reference		Ean
VICB13	20	5604612010058

**Hole saw holder**

> 33 - 83 mm.



Reference		Ean
VISB3383	6	5604612114220

**Step drill bits NEW**



Reference		Ean
VIBEHSS5	30	5604612716769

- > 5 sharp-tipped drill bits with:  
6-35mm, 4-22mm, 6-18mm and 4-12mm (2x).

**Bit holder**

- > 1/4";
- > Chrome vanadium.



Reference	Dimensions		Ean
VIBIA	6 x 65 mm	12	5604612026110

**Magnetic bit holder**

- > 1/4";
- > Chrome vanadium.



Reference	Dimensions		Ean
VIAM6	6 x 65 mm	50	5604612629380
VIAM8	8 x 65 mm	50	5604612629397
VIAM10	10 x 65 mm	50	5604612629403
VIAM12	12 x 65 mm	50	5604612650193

**Set of hex shank socket adaptor for combi drill**

- > 1/2", 3/8" and 1/4";
- > Chrome vanadium.



Reference		Ean
VIACCB <b>NEW</b>	10	5604612704360

**Set of slotted bits**

10 pieces

- > 1/4";
- > S2 steel.



Reference	Dimensions		Ean
VIBFE3	SL 3 x 25 mm	50	5604612629236
VIBFE5	SL 5 x 25 mm	50	5604612629243
VIBFE6	SL 6 x 25 mm	50	5604612629250

**Set of pozidriv bits**

10 pieces

- > 1/4";
- > S2 steel.



Reference	Dimensions		Ean
VIBPZ1	PZ 1 x 25 mm	50	5604612629304
VIBPZ2	PZ 2 x 25 mm	50	5604612629311
VIBPZ3	PZ 3 x 25 mm	50	5604612629328

**Set of phillips bits**

10 pieces

- > 1/4";
- > S2 steel.



Reference	Dimensions		Ean
VIBPH0	PH 0 x 25 mm	50	5604612629267
VIBPH1	PH 1 x 25 mm	50	5604612629274
VIBPH2	PH 2 x 25 mm	50	5604612629281
VIBPH3	PH 3 x 25 mm	50	5604612629298

**Set of tamperproof torx bits**

10 pieces

- > 1/4";
- > S2 steel.



Reference	Dimensions		Ean
VIBTI15	T 15 x 25 mm	50	5604612629335
VIBTI20	T 20 x 25 mm	50	5604612629342
VIBTI25	T 25 x 25 mm	50	5604612629359
VIBTI30	T 30 x 25 mm	50	5604612629366
VIBTI40	T 40 x 25 mm	50	5604612629373

**Cement-glue mixing paddle**

> M14.



Reference	Dimensions		Ean
VIMR120	120 x 600 mm	6	5604612141714
VIMR140	140 x 600 mm	6	5604612140816

**Cement-glue mixing paddle**

> SW8.



Reference	Dimensions		Ean
VIM85	85 x 400 mm	12	5604612021894
VIM100	100 x 600 mm	6	5604612021900
VIM120	120 x 600 mm	6	5604612021917

**Mortar mixing paddle**

**NEW**

> M14.



Reference	Dimensions		Ean
VIMR120A	120 x 600 mm	6	5604612725488
VIMR140A	140 x 600 mm	6	5604612725495

**Mortar mixing paddle**

**NEW**

> SW10.



Reference	Dimensions		Ean
VIM100A	100 x 600 mm	12	5604612725464
VIM120A	120 x 600 mm	6	5604612725471

**Stone cutting disc**



**Applications:**

> For cutting general masonry products, including concrete, stone and derivatives.

Reference	Outer diameter	Hole diameter	Disc thickness		Ean
VICP115	115 mm	22.23 mm	3.0 mm	25	5604612011147
VICP125	125 mm	22.23 mm	3.0 mm	25	5604612107697
VICP230	230 mm	22.23 mm	3.0 mm	25	5604612011161

**Metal cutting disc**



**Applications:**

> For cutting all types of iron.

Reference	Outer diameter	Hole diameter	Disc thickness		Ean
VICF115	115 mm	22.23 mm	3.0 mm	25	5604612011178
VICF125	125 mm	22.23 mm	3.0 mm	25	5604612107680
VICF230	230 mm	22.23 mm	3.0 mm	25	5604612011192

**Stainless steel cutting disc**



**Applications:**

> For cutting all types of steel.

Reference	Outer diameter	Hole diameter	Disc thickness		Ean
VIDI1151	115 mm	22.23 mm	1.0 mm	25	5604612012441
VIDI125	125 mm	22.23 mm	1.0 mm	25	5604612170776
VIDI230	230 mm	22.23 mm	2.0 mm	25	5604612108045

### Multi-purpose diamond grinding disc



#### Applications:

> For cutting a wide range of building materials including brick, concrete, natural stone, ceramics and floor slabs.

Reference	Outer diameter	Hole diameter	Disc thickness		Ean
VIDDM115	115 mm	M14	2.0 mm	6	5604612691677
VIDDM125	125 mm	M14	2.0 mm	6	5604612691684

### General construction laser-welded diamond disc



#### Applications:

> For cutting a wide range of building materials including brick, concrete, natural stone, ceramics and floor slabs.

Reference	Outer diameter	Inner hole	Segment height	Segment thickness		Ean
VIDLGO115	115 mm	22.23 mm	4 mm	1.6 mm	25	5604612696641
VIDLGO125	125 mm	22.23 mm	4 mm	1.6 mm	25	5604612696658
VIDLGO230	230 mm	22.23 mm	4 mm	2.8 mm	1	5604612696665

### General construction diamond disc pro



#### Applications:

> For cutting a wide range of building materials including brick, concrete, natural stone, ceramics and floor slabs.

Reference	Outer diameter	Inner hole	Segment thickness	Segment thickness		Ean
VIDGOP115	115 mm	22.23 mm	12 mm	2.0 mm	1	5604612706340
VIDGOP125	125 mm	22.23 mm	12 mm	2.0 mm	1	5604612706357
VIDGOP230	230 mm	22.23 mm	12 mm	2.6 mm	1	5604612706364

### Universal turbo diamond disc



#### Applications:

> For cutting a wide range of building materials including brick, concrete, natural stone, ceramics and floor slabs.

Reference	Outer diameter	Hole diameter	Segment thickness	Segment thickness		Ean
VIDT115	115 mm	22.23 mm	8 mm	2.0 mm	6	5604612009458
VIDT125	125 mm	22.23 mm	8 mm	2.0 mm	6	5604612086657
VIDT230	230 mm	22.23 mm	8 mm	2.6 mm	6	5604612009465

### Universal turbo diamond disc Pro



#### Applications:

> For cutting a wide range of building materials including brick, concrete, natural stone, ceramics and floor slabs.

Reference	Outer diameter	Hole diameter	Segment thickness	Segment thickness		Ean
VIDT115P	115 mm	22.23 mm	8 mm	2.0 mm	6	5604612036898
VIDT230P	230 mm	22.23 mm	8 mm	2.6 mm	6	5604612036904

### Universal laser-welded diamond disc



#### Applications:

> For cutting a wide range of building materials including brick, concrete, natural stone, ceramics and floor slabs.

Reference	Outer diameter	Hole diameter	Segment thickness	Segment thickness		Ean
VIDL115	115 mm	22.23 mm	8 mm	2.0 mm	6	5604612009427
VIDL125	125 mm	22.23 mm	8 mm	2.0 mm	6	5604612170516
VIDL230	230 mm	22.23 mm	8 mm	2.6 mm	6	5604612009441

**Universal  
laser-welded  
diamond  
disc Pro**



**Applications:**

> For cutting a wide range of building materials including brick, concrete, natural stone, ceramics and floor slabs.

Reference	Outer diameter	Hole diameter	Segment thickness	Segment thickness		Ean
VIDL115P	115 mm	22.23 mm	8 mm	2.0 mm	6	5604612036874
VIDL230P	230 mm	22.23 mm	8 mm	2.6 mm	6	5604612036881

**Ultra thin  
ceramic cutting  
disc**



**Applications:**

> For cutting tiles, ceramics, etc.

Reference	Outer diameter	Inner hole	Segment thickness	Segment thickness		Ean
VIDCC115	115 mm	22.23 mm	10 mm	1.0 mm	25	5604612696610
VIDCC125	125 mm	22.23 mm	10 mm	1.0 mm	25	5604612696627
VIDCC230	230 mm	22.23 mm	10 mm	1.4 mm	1	5604612696634

**Ceramic  
diamond  
cutting  
disc**



**Applications:**

> For dry or wet manual cutting of tiles.

Reference	Outer diameter	Inner hole	Segment thickness	Segment thickness		Ean
VIDH180	180 mm	22.23 mm	8 mm	1.7 mm	6	5604612007836

**Iron  
cutting disc**



**Applications:**

> For cutting all types of iron.

Reference	Outer diameter	Inner hole	Disc thickness		Ean
VICF355	355 mm	25.4 mm	3.0 mm	3	5604612681623

**Tungsten carbide  
tipped blade  
for circular saw**



**Applications:**

> For cutting wood.

Reference	Outer diameter	Inner hole	Disc thickness		Ean
VIDC140	140 mm	30 mm	1.4 mm	6	5604612025199
VIDC150	150 mm	10 mm	1.6 mm	6	5604612695163
VIDC160	160 mm	30 mm	1.8 mm	6	5604612025205
VIDC180	180 mm	35 mm	1.8 mm	6	5604612025212
VIDC185	185 mm	20 mm	2.0 mm	6	5604612679019
VIDC210	210 mm	30 mm	1.6 mm	6	5604612670801
VIDC216	216 mm	30 mm	1.8 mm	6	5604612654849
VIDC235	235 mm	30 mm	1.8 mm	6	5604612025229
VIDC250	250 mm	30 mm	1.8 mm	6	5604612698102
VIDC255	255 mm	25,4 mm	2.0 mm	6	5604612695606
VIDC305	305 mm	30 mm	3.0 mm	6	5604612710873
VIDC315	315 mm	30 mm	3.0 mm	6	5604612170738





### Wood cutting disc for angle grinder



#### Applications:

> For cutting wood and PVC.

Reference	Outer diameter	Inner hole	Disc thickness		Ean
VIDM115	115 mm	22.23 mm	1.8 mm	6	5604612037130
VIDM230	230 mm	22.23 mm	1.8 mm	6	5604612037147

### Metal grinding disc



#### Applications:

> For deburring ferrous and non-ferrous metals.


Reference	Outer diameter	Inner hole	Disc thickness		Ean
VIRE115	115 mm	22.23 mm	6.0 mm	12	5604612011208
VIRE125	125 mm	22.23 mm	6.0 mm	12	5604612107758
VIRE230	230 mm	22.23 mm	6.0 mm	12	5604612012120

### Zirconium oxide flap disc



#### Applications:

> For removing rust, deburring and cleaning metal.

Reference	Outer diameter	Inner hole	Grit		Ean
VIDL60	115 mm	22.23 mm	G 60	20	5604612628574
VIDL80	115 mm	22.23 mm	G 80	20	5604612628581
VIDL100	115 mm	22.23 mm	G 100	20	5604612628598
VIDL120	115 mm	22.23 mm	G 120	20	5604612628604

**Jig saw blade for metal**

5 pieces



- > HCS - carbon steel;
- > Bosch VB118.

Reference	Cutting capacity		Ean
VIFSTMEB	77 mm	50	5604612032999

**Jig saw blade for metal**

5 pieces



- > HCS - carbon steel;
- > Black & Decker VBD118.

Reference	Cutting capacity		Ean
VIFSTMEBD	77 mm	50	5604612009885

**Jig saw blade for wood**

5 pieces



- > HCS - carbon steel;
- > Bosch VB144.

Reference	Cutting capacity		Ean
VIFSTMAB	100 mm	50	5604612032982

**Jig saw blade for wood**

5 pieces



- > HCS - carbon steel;
- > Black & Decker VBD144.

Reference	Cutting capacity		Ean
VIFSTMABD	100 mm	50	5604612009892

**Blade for reciprocating saw - wood**

2 pieces



- > HCS - carbon steel.

Reference	Cutting capacity		Ean
VIFSSMA	6-100 mm	1	5604612708368

**Blade for reciprocating saw - metal**

2 pieces



- > M42 - Bimetal.

Reference	Cutting capacity		Ean
VIFSSME	3-8 mm	1	5604612708351

**Set of plunge router bits**

6 pieces



- > Tungsten-coated steel bits.


Reference		Ean
VICFR6M	5	5604612663568



### Twist knot wire cup brush

> M14.




Reference	Diameter	r.p.m.		Ean
VIETE70	70 mm	12500	6	5604612170226
VIETE100	100 mm	8500	6	5604612170219

### Corrugated wire cup brush

> M14.




Reference	Diameter	r.p.m.		Ean
VIETO80	80 mm	12500	6	5604612170196
VIETO100	100 mm	8500	6	5604612170202

### Rotary wire brush

> Inner hole: 13 mm;  
> Thickness: 9 mm.



Reference	Diameter	r.p.m.		Ean
VICAR100	100 mm	4500	6	5604612170103

### Grinding wheel for stone

> M14;  
> 50 m/s.




Reference	Diameter	r.p.m.		Ean
VIMP100	100 mm	13000	1	5604612036935

### Wire cup brush for combi drill

> 6 mm shank.



Reference	Diameter	r.p.m.		Ean
VICBT50	50 mm	4500	6	5604612170141
VICBT75	75 mm	4500	6	5604612170165

### Round cup brush for combi drill

> 6 mm shank.




Reference	Diameter	r.p.m.		Ean
VICBC50	50 mm	4500	6	5604612170110
VICBC75	75 mm	4500	6	5604612170134

### Pen-shaped brush for combi drill

> 6 mm shank.



Reference	Diameter	r.p.m.		Ean
VICBP25	25 mm	4500	6	5604612170172

**Cup grinding wheel with thread**

- > M4B;
- > M14;
- > 50 m/s;
- > Thickness: 55 mm.



Reference	Grit	r.p.m.		Ean
VIMTR16	G 16	8600	18	5604612033156
VIMTR20	G 20	8600	18	5604612033163
VIMTR24	G 24	8600	18	5604612033170
VIMTR30	G 30	8600	18	5604612033187
VIMTR36	G 36	8600	18	5604612033194
VIMTR40	G 40	8600	18	5604612033200
VIMTR60	G 60	8600	18	5604612033224
VIMTR80	G 80	8600	18	5604612033231
VIMTR100	G 100	8600	18	5604612033248
VIMTR120	G 120	8600	18	5604612033255
VIMTR220	G 220	8600	18	5604612033262

**Cup grinding wheel**

- > M4B;
- > 50 m/s;
- > Inner hole: 22 mm
- > Thickness: 55 mm.



Reference	Grit	r.p.m.		Ean
VIMT16	G 16	8600	18	5604612033040
VIMT20	G 20	8600	18	5604612033057
VIMT24	G 24	8600	18	5604612033064
VIMT30	G 30	8600	18	5604612033071
VIMT36	G 36	8600	18	5604612033088
VIMT40	G 40	8600	18	5604612033095
VIMT60	G 60	8600	18	5604612033118
VIMT80	G 80	8600	18	5604612033125
VIMT100	G 100	8600	18	5604612033019
VIMT120	G 120	8600	18	5604612033026

**Grinding wheel for bench grinder**

- > 150 mm.



Reference	Grinding wheel thickness	Grit		Ean
VIES150G36	20 mm	G 36	1	5604612725396
VIES150G60	20 mm	G 60	1	5604612725402

\* Suitable for VIES150 and VIES150A

**Grinding wheel for bench grinder**

- > 200 mm.



Reference	Grinding wheel thickness	Grit		Ean
VIES200G36	20 mm	G 36	1	5604612725419
VIES200G60	20 mm	G 60	1	5604612725426

\* Suitable for VIES150 and VIES150A

Reference	Grinding wheel thickness	Grit		Ean
VIESC200G80	40 mm	G 80	1	5604612725433

\* Suitable for VIESC150200

**Bonnet for polisher**

- > Wool.



Reference	Diameter		Ean
VIBP1200	180 mm	1	5604612693848

**Set of 186 accessories for mini rotary tool**




Reference		Ean
VIK186A	10	5604612677305



### Set of sanding disc - 8 holes

10 pieces

- > Velcro-type fastening;
- > Suitable for VILO300 and VILOP430.



Reference	Grit	Dimensions		Ean
VILO300DL60	P 60	125 mm	3	5604612709495
VILO300DL80	P 80	125 mm	3	5604612709501
VILO300DL100	P 100	125 mm	3	5604612708962
VILO300DL120	P 120	125 mm	3	5604612708979
VILO300DL150	P 150	125 mm	3	5604612708986
VILO300DL180	P 180	125 mm	3	5604612708993

### Set of rectangle sanding sheets - 8 holes

10 pieces

- > Velcro-type fastening;
- > Suitable for VILV250.



Reference	Grit	Dimensions		Ean
VILV250TL60	P 60	192 x 92 mm	3	5604612709044
VILV250TL80	P 80	192 x 92 mm	3	5604612709051
VILV250TL100	P 100	192 x 92 mm	3	5604612709068
VILV250TL120	P 120	192 x 92 mm	3	5604612709075
VILV250TL150	P 150	192 x 92 mm	3	5604612709099
VILV250TL180	P 180	192 x 92 mm	3	5604612709105

### Set of square sanding sheets - 6 holes

10 pieces

- > Velcro-type fastening;
- > Suitable for VILMB180.




Reference	Grit	Dimensions		Ean
VILMB180T60	P 60	100 x 110 mm	3	5604612709372
VILMB180T80	P 80	100 x 110 mm	3	5604612709389
VILMB180T100	P 100	100 x 110 mm	3	5604612709396
VILMB180T120	P 120	100 x 110 mm	3	5604612709402
VILMB180T150	P 150	100 x 110 mm	3	5604612709419
VILMB180T180	P 180	100 x 110 mm	3	5604612709426

### Set of 2 super de lixa - 5 furos

10 pieces

- > Velcro-type fastening;
- > Suitable for VILMB180.



Reference	Grit	Dimensions		Ean
VILMB180TR60	P 60	143 x 102 mm	3	5604612709433
VILMB180TR80	P 80	143 x 102 mm	3	5604612709440
VILMB180TR100	P 100	143 x 102 mm	3	5604612709457
VILMB180TR120	P 120	143 x 102 mm	3	5604612709464
VILMB180TR150	P 150	143 x 102 mm	3	5604612709471
VILMB180TR180	P 180	143 x 102 mm	3	5604612709488

### Set of sanding sheets for multi-pad sander

10 pieces

- > Velcro-type fastening;
- > Suitable for VIMLSF12 and VIMLSF12A.



Reference	Grit		Ean
VIMLSF12CL	P 80, G 100, G 120	1	5604612654214

**Set of sanding belts**  
10 pieces



Reference	Grit	Dimensions		Ean
VICL53340	P 40	533 x 75 mm	10	5604612029722
VICL53360	P 60	533 x 75 mm	10	5604612029746
VICL53380	P 80	533 x 75 mm	10	5604612029753
VICL533100	P 100	533 x 75 mm	10	5604612029760
VICL533120	P 120	533 x 75 mm	10	5604612029777
VICL56040	P 40	560 x 100 mm	10	5604612029784
VICL56060	P 60	560 x 100 mm	10	5604612029791
VICL56080	P 80	560 x 100 mm	10	5604612029807
VICL560100	P 100	560 x 100 mm	10	5604612029814
VICL560120	P 120	560 x 100 mm	10	5604612029821
VICL61040	P 40	610 x 100 mm	10	5604612029838
VICL61060	P 60	610 x 100 mm	10	5604612029852
VICL61080	P 80	610 x 100 mm	10	5604612029869
VICL610100	P 100	610 x 100 mm	10	5604612029876
VICL610120	P 120	610 x 100 mm	10	5604612029883

**Set of sanding disc**  
25 pieces


> Inner hole: 22 mm.



Reference	Grit	Dimensions		Ean
VIDL11524	P 24	115 mm	25	5604612029890
VIDL11536	P 36	115 mm	25	5604612029906
VIDL11540	P 40	115 mm	25	5604612029913
VIDL11550	P 50	115 mm	25	5604612029920
VIDL11560	P 60	115 mm	25	5604612029937
VIDL11580	P 80	115 mm	25	5604612029944
VIDL115100	P 100	115 mm	25	5604612029951
VIDL115120	P 120	115 mm	25	5604612029968
VIDL115150	P 150	115 mm	25	5604612029975

**Set of triangle sanding sheets**  
10 pieces


> Suitable for VILGE600 and VILGE710.



Reference	Grit	Dimensions		Ean
VILGE600TL60	P 60	285 mm	1	5604612689360
VILGE600TL80	P 80	285 mm	1	5604612689377
VILGE600TL120	P 120	285 mm	1	5604612689384
VILGE600TL150	P 150	285 mm	1	5604612689391
VILGE600TL180	P 180	285 mm	1	5604612689407
VILGE600TL240	P 240	285 mm	1	5604612689414

**Set of sanding discs**  
10 pieces


> Suitable for VILGE600.



Reference	Grit	Dimensions		Ean
VILGE600DL60	P 60	225 mm	1	5604612689308
VILGE600DL80	P 80	225 mm	1	5604612689315
VILGE600DL120	P 120	225 mm	1	5604612689322
VILGE600DL150	P 150	225 mm	1	5604612689339
VILGE600DL180	P 180	225 mm	1	5604612689346
VILGE600DL240	P 240	225 mm	1	5604612689353

**Set of sanding discs**  
10 pieces


> Suitable for VILGE710.



Reference	Grit	Dimensions		Ean
VILGE710DL60	P 60	225 mm	1	5604612703233
VILGE710DL80	P 80	225 mm	1	5604612703240
VILGE710DL120	P 120	225 mm	1	5604612703257
VILGE710DL150	P 150	225 mm	1	5604612703264
VILGE710DL180	P 180	225 mm	1	5604612703271
VILGE710DL220	P 220	225 mm	1	5604612703288

**Set of sanding discs**  
10 pieces


> Suitable for VILG800.



Reference	Grit	Dimensions		Ean
VILG800DL60	P 60	185 mm	1	5604612695545
VILG800DL80	P 80	185 mm	1	5604612695552
VILG800DL120	P 120	185 mm	1	5604612695569
VILG800DL150	P 150	185 mm	1	5604612695576
VILG800DL180	P 180	185 mm	1	5604612695583
VILG800DL240	P 240	185 mm	1	5604612695590


**Set of rutile welding electrodes - box**

> Current type (pole +/-) AC/DC.

Reference	Diameter	Dimensions	Current		Ean
VIER20	2 mm	350 mm	50-70 A	1188	5604612711597
VIER25	2.5 mm	350 mm	60-90 A	799	5604612711603
VIER32	3.2 mm	350 mm	90-140 A	528	5604612711610
VIER40	4.0 mm	350 mm	140-180 A	330	5604612711627


**Set of rutile welding electrodes - blister**

> Current type (pole +/-) AC/DC.

Reference	Diameter	Dimensions	Current		Ean
VIER20BL	2 mm	350 mm	50-70 A	16	5604612702915
VIER25BL	2.5 mm	350 mm	60-90 A	12	5604612702922
VIER32BL	3.2 mm	350 mm	90-140 A	10	5604612702939

**Set of stainless steel welding electrodes**

> Current type (pole +) AC/DC.

Reference	Diameter	Dimensions	Current		Ean
VIEAI20BL	2 mm	300 mm	30-50 A	16	5604612702892
VIEAI25BL	2.5 mm	300 mm	50-75 A	12	5604612702885
VIEAI32BL	3.2 mm	300 mm	75-110 A	10	5604612702908


**Set of E7018 basic welding electrodes - blister**

> Current type (pole +) AC/DC.

Reference	Diameter	Dimensions	Current		Ean
VIEB25BL	2.5 mm	350 mm	60-90 A	12	5604612705107
VIEB32BL	3.2 mm	350 mm	90-140 A	10	5604612705114


**Set of aluminium welding electrodes - blister**

> Current type (pole +) DC.

Reference	Diameter	Dimensions	Current		Ean
VIEA25BL	2.5 mm	350 mm	50-80 A	12	5604612672690

**Set of cast iron welding electrodes - blister**

> Current type (pole +) AC/DC.

Reference	Diameter	Dimensions	Current		Ean
VIEFF25BL	2.5 mm	300 mm	50-80 A	12	5604612702878









[www.vito-tools.com](http://www.vito-tools.com)

